


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 106.17 lm/W
MODEL	104L-CK5	I _{max} (cd)	2050	S/MH(C0/180)	1.21	
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.21	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4185.0	η UP,DN(C0-180)	0.5,49.5	
NOMINAL FLUX(lm)	4184.96	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.5,49.5	
LAMPS INSIDE	1	η up(%)	1.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220	η down(%)	99.0	CIBSE SHR MAX	1.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

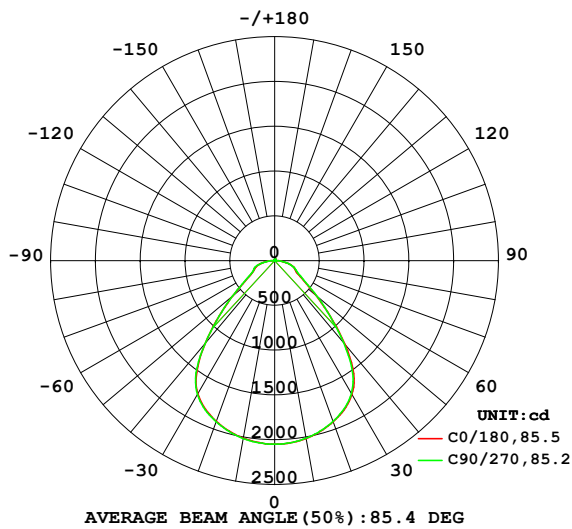

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

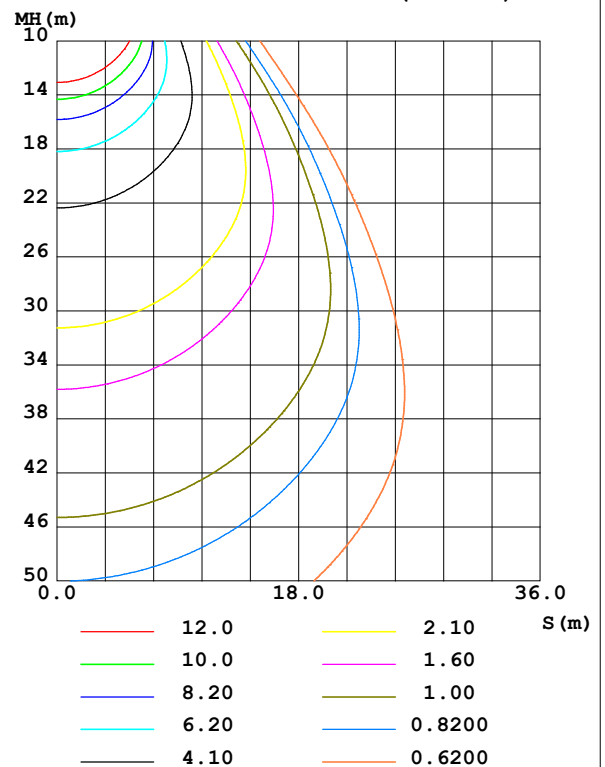

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2017	2017	2014	2012	2013	2016	2017	2016	0- 10	194.0	194.0	4.64,4.64
20	1914	1910	1909	1910	1909	1909	1914	1917	10- 20	556.5	750.5	17.9,17.9
30	1727	1726	1714	1710	1716	1726	1726	1722	20- 30	843.3	1594	38.1,38.1
40	1225	1240	1202	1234	1208	1241	1211	1254	30- 40	943.1	2537	60.6,60.6
50	602.5	716.5	615.3	560.6	607.7	720.8	616.8	564.4	40- 50	695.1	3232	77.2,77.2
60	302.8	393.4	323.6	239.0	304.6	396.9	315.8	237.4	50- 60	397.0	3629	86.7,86.7
70	232.9	233.0	233.7	167.6	228.9	238.3	242.2	156.4	60- 70	256.0	3885	92.8,92.8
80	125.9	117.2	130.0	127.9	133.2	119.0	128.7	119.7	70- 80	185.4	4070	97.3,97.3
90	3.832	3.700	3.686	4.623	4.248	4.687	4.580	5.011	80- 90	73.96	4144	99,99
100	2.207	2.190	2.288	2.390	2.859	2.771	2.778	2.767	90-100	2.419	4147	99.1,99.1
110	3.638	3.586	3.774	3.962	4.550	4.415	4.429	4.454	100-110	3.453	4150	99.2,99.2
120	5.448	5.380	5.623	5.853	6.583	6.413	6.440	6.442	110-120	5.004	4155	99.3,99.3
130	7.235	7.144	7.430	7.625	8.448	8.268	8.314	8.273	120-130	6.222	4161	99.4,99.4
140	8.817	8.751	8.984	9.161	9.982	9.839	9.898	9.815	130-140	6.674	4168	99.6,99.6
150	10.21	10.27	10.38	10.58	11.33	11.29	11.25	11.20	140-150	6.335	4174	99.7,99.7
160	11.90	11.99	12.06	12.28	12.91	12.88	12.79	12.80	150-160	5.333	4180	99.9,99.9
170	14.03	14.04	14.19	14.29	14.73	14.68	14.71	14.64	160-170	3.789	4184	100,100
180	15.41	15.28	15.52	15.36	15.43	15.32	15.52	15.40	170-180	1.420	4185	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2929.2 lm

%lum = 70.0%

%lamp = 70.0%

Conical surface Flux(130deg): 3764.9 lm

%lum = 90.0%

%lamp = 90.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2025-12-05


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz

Lamp Flux:4184.96x1 lm

NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

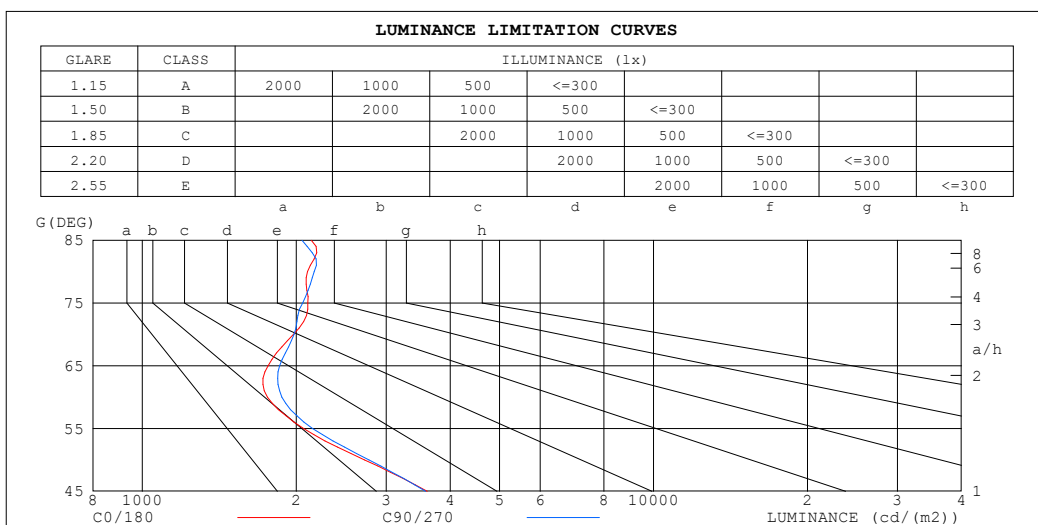


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

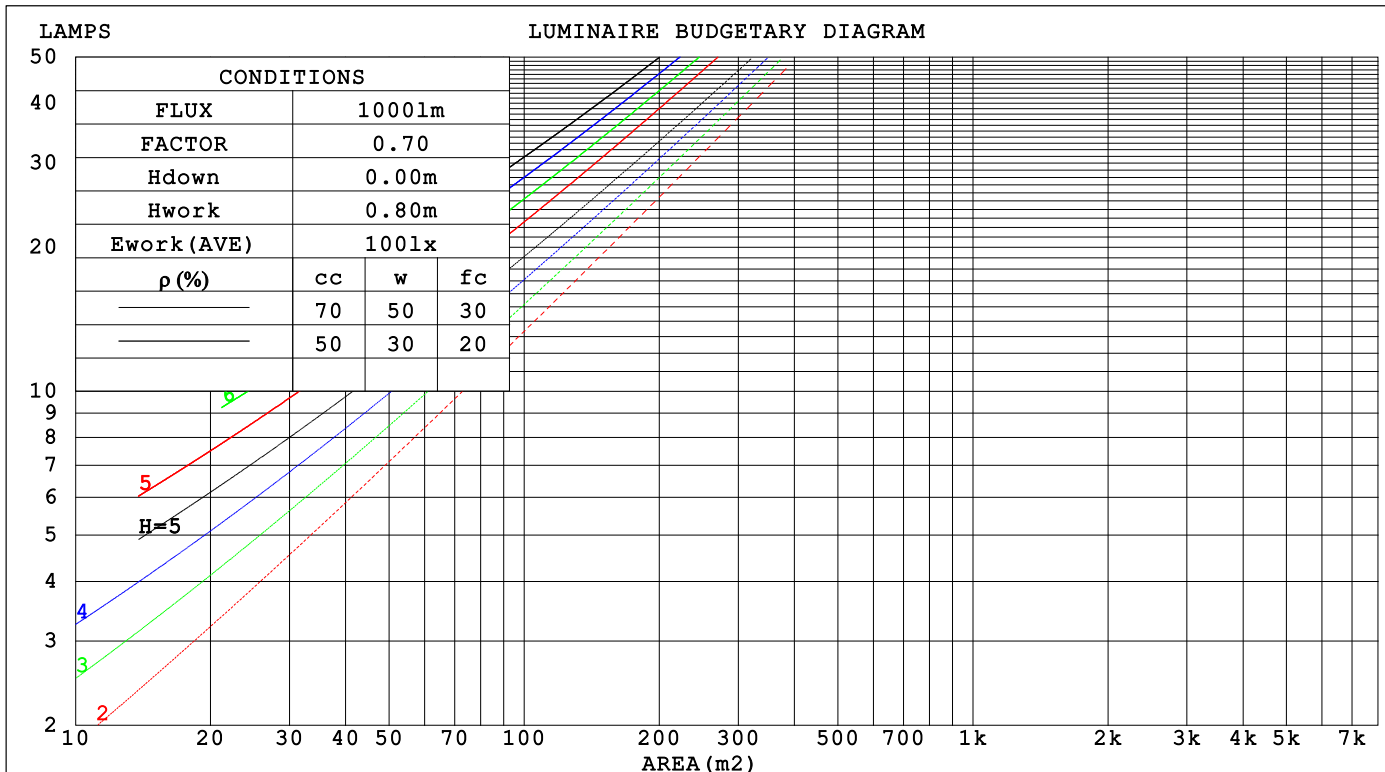

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.268	.152	.048	.260	.148	.047	.247	.141	.045	.234	.135	.043	.223	.129	.042		
2.0	.251	.137	.042	.245	.135	.041	.233	.129	.040	.222	.124	.039	.212	.120	.038		
3.0	.234	.124	.037	.228	.122	.037	.218	.118	.036	.208	.114	.035	.199	.110	.034		
4.0	.218	.113	.033	.213	.111	.033	.204	.108	.032	.195	.105	.032	.187	.102	.031		
5.0	.203	.104	.030	.199	.102	.030	.191	.099	.029	.183	.097	.029	.176	.094	.028		
6.0	.190	.095	.027	.187	.094	.027	.179	.092	.027	.173	.090	.026	.166	.088	.026		
7.0	.179	.088	.025	.176	.087	.025	.169	.085	.025	.163	.084	.024	.157	.082	.024		
8.0	.169	.082	.023	.166	.081	.023	.160	.080	.023	.154	.078	.023	.149	.077	.022		
9.0	.159	.077	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021	.142	.072	.021		
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.139	.069	.020	.135	.068	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.185	.164	.145	.158	.141	.125	.108	.097	.086	.062	.056	.050	.020	.018	.016		
2.0	.174	.140	.110	.149	.120	.095	.102	.083	.067	.059	.048	.039	.019	.016	.013		
3.0	.165	.122	.087	.141	.105	.075	.097	.073	.053	.056	.043	.031	.018	.014	.010		
4.0	.157	.108	.071	.134	.093	.061	.092	.065	.043	.053	.038	.026	.017	.012	.008		
5.0	.149	.097	.059	.128	.084	.051	.088	.059	.036	.051	.034	.021	.016	.011	.007		
6.0	.142	.089	.050	.122	.077	.044	.084	.054	.031	.049	.032	.018	.016	.010	.006		
7.0	.136	.081	.044	.117	.071	.038	.081	.050	.027	.047	.029	.016	.015	.010	.005		
8.0	.130	.076	.039	.112	.066	.034	.077	.046	.024	.045	.027	.014	.015	.009	.005		
9.0	.124	.071	.035	.107	.061	.030	.074	.043	.021	.043	.025	.013	.014	.008	.004		
10.0	.119	.066	.032	.102	.058	.028	.071	.041	.020	.041	.024	.012	.013	.008	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.: 6000K			DIM.:			SERIAL No.:				
MFR.: EVERFINE			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.5	10.8	9.8	11.0	11.2	9.5	10.8	9.8	11.0	11.3
3H	10.5	11.7	10.8	11.9	12.2	10.5	11.7	10.8	11.9	12.2
4H	11.2	12.3	11.5	12.6	12.9	11.2	12.3	11.5	12.6	12.8
6H	11.8	12.9	12.2	13.2	13.5	11.8	12.9	12.2	13.2	13.5
8H	12.1	13.1	12.4	13.4	13.7	12.1	13.1	12.4	13.4	13.7
12H	12.3	13.3	12.6	13.6	13.9	12.3	13.3	12.6	13.6	13.9
4H 2H	9.9	11.0	10.2	11.3	11.5	9.9	11.0	10.2	11.3	11.6
3H	11.1	12.1	11.5	12.4	12.7	11.1	12.1	11.5	12.4	12.7
4H	12.0	12.9	12.4	13.3	13.6	12.0	12.9	12.3	13.2	13.6
6H	12.8	13.6	13.2	14.0	14.4	12.8	13.6	13.2	14.0	14.4
8H	13.2	13.9	13.6	14.3	14.7	13.2	13.9	13.6	14.3	14.7
12H	13.5	14.2	13.9	14.6	15.0	13.4	14.1	13.9	14.5	14.9
8H 4H	12.3	13.0	12.7	13.4	13.8	12.2	13.0	12.6	13.4	13.8
6H	13.3	13.9	13.7	14.3	14.8	13.3	13.9	13.7	14.3	14.7
8H	13.8	14.3	14.2	14.8	15.2	13.7	14.3	14.2	14.7	15.2
12H	14.2	14.7	14.7	15.1	15.6	14.1	14.6	14.6	15.1	15.6
12H 4H	12.3	13.0	12.7	13.4	13.8	12.3	13.0	12.7	13.4	13.8
6H	13.4	14.0	13.9	14.4	14.9	13.4	13.9	13.8	14.4	14.8
8H	13.9	14.4	14.4	14.9	15.4	13.9	14.4	14.4	14.9	15.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				
1.5H	+ 0.4 / - 0.3					+ 0.4 / - 0.3				
2.0H	+ 0.8 / - 0.5					+ 0.8 / - 0.5				

CIE Pub.117, 4185 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.0)
Area: 0.345 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	67	57	51	66	57	51	65	57	51	46
0.80	77	67	61	76	67	61	74	66	60	54
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	81	76	89	81	75	86	79	74	68
1.50	94	86	80	93	85	80	90	83	79	72
2.00	100	93	87	98	91	86	94	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	105	100	95	103	98	94	99	95	92	84
4.00	108	104	100	106	102	98	102	98	96	87
5.00	110	106	103	108	104	101	103	101	98	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

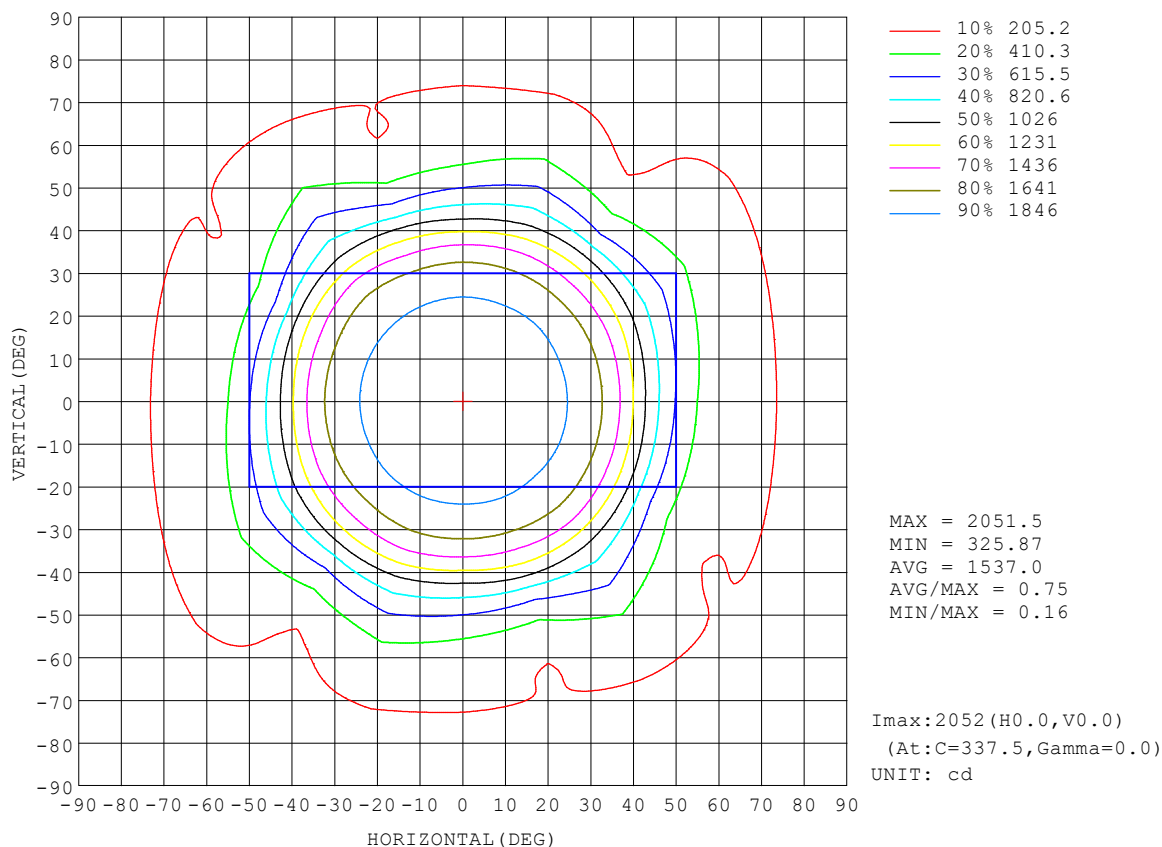


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

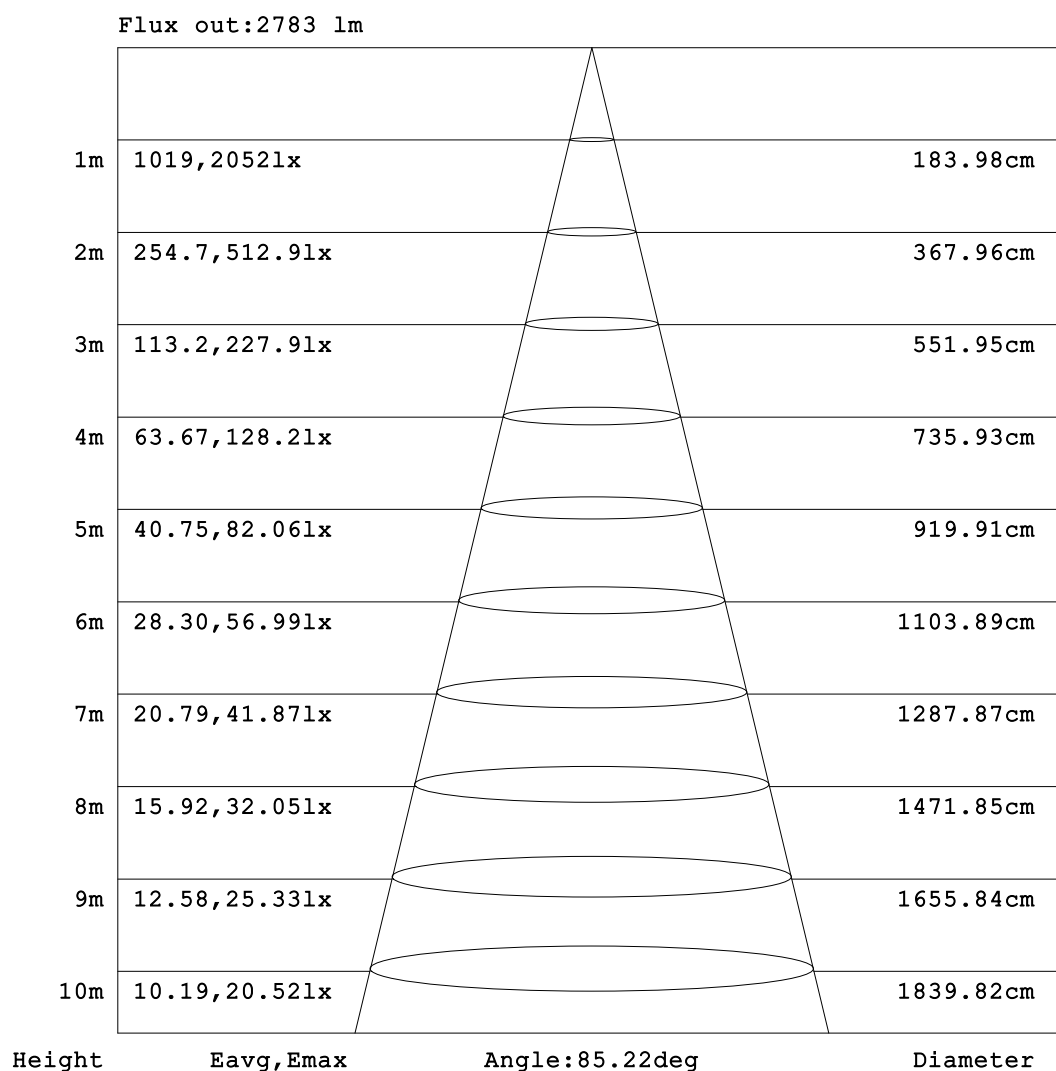


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

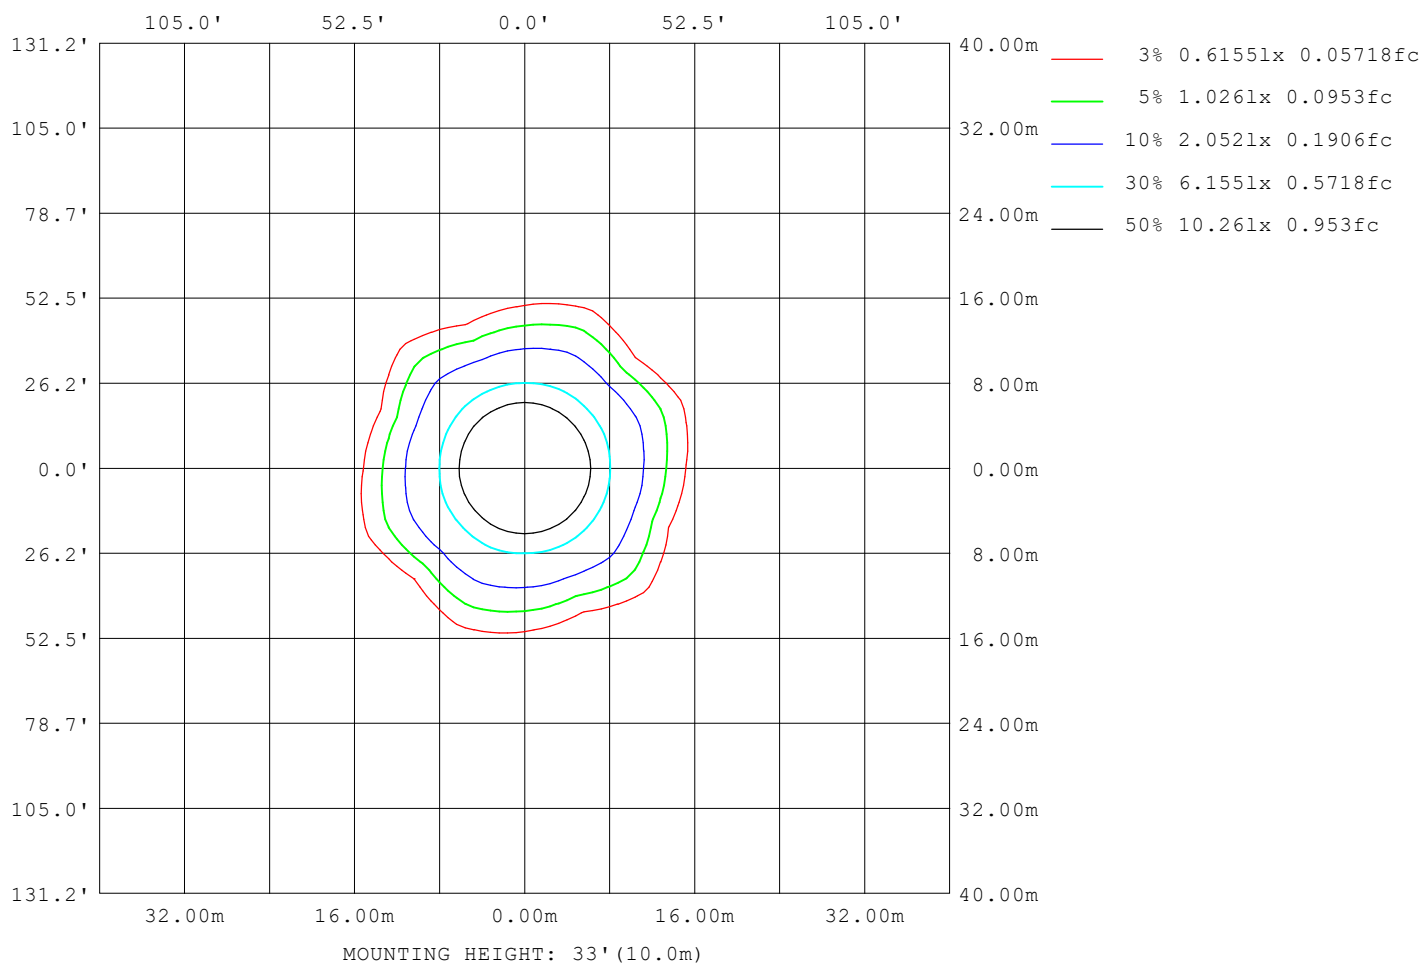

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1759
L_0~180 (75) av	2102
L_0~180 (85) av	2143
L_90~270 (65) av	1833
L_90~270 (75) av	2105
L_90~270 (85) av	2078
L_45 (65) av	1676
L_45 (75) av	1711
L_45 (85) av	2452

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

Planar Illuminance Curve

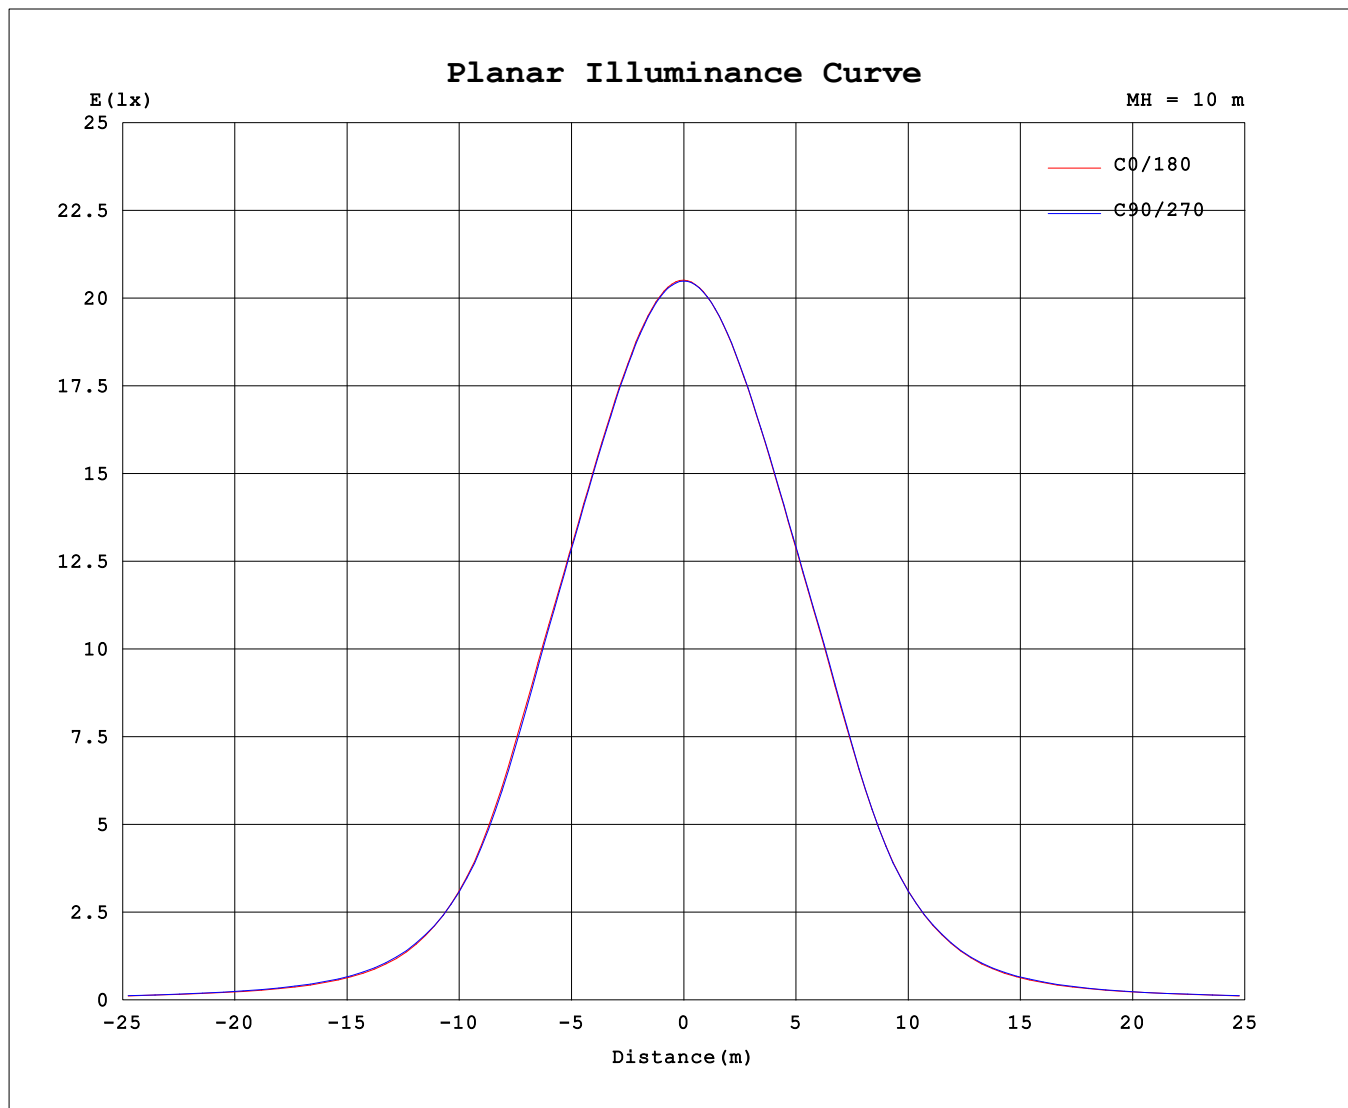

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.29V I:0.1742A P:39.417W PF:0.9826 Freq:50.00Hz Lamp Flux:4184.96x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.: 6000K									DIM.:						SERIAL No.:		
MFR.: EVERFINE									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050			
5	2042	2042	2041	2041	2041	2041	2040	2040	2040	2040	2041	2041	2041	2041	2042	2041			
10	2017	2017	2017	2016	2014	2014	2012	2012	2013	2013	2016	2015	2017	2016	2016	2016			
15	1974	1975	1973	1973	1970	1970	1968	1968	1970	1970	1971	1971	1974	1973	1974	1973			
20	1914	1915	1910	1913	1909	1910	1910	1908	1909	1909	1909	1910	1914	1913	1917	1914			
25	1836	1838	1831	1833	1829	1833	1832	1829	1829	1829	1830	1832	1837	1836	1840	1837			
30	1727	1728	1726	1719	1714	1719	1710	1716	1716	1715	1726	1719	1726	1725	1722	1726			
35	1539	1539	1552	1518	1516	1534	1510	1527	1519	1512	1558	1515	1533	1540	1525	1543			
40	1225	1233	1240	1234	1202	1249	1234	1240	1208	1223	1241	1216	1211	1254	1254	1261			
45	880	859	926	867	874	930	867	933	881	845	932	844	879	942	893	941			
50	603	549	716	548	615	695	561	697	608	542	721	540	617	717	564	699			
55	409	363	535	357	426	501	369	505	409	356	535	355	422	521	372	504			
60	303	251	393	244	324	379	239	376	305	248	397	244	316	384	237	376			
65	257	199	305	194	271	310	181	307	256	203	316	197	264	310	175	311			
70	233	200	233	197	234	246	168	248	229	202	238	204	242	250	156	256			
75	188	181	154	176	184	187	155	187	187	178	151	178	192	183	151	186			
80	126	127	117	123	130	142	128	138	133	122	119	128	129	133	120	127			
85	64.3	68.5	71.1	67.0	61.8	79.9	75.3	81.4	64.5	63.8	74.8	70.2	63.2	78.7	73.7	76.6			
90	3.83	4.09	3.70	3.77	3.69	5.20	4.62	5.49	4.25	3.91	4.69	4.14	4.58	4.93	5.01	4.85			
95	1.73	1.78	1.75	1.82	1.81	1.87	1.85	1.90	2.24	2.18	2.19	2.15	2.19	2.14	2.21	2.11			
100	2.21	2.26	2.19	2.31	2.29	2.36	2.39	2.39	2.86	2.80	2.77	2.77	2.78	2.69	2.77	2.63			
105	2.85	2.90	2.82	2.97	2.97	3.03	3.12	3.07	3.62	3.60	3.54	3.56	3.53	3.44	3.55	3.37			
110	3.64	3.70	3.59	3.77	3.77	3.83	3.96	3.88	4.55	4.53	4.41	4.47	4.43	4.34	4.45	4.25			
115	4.53	4.61	4.46	4.70	4.70	4.73	4.91	4.80	5.57	5.55	5.40	5.48	5.42	5.30	5.44	5.22			
120	5.45	5.53	5.38	5.64	5.62	5.65	5.85	5.73	6.58	6.58	6.41	6.51	6.44	6.31	6.44	6.20			
125	6.37	6.45	6.28	6.56	6.56	6.57	6.77	6.66	7.58	7.55	7.38	7.49	7.42	7.27	7.39	7.16			
130	7.24	7.31	7.14	7.45	7.43	7.42	7.62	7.53	8.45	8.42	8.27	8.36	8.31	8.14	8.27	8.05			
135	8.07	8.11	7.97	8.26	8.24	8.26	8.41	8.35	9.25	9.23	9.07	9.16	9.14	8.96	9.07	8.86			
140	8.82	8.84	8.75	9.02	8.98	9.03	9.16	9.10	9.98	9.97	9.84	9.90	9.90	9.71	9.82	9.63			
145	9.53	9.56	9.52	9.74	9.69	9.75	9.87	9.86	10.7	10.7	10.6	10.6	10.6	10.4	10.5	10.3			
150	10.2	10.3	10.3	10.4	10.4	10.4	10.6	10.6	11.3	11.3	11.3	11.2	11.3	11.1	11.2	11.0			
155	11.0	11.0	11.1	11.2	11.1	11.2	11.3	11.3	12.0	12.0	12.0	11.9	11.9	11.9	11.9	11.8			
160	11.9	12.0	12.0	12.1	12.1	12.2	12.3	12.3	12.9	12.9	12.9	12.8	12.8	12.7	12.8	12.7			
165	13.0	13.1	13.1	13.1	13.2	13.3	13.4	13.3	13.9	13.8	13.9	13.9	13.8	13.7	13.8	13.7			
170	14.0	14.1	14.0	14.1	14.2	14.4	14.3	14.3	14.7	14.6	14.7	14.8	14.7	14.6	14.6	14.7			
175	14.9	15.0	14.8	14.9	15.0	15.1	15.0	15.0	15.3	15.1	15.2	15.3	15.4	15.2	15.2	15.2			
180	15.4	15.4	15.3	15.4	15.5	15.5	15.4	15.4	15.4	15.3	15.3	15.4	15.5	15.4	15.4	15.5			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks: