


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 83.37 lm/W
MODEL	WL153-8W-D-5700K	I _{max} (cd/klm)	89.57	S/MH(C0/180)	1.77	
NOMINAL POWER(W)	8	LOR(%)	62.3	S/MH(C90/270)	1.75	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm/klm)	623.45	η UP, DN(C0-180)	7.4, 23.3	
NOMINAL FLUX(lm)	1000	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	7.9, 23.8	
LAMPS INSIDE	1	η up(%)	15.3	CIBSE SHR NOM	2.00	
TEST VOLTAGE(V)	230	η down(%)	47.1	CIBSE SHR MAX	2.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

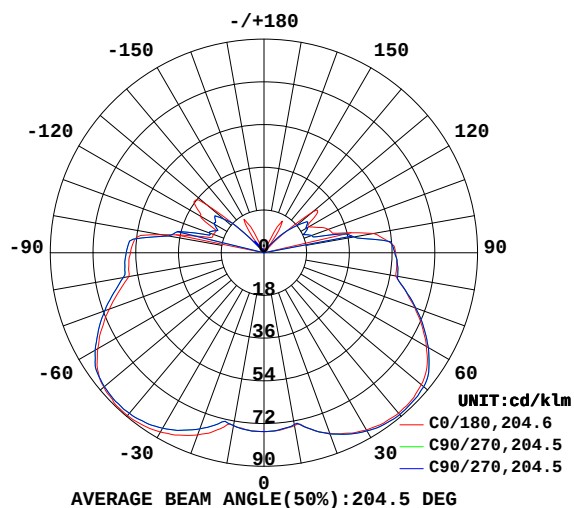

C0 PLANE ISOLUX DIAGRAM (UNIT:lx/klm)

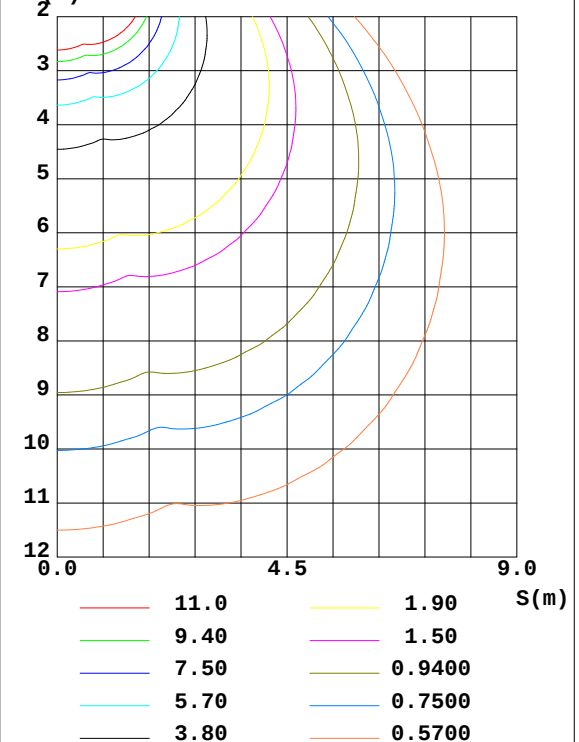

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.600m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	73.94	73.49	73.97	73.95					0- 10	7.124	7.124	1.14,0.71
20	80.95	81.22	81.65	78.95					10- 20	21.84	28.97	4.65,2.9
30	86.30	86.69	87.25	85.37					20- 30	38.86	67.82	10.9,6.78
40	88.26	89.01	89.55	88.24					30- 40	55.22	123.0	19.7,12.3
50	86.52	87.84	88.07	87.79					40- 50	68.45	191.5	30.7,19.1
60	79.00	79.95	80.88	82.18					50- 60	75.93	267.4	42.9,26.7
70	67.60	68.06	69.32	71.32					60- 70	74.30	341.7	54.8,34.2
80	56.39	57.17	57.82	60.20					70- 80	66.78	408.5	65.5,40.9
90	55.46	55.10	56.23	58.06					80- 90	62.30	470.8	75.5,47.1
100	46.93	38.50	44.11	40.93					90-100	57.17	528.0	84.7,52.8
110	28.96	21.45	22.68	24.47					100-110	33.24	561.2	90,56.1
120	21.97	21.10	31.00	24.18					110-120	23.13	584.3	93.7,58.4
130	27.04	17.59	31.41	22.10					120-130	23.53	607.9	97.5,60.8
140	1.173	5.874	1.182	4.605					130-140	9.608	617.5	99,61.7
150	15.42	0.9696	15.36	1.057					140-150	3.671	621.2	99.6,62.1
160	0.8654	0.9547	0.8651	0.8958					150-160	1.883	623.0	99.9,62.3
170	0.9204	0.9226	0.8887	0.8834					160-170	0.3294	623.4	100,62.3
180	0.8235	0.8116	0.8295	0.8116					170-180	0.0820	623.5	100,62.3
DEG	LUMINOUS INTENSITY:cd/klm									UNIT: lm/klm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

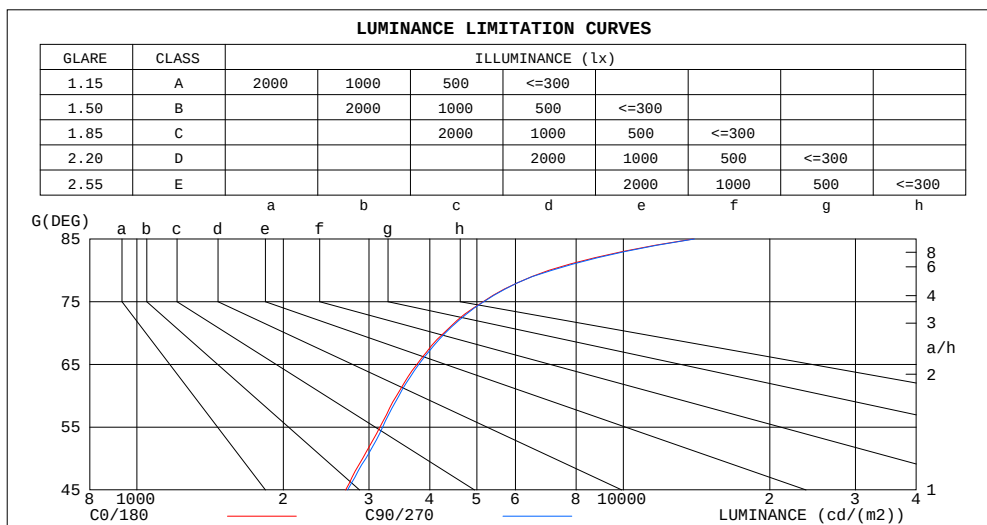

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	13931	14003
80	7023	7120
75	5150	5163
70	4274	4304
65	3762	3798
60	3417	3458
55	3160	3199
50	2911	2955
45	2686	2711


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.71	.71	.71	.67	.67	.67	.61	.61	.61	.55	.55	.55	.50	.50	.50	.47
1.0	.57	.54	.50	.54	.51	.48	.49	.46	.44	.44	.42	.40	.39	.37	.36	.33
2.0	.48	.43	.39	.46	.41	.37	.41	.37	.34	.37	.34	.31	.33	.30	.28	.26
3.0	.42	.36	.31	.39	.34	.30	.35	.31	.27	.31	.28	.25	.28	.25	.22	.20
4.0	.36	.30	.25	.34	.29	.24	.31	.26	.22	.27	.23	.20	.24	.21	.18	.16
5.0	.32	.26	.21	.30	.24	.20	.27	.22	.19	.24	.20	.17	.22	.18	.15	.14
6.0	.28	.22	.18	.27	.21	.17	.24	.19	.16	.22	.18	.15	.19	.16	.13	.12
7.0	.25	.20	.15	.24	.19	.15	.22	.17	.14	.19	.16	.13	.17	.14	.11	.10
8.0	.23	.17	.13	.22	.17	.13	.20	.15	.12	.18	.14	.11	.16	.13	.10	.09
9.0	.21	.15	.12	.20	.15	.11	.18	.14	.11	.16	.12	.10	.15	.11	.09	.08
10.0	.19	.14	.11	.18	.13	.10	.17	.12	.09	.15	.11	.09	.13	.10	.08	.07

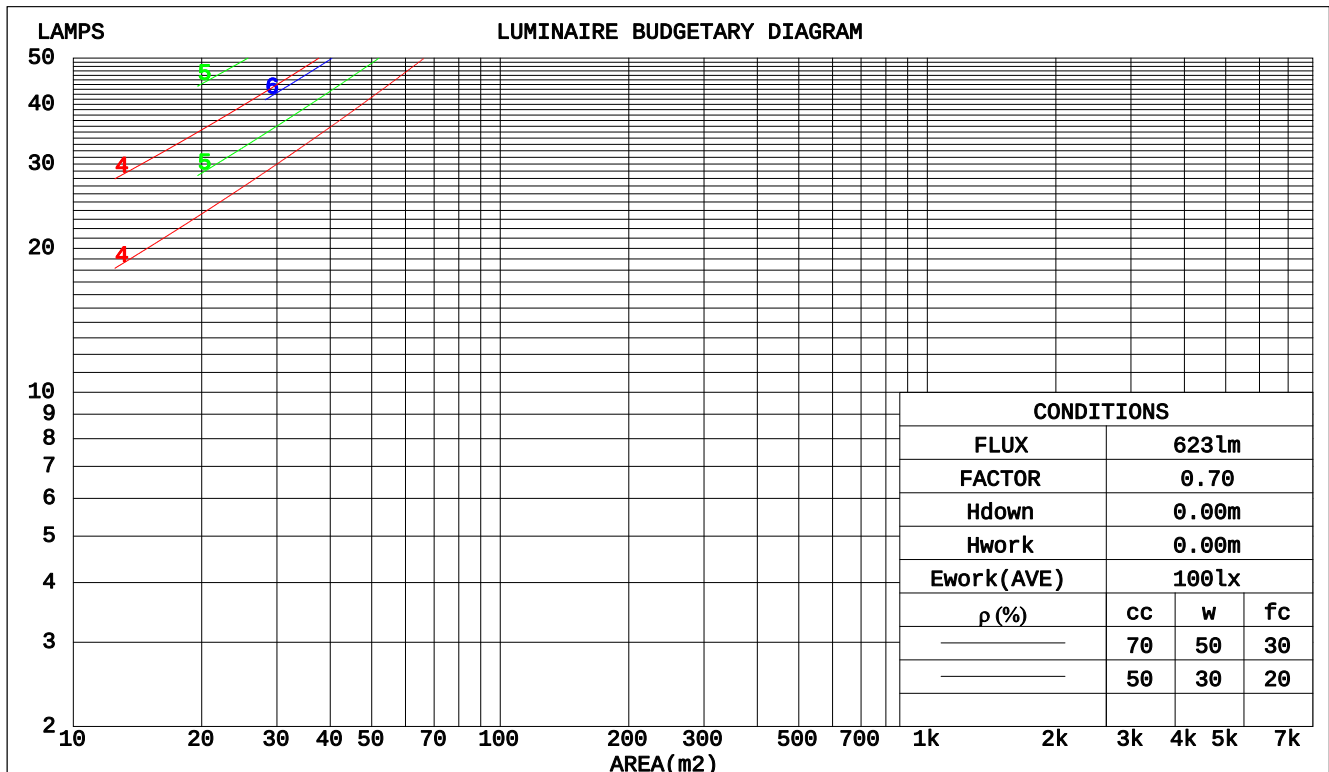

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm					
NAME: WL153-8W-D-5700K			TYPE: 8W		WEIGHT:
SPEC.: 5700K			DIM.:		SERIAL No.:
MFR.:			SUR.: 0.04624		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.265	.150	.048	.255	.146	.046	.238	.137	.044	.222	.128	.041	.208	.120	.039		
2.0	.223	.122	.038	.215	.118	.036	.199	.111	.034	.185	.104	.032	.171	.097	.031		
3.0	.195	.104	.031	.188	.101	.030	.174	.094	.029	.160	.088	.027	.148	.082	.025		
4.0	.174	.091	.027	.167	.088	.026	.154	.082	.024	.142	.076	.023	.131	.071	.022		
5.0	.157	.080	.023	.151	.078	.023	.139	.073	.021	.128	.068	.020	.118	.063	.019		
6.0	.143	.072	.021	.138	.070	.020	.127	.065	.019	.117	.061	.018	.107	.056	.017		
7.0	.132	.065	.018	.126	.063	.018	.117	.059	.017	.107	.055	.016	.098	.051	.015		
8.0	.122	.059	.017	.117	.058	.016	.108	.054	.015	.099	.050	.014	.091	.047	.014		
9.0	.113	.055	.015	.109	.053	.015	.100	.050	.014	.092	.046	.013	.085	.043	.012		
10.0	.106	.051	.014	.101	.049	.014	.094	.046	.013	.086	.043	.012	.079	.040	.011		

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.235	.235	.235	.201	.201	.201	.137	.137	.137	.079	.079	.079	.025	.025	.025	
1.0	.235	.214	.195	.201	.184	.168	.137	.126	.116	.079	.073	.068	.025	.024	.022	
2.0	.231	.200	.174	.198	.172	.151	.136	.119	.105	.078	.069	.062	.025	.022	.020	
3.0	.226	.190	.161	.194	.164	.140	.133	.114	.098	.077	.067	.058	.025	.022	.019	
4.0	.222	.183	.153	.190	.158	.133	.131	.110	.093	.076	.064	.055	.024	.021	.018	
5.0	.217	.177	.147	.186	.153	.128	.128	.107	.090	.074	.063	.054	.024	.020	.018	
6.0	.212	.172	.143	.182	.149	.124	.126	.104	.088	.073	.061	.052	.024	.020	.017	
7.0	.208	.168	.140	.179	.145	.122	.123	.102	.086	.072	.060	.051	.023	.020	.017	
8.0	.203	.164	.138	.175	.143	.120	.121	.100	.085	.070	.059	.051	.023	.019	.017	
9.0	.199	.161	.136	.172	.140	.119	.119	.099	.084	.069	.058	.050	.022	.019	.017	
10.0	.196	.159	.134	.169	.138	.117	.117	.097	.083	.068	.057	.050	.022	.019	.016	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm										
NAME: WL153-8W-D-5700K					TYPE: 8W			WEIGHT:		
SPEC.: 5700K					DIM.:			SERIAL No.:		
MFR.:					SUR.: 0.04624			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.6	16.9	16.1	17.5	18.2	15.6	17.0	16.2	17.6	18.3
3H	18.1	19.4	18.7	20.0	20.7	18.2	19.4	18.8	20.0	20.8
4H	19.5	20.7	20.1	21.3	22.1	19.5	20.7	20.2	21.4	22.1
6H	21.0	22.1	21.6	22.8	23.6	21.0	22.2	21.7	22.8	23.6
8H	21.9	23.0	22.6	23.7	24.5	21.9	23.0	22.6	23.7	24.5
12H	23.0	24.1	23.7	24.7	25.6	23.0	24.1	23.7	24.8	25.6
4H 2H	16.4	17.6	17.0	18.2	19.0	16.4	17.6	17.1	18.3	19.0
3H	19.1	20.2	19.8	20.9	21.7	19.2	20.2	19.8	20.9	21.7
4H	20.6	21.6	21.3	22.3	23.2	20.7	21.6	21.4	22.4	23.2
6H	22.3	23.2	23.1	23.9	24.8	22.4	23.2	23.1	24.0	24.8
8H	23.4	24.2	24.1	24.9	25.8	23.4	24.2	24.1	25.0	25.8
12H	24.6	25.3	25.3	26.1	27.0	24.6	25.4	25.4	26.1	27.0
8H 4H	21.2	22.0	22.0	22.8	23.7	21.3	22.1	22.0	22.8	23.7
6H	23.2	23.9	24.0	24.7	25.6	23.2	23.9	24.0	24.7	25.6
8H	24.4	25.1	25.2	25.8	26.8	24.5	25.1	25.3	25.9	26.8
12H	25.9	26.5	26.7	27.3	28.2	26.0	26.5	26.7	27.3	28.3
12H 4H	21.4	22.1	22.1	22.9	23.8	21.4	22.2	22.1	22.9	23.8
6H	23.5	24.1	24.3	24.9	25.8	23.5	24.1	24.3	24.9	25.9
8H	24.8	25.4	25.6	26.2	27.2	24.9	25.4	25.7	26.2	27.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 1000 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.0$)
Area: 0.04624 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	26	18	13	26	18	13	24	17	13	9
0.80	32	23	18	31	23	18	29	22	17	12
1.00	37	28	22	35	27	22	33	27	21	15
1.25	41	32	27	39	31	26	36	30	25	18
1.50	44	36	30	42	35	29	39	33	28	21
2.00	49	41	36	47	40	35	43	37	33	24
2.50	52	45	39	50	43	38	45	40	36	27
3.00	55	48	43	52	46	41	47	43	39	29
4.00	58	52	47	55	50	46	50	46	42	32
5.00	60	55	51	57	52	49	52	48	45	34
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

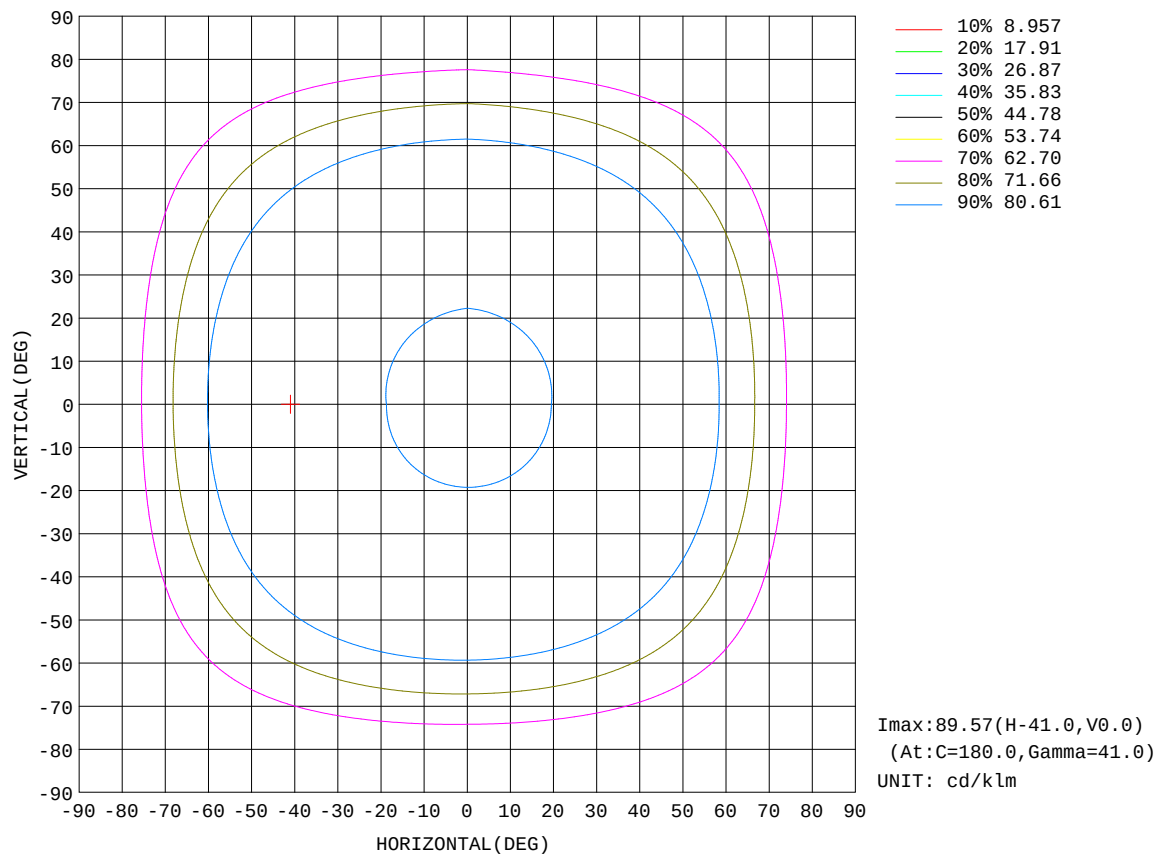


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

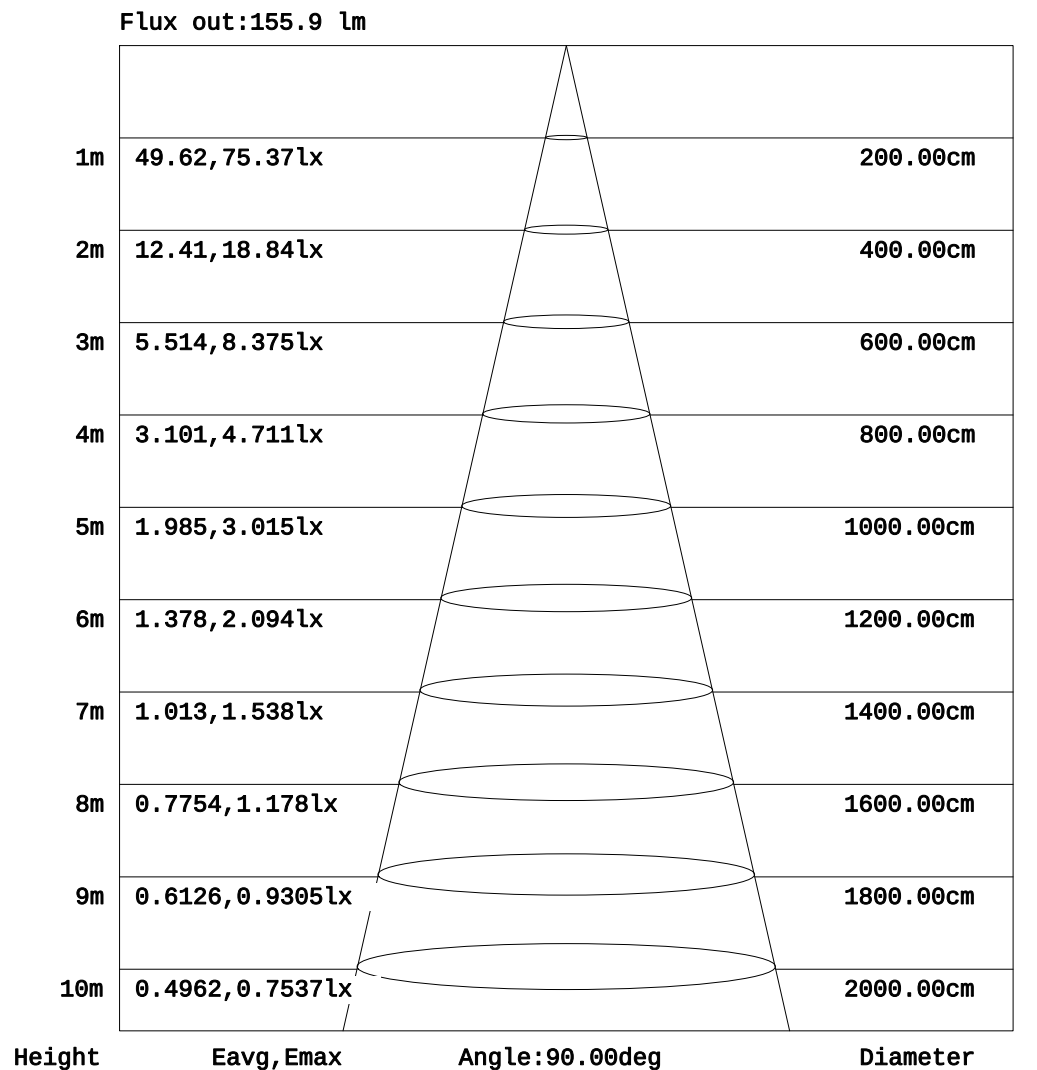


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

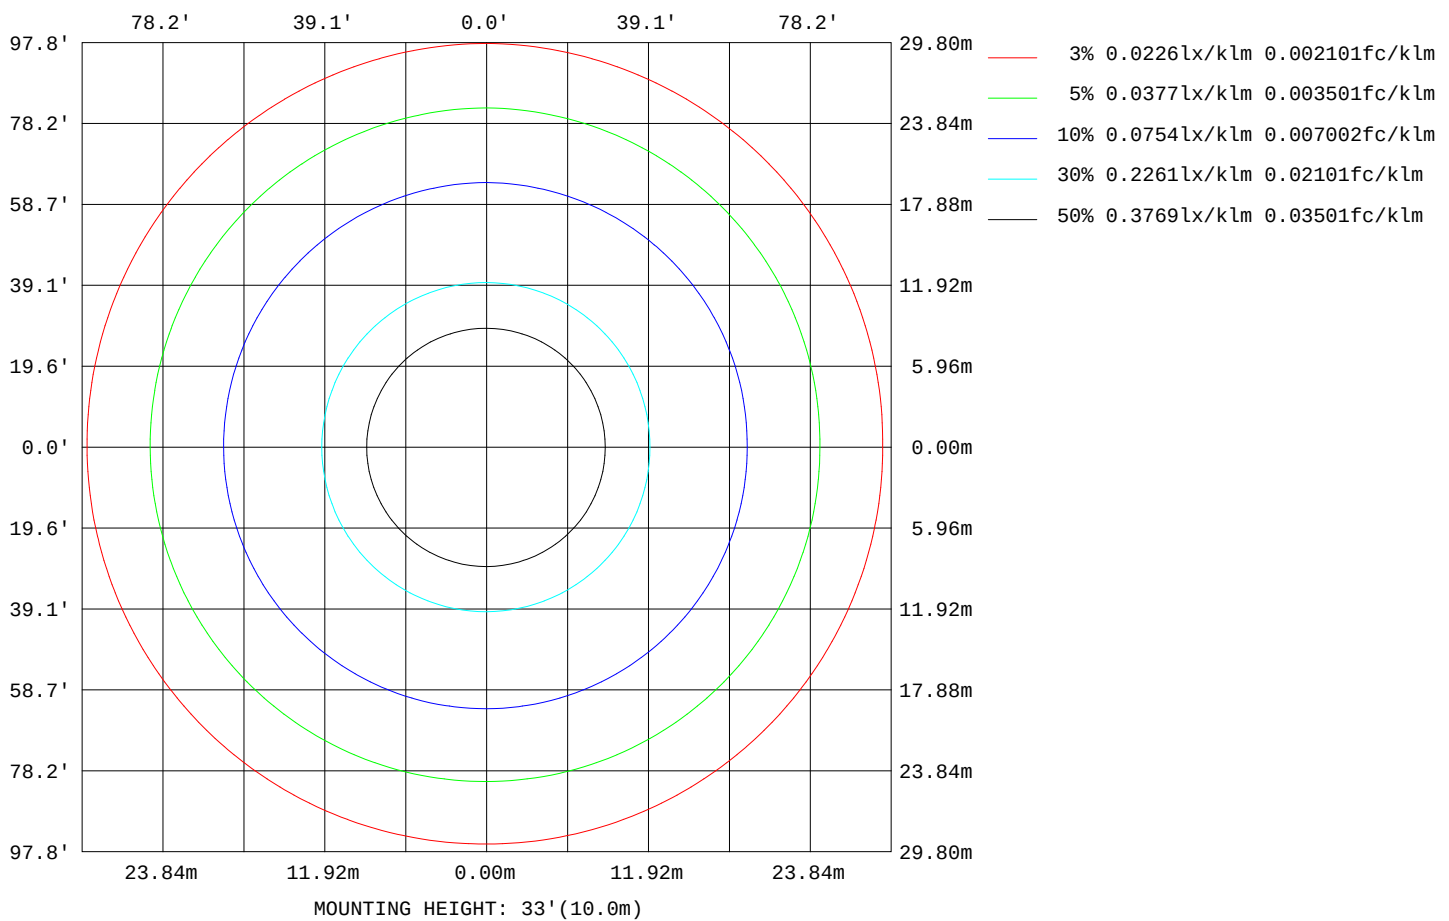

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.600m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3808
L_0~180(75)av	5218
L_0~180(85)av	14055
L_90~270(65)av	3868
L_90~270(75)av	5321
L_90~270(85)av	14300
L_45(65)av	3848
L_45(75)av	5286
L_45(85)av	14216

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

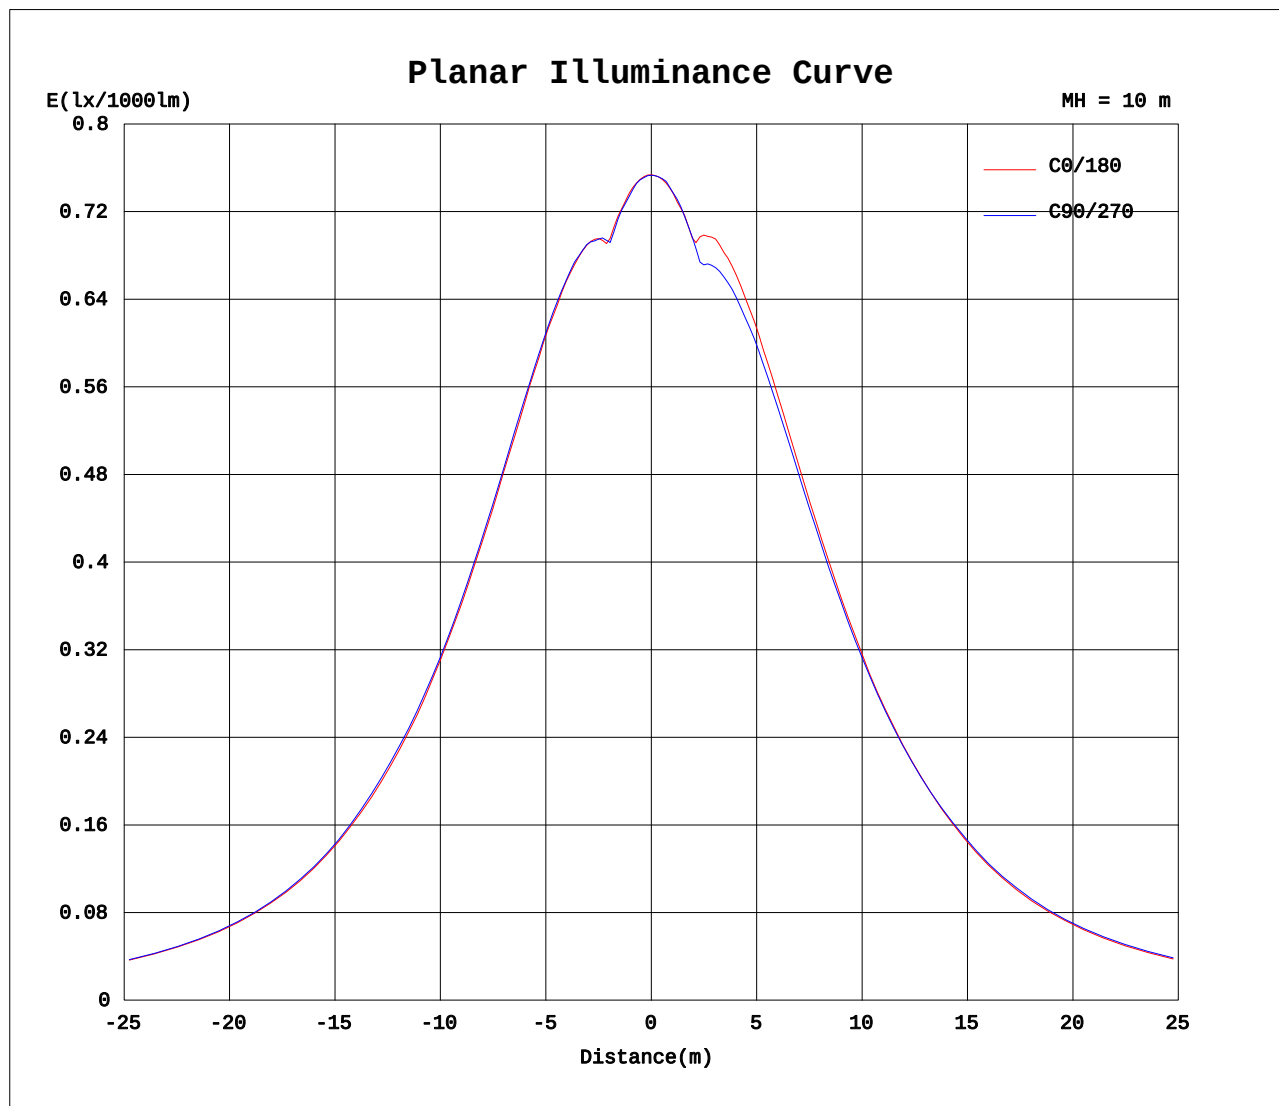

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.600m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.09V I:0.0357A P:7.4778W PF:0.9051 Freq:49.99Hz UTHDi:0.21% ITHDi:26.56% KDisp:0.9372 Lamp Flux:1000x1 lm		
NAME: WL153-8W-D-5700K	TYPE: 8W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.04624	Shielding Angle:

Table--1

UNIT: cd/klm

C (DEG) γ (DEG)	0	90	180	270															
0	75.4	75.3	75.4	75.3															
5	75.1	74.9	75.0	75.1															
10	73.9	73.5	74.0	73.9															
15	77.1	76.9	77.4	74.6															
20	80.9	81.2	81.6	78.9															
25	83.9	84.3	84.8	82.5															
30	86.3	86.7	87.3	85.4															
35	87.7	88.3	88.8	87.3															
40	88.3	89.0	89.6	88.2															
45	87.8	88.6	89.4	88.5															
50	86.5	87.8	88.1	87.8															
55	83.8	84.8	85.6	86.3															
60	79.0	79.9	80.9	82.2															
65	73.5	74.2	75.3	77.0															
70	67.6	68.1	69.3	71.3															
75	61.6	61.8	63.3	65.6															
80	56.4	57.2	57.8	60.2															
85	56.1	56.4	57.1	58.8															
90	55.5	55.1	56.2	58.1															
95	52.9	53.5	55.1	56.9															
100	46.9	38.5	44.1	40.9															
105	32.0	29.2	26.1	33.9															
110	29.0	21.4	22.7	24.5															
115	25.3	18.4	22.1	22.1															
120	22.0	21.1	31.0	24.2															
125	25.6	22.6	35.6	25.2															
130	27.0	17.6	31.4	22.1															
135	10.4	11.8	11.8	12.1															
140	1.17	5.87	1.18	4.60															
145	7.84	2.40	10.8	4.57															
150	15.4	0.97	15.4	1.06															
155	4.92	0.96	4.34	1.05															
160	0.87	0.95	0.87	0.90															
165	1.58	1.00	1.47	1.82															
170	0.92	0.92	0.89	0.88															
175	0.94	0.84	0.87	0.82															
180	0.82	0.81	0.83	0.81															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.600m [K=1.0000]
Remarks: