

**OT FIT 75/220–240/1400 CS L AP**

Constant Current LED Power Supply

1100mA - 1200mA - 1300mA- 1400mA




OPTOTRONIC® LED Power Supply is the reliable choice for linear and area fixtures for office - industrial - shop lighting

**Benefits**

Flexibility with 1 driver offers 4 output currents;  
High quality light with very low ripple;  
Enable slim fixture design with flat 21mm height metal housing  
Long lasting and high reliability  
Safety ensured by OSRAM (SELV)

**Applications**

Linear and area lighting  
Office – industrial - shop

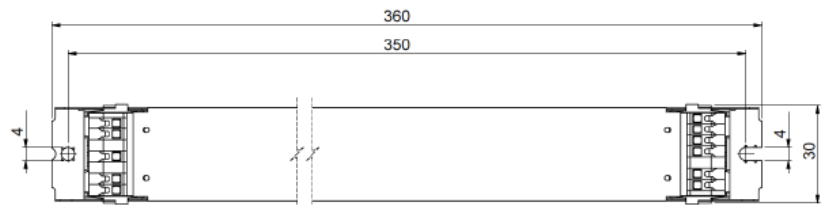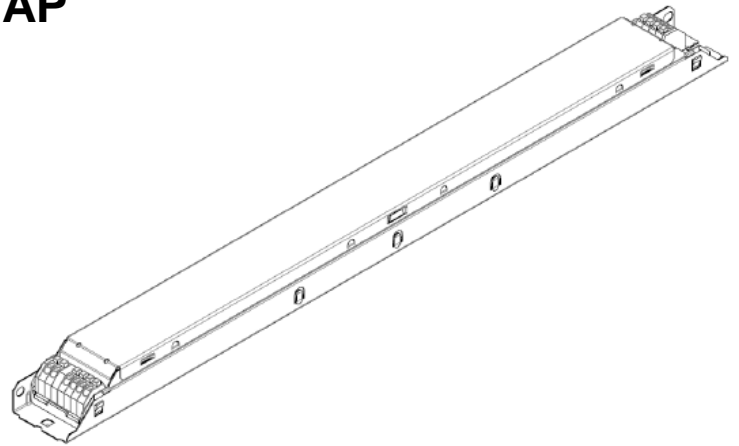

Housing material: metal, white painted.

Approval marks (under preparation if not on label)

**Product Features**

- Output current: 1100/200/1300/1400mA
- Output voltage : 27V<sub>DC</sub> – 54V<sub>DC</sub>
- Output power : 30W – 75.6W
- Input voltage: 220 – 240V<sub>AC</sub>
- Ambient temp range  $t_a$ : -20 to +50°C
- Low ripple, low THD
- Fixed output (i.e. no dimming)
- Typ. Efficiency : 87%
- SELV
- 50'000 hours lifetime

## Electrical Specifications

	Item	Value	Unit	Remarks
INPUT	Nominal voltage	220 – 240	V <sub>AC</sub>	
	Nominal frequency	50 - 60	Hz	
	AC voltage range	198 – 264	V <sub>AC</sub>	Permitted voltage range
	DC voltage range	NA	V	
	Maximum voltage	300	V	1hrs
	Nominal current	370	mA	230V, Refer to Table 1 for details
	Total Harmonic Distortion (THD)	< 10	%	Full load, 230 V, 50 Hz / see graphs
	Power factor	0.98		Full load, 230 V, 50 Hz / see graphs
	Efficiency	87	%	Full load, 230 V, 50 Hz, typical / see graphs
	Stand-by power	NA	W	
	Power loss	11	W	at 230V, Input power 85 W max. Refer to Table 1 for details
	Protection class	I		
	Inrush current	<16	A	t <sub>width</sub> = 100 μs typical (measured at 50% I <sub>peak</sub> )
	Max. units per circuit breaker	B16: 17; B10: 11		
Leakage current	< 0.7	mA	Output floating	
OUTPUT	Nominal voltage range	27 – 54	V <sub>DC</sub>	Refer to Table 1 for details
	Maximum voltage	60	V <sub>DC</sub>	Open circuit
	Nominal current range	1100/1200/1300/1400	mA	
	Current accuracy	+/- 7.5	%	
	Current ripple	< 5	%	Ripple / average @ 100 Hz
	Nominal power range	30 – 75.6	W	Partial Load. Refer to Table 1 for details
	Maximum power	75.6	W	T <sub>a</sub> =50°C, Refer to Table 1 for details
	Galvanic isolation	SELV		Output to mains - Touch current < 0.7 mA
DIMMING	Dimming control	No		Not dimmable
	Dimming range	NA	%	
	Dimming technique	NA		
	Frequency	NA	Hz	
	Galvanic isolation	NA		
ENVIRONMENT	Ambient temperature range t <sub>a</sub>	-20 ... +50	°C	Refer to Table 1 for details
	Maximum case temperature t <sub>c</sub>	80	°C	Measured on t <sub>c</sub> point indicated of the product label.
	Max. case temp. in fault condition	110	°C	
	Storage temperature range	-20 ... +80	°C	Cool down before operating
	Relative humidity	5 ... 85	%	Not condensing
	Surge transient protection	1   2	kV	L/N   LN/PE acc. IEC 61000-3-2 (ANSI C62.41 Cat.A ...)
	Environmental rating	Indoor		
	IP rating	IP 20		
	Mains switching cycles	> 100'000		
	Expected lifetime	50'000	hrs	t <sub>c</sub> = 80°C, 10% failure rate

### Protections

#### Over temperature

Automatic, reversible

#### Overload

Yes, non-reversible

#### No load

Yes, non-reversible

#### Short-circuit

Automatic, reversible

#### Input overvoltage

Maximum allowed input voltage 300V AC/ 1hr

#### Output overvoltage

Yes, Limitation of Output voltage < 60V

#### Output under voltage

NA

#### LED load protection

NA

### Wiring Diagram

Terminal:

Max. cable length - system:

Geometry (l x b x h):

Weight:

Push in terminals

2 m

360 x 30 x 21 mm


261g

Wire preparation:

Push in  
s: 0.5-1.5





f: 0.75-1.5

7-8 mm



Example with 1400mA LED module

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

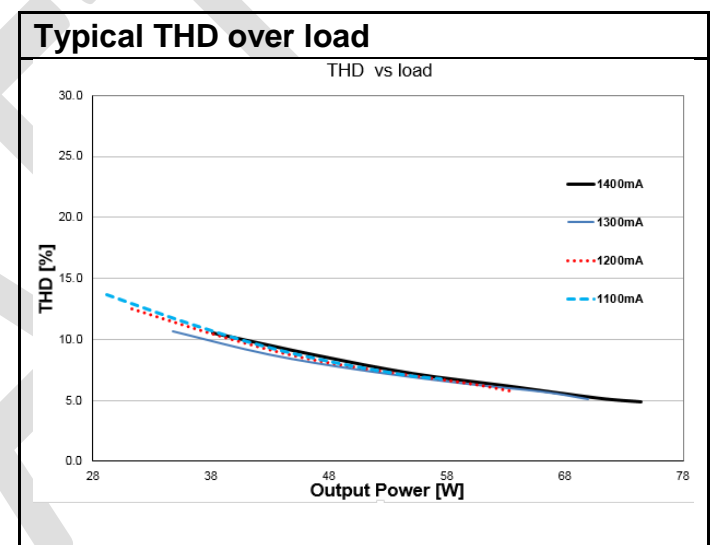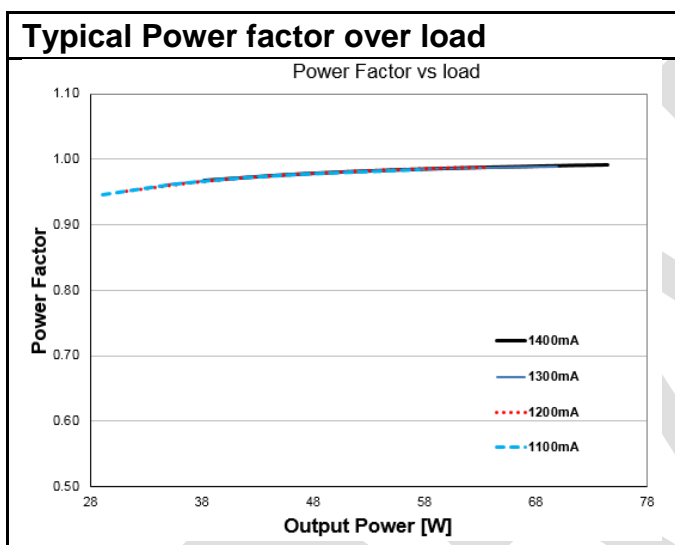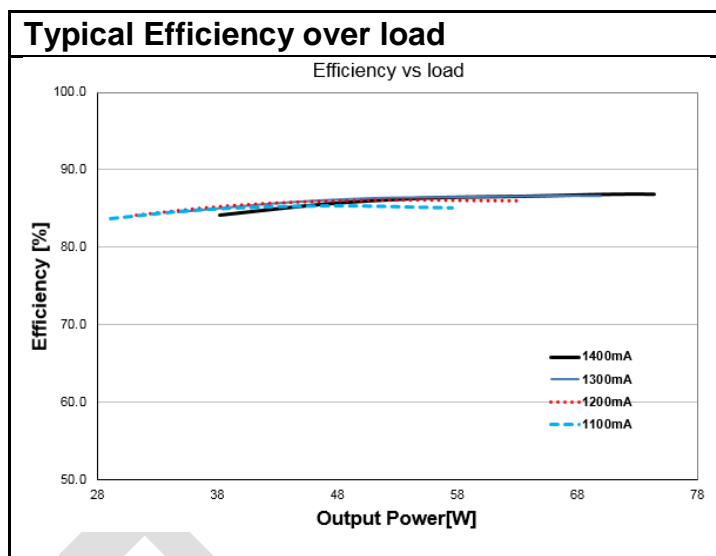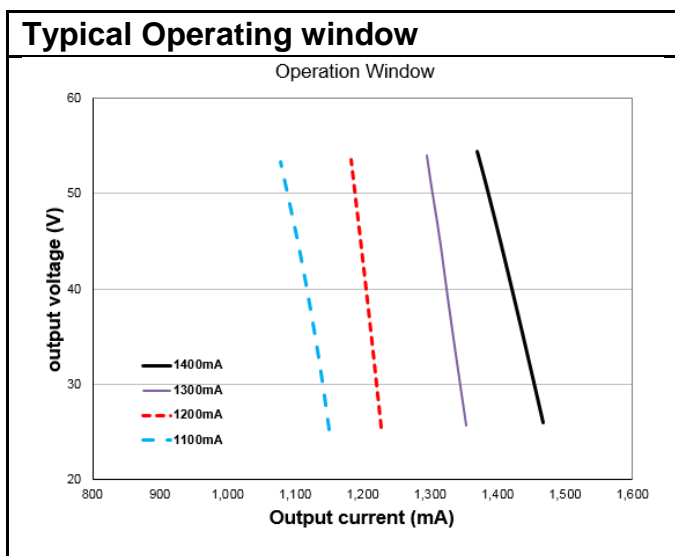

**Table 1 - Rated output power and current sets**

<b>I<sub>out</sub> (mA)</b>	<b>1100</b>	<b>1200</b>	<b>1300</b>	<b>1400</b>
<b>U min [V]</b>	27	27	27	27
<b>U max [V]</b>	54	54	54	54
<b>P min [W]</b>	29.7	32.4	35.1	37.8
<b>P max [W]</b>	59.4	64.8	70.2	75.6
<b>T<sub>a</sub> [°C]</b>	50	50	50	50
<b>T<sub>c</sub> [°C]</b>	80	80	80	80
<b>Line Current, nominal@230V mA</b>	300	330	360	370
<b>Max Power Loss@230V [W]</b>	10.0	10.3	10.7	11.0
<b>Input Power @230V [W]</b>	68	74	81	85

Pin1	Pin2	Current
ON	ON	1400
ON	OFF	1300
OFF	ON	1200
OFF	OFF	1100

Current selection by DIP-switch

**Standards**

Safety: IEC 61347-1, IEC 61347-2-13  
 Performance: IEC 62384  
 Harmonic content: IEC 61000-3-2  
 Immunity: IEC 61000-3-3  
 IEC 61547

Product name	EAN10	EAN40	Pieces / box
OT FIT 75/220–240/1400 CS L AP	TBD	TBD	20

**Manufacturer's address:**

**OSRAM GmbH**

Steinerne Furt 62 D-86167 Augsburg  
 Germany

[www.osram.com](http://www.osram.com)

**Technical support:**

Kunden Service Center Germany  
 +49 (0)89-6213-60 00

**Disclaimer (Engineering Samples)**

This product is a demonstration model from our development laboratories made available for your information only. The model is not binding in respect to its fitness for use, i.e. service life, luminous flux, color temperature and performance. Prior to production the design, including dimensions, is subject to modification. You will, therefore, appreciate that at this stage of development we are unable to assume any liability also for damages which may be caused by this product. Should you urgently require binding information for the preparation of construction data for your applications, please contact our marketing department.

