

Light is OSRAM

OSRAM

ELEMENT 8/220-240/200 LPF G3

Constant Current LED Power Supply 200mA

Element LED Power Supply fits in light fixtures for office, shop lighting or other indoor applications that require high quality of light

Benefits:


High compatibility with COBs and discrete LEDs;
High quality of light with ripple current < 5%
Safe and reliable
Safety ensured by OSRAM (SELV)
3 years guarantee

Applications

Downlights, Spotlights
Other Indoor LED luminaires

Approval marks

(Under preparation if not on the label)

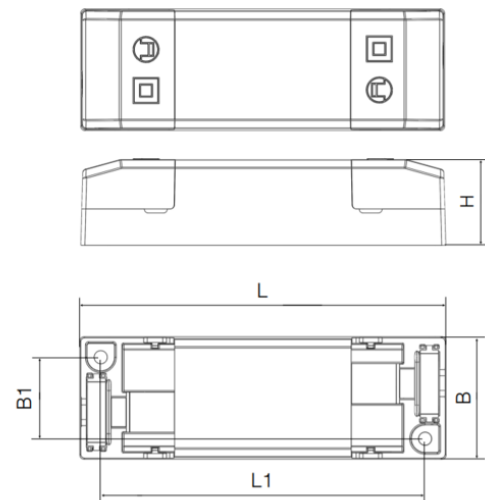

L	90mm
L1	79.7mm
B	30mm
B1	20mm
H	21mm

Product Features

- Output currents: 200mA
- Output voltage: 27V_{DC} – 42V_{DC}
- Output power: 5.4W – 8.4W
- Input voltage : 220 – 240 V_{AC}
- Suitable for class I and II luminaires
- 30'000 h lifetime
- Fixed Output (i.e. no dimming)
- Typ. Efficiency: 80%
- SELV
- Ambient temp range, ta: -20°C to +50°

Electrical Specifications

	Item	Value	Unit	Remarks
Input	Nominal Voltage	220 – 240	Vac	
	Nominal frequency	50/60	Hz	
	AC voltage range	198 – 264	Vac	Permitted voltage range
	DC voltage range	NA	V	
	Maximum voltage	300	V	2hrs
	Nominal current	85	mA	230V
	Total Harmonic Distortion (THD)	NA	%	
	Power factor	0.55		Full load, 230 V, 50 Hz / see graphs
	Efficiency	80	%	Full load, 230 V, 50 Hz, typical / see graphs
	No-load power	n/a	W	Load switching on output side is not permitted
	Power loss	2.1	W	@230V, Input power 10.5W max.
	Protection class	I/II		Suitable for class I and class II luminaires
	Inrush current	TBD	A	$t_{width} = 100 \mu s$ typical (measured at 50% Ipeak)
	Max. units per circuit breaker	B10: TBD B16: TBD C10: TBD C16: TBD		
Leakage current	< 0.7	mA	Output floating	
Output	Nominal voltage range	27 – 42	V _{DC}	
	Maximum voltage	60	V _{DC}	Open circuit
	Nominal current range	200	mA	
	Current accuracy	± 10 %		
	Current ripple	< 5%		Ripple / average @ 100 Hz
	Pst LM	≤ 1		
	SVM	≤ 0.4		
	Nominal power range	5.4 – 8.4	W	Partial Load.
	Maximum power	8.4	W	Ta ≤ 50°C
	Galvanic isolation	SELV		3, 75 kVrms. Output to mains - Touch current < 0.7 mA
Dim	Dimming control	No		Non dimmable
	Dimming range	NA	%	
	Dimming technique	NA		
	Frequency	NA	Hz	
	Galvanic isolation	NA		
Environment	Ambient temperature range ta	-20 ...+50	°C	
	Max. case temperature tc max	TBD	°C	Measured on tc point indicated on the product label.
	Max. case temp. in fault condition	110	°C	
	Storage temperature range	-40 ...+85	°C	Cool down before operating
	Relative humidity	5 ... 95	%	Not condensing
	Surge transient protection	1 2	kV	L/N LN/PE acc. IEC 61547 Clause 5.7
	Environmental rating	Indoor		
	IP rating	IP 20		
	Mains switching cycles	> 100'000		
Expected lifetime	30'000 50'000	hrs	@tcmax = TBD°C, max. 10% failure rate @tcmax = TBD°C, max. 10% failure rate	

Protection

Overload

Automatic, reversible

No load

Automatic, reversible

Short-circuit

Automatic, reversible

Input overvoltage

Maximum allowed input voltage 300V AC/ 2hr

Output overvoltage

Yes, limitation of Output voltage < 60V

Output under voltage

NA

Wiring Diagram

Terminal:

Push in terminals

Max. cable length

TBD

Weight:

TBD

For build-in: 0.5-1.5 mm², for independent: 0.75-1.5 mm²

Wire preparation:

Push in

s:0.5-1.5

f:0.75-1.5



7-8 mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs

Typical Operating window

Typical Efficiency Vs load

Typical Power factor Vs load

Typical THD Vs load

Standards

Safety: IEC 61347-1, IEC 61347-2-13

Performance: IEC 62384

Harmonic content: IEC 61000-3-2

Immunity: IEC 61547

IEC 61000-3-3

EAN10	Product name	Units/ box
TBD	ELEMENT 8/220...240/200 LPF G3	50

[OSRAM GmbH](#)

Head office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
www.osram.com

The OSRAM logo is displayed in a bold, orange, sans-serif font.