



Lighting Measure Report

Color Parameter

Chroma Coordinate: $x=0.3148$ $y=0.3307$ $u=0.1987$ $v=0.313$ $Duv=0.0031$

Chroma Coordinate: $u'=0.1987$ $v'=0.4695$

CCT.: CCT=6379K Dominant: $d=489.9\text{nm}$ Barycenter: $b=540\text{nm}$ Peak Wavelength: $p=447.3\text{nm}$

FWHM: 23.16nm Purity: $Pe=6.432\%$ Red Ratio: $R=0.135$ Green Ratio: $G=0.816$ Blue Ratio: $B=0.05$

Color CRI.: $Ra=81.97$

R 1=81 R 2=85 R 3=87 R 4=84 R 5=82 R 6=79 R 7=87

R 8=71 R 9=7 R 10=62 R 11=84 R 12=61 R 13=81 R 14=93

R 15=76

Luminosity Parameter

Luminous Flux(380-780nm): 3165.48lm Optical Power(380-780nm): 10.18W Efficient(380-780nm): 82.89lm/W


Electric Parameter

Voltage: $U=220.6\text{V}$ Current: $I=179\text{mA}$ Power: $P=38.19\text{W}$ PF: $PF=0.965$


Device State

Wavelength Range: $380\text{nm}-780\text{nm}$ Wavelength Interval: 1nm

SDCM: 1.809

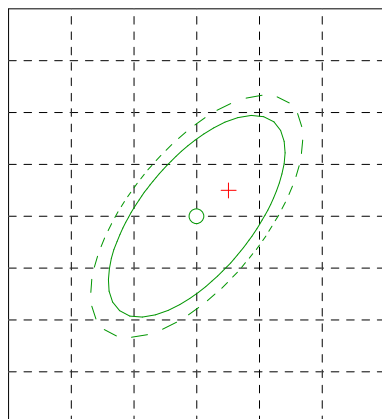

$x=0.3123$ $y=0.3282$ ANSI-C78-377/6500K

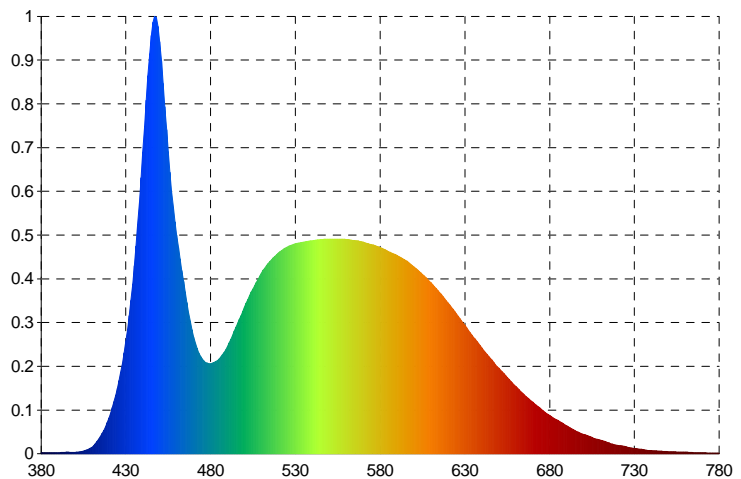

Product Model: 217B-40W-6000K-1

Sample No.: 1

Test Cond: $Tg=24.2\text{Cels}$ $Ta=24.6\text{Cels}$ $RH=60\%$

Test Date: 2024-5-21

Manufacturer: GGL

Product Category: LED

Measure Device: Volnic X-10 Series CCD Spectrum System

Operator(Sign): _____