رفيد rafeed
بريميوم سيريس PREMIUM SERIES

للخبرة المثالية زيارة موقعنا على الإنترنت
For an optimal experience visit website www.atclighting.co

©2012 Arabic Technology Company for lighting Dubai UAE
العلامات التجارية هي ملكية خاصة لشركة التكنولوجيا العربية للإنارة أو إلى أصحابها.
Trademarks are the property of Arabic Technology Company or their respective owners.

AtcLighting Rafeedlighting www.rafeed.co

رفيد rafeed
بريميوم سيريس PREMIUM SERIES

Offices & Healthcare
Lighting Solutions

2024-2025

رفيد rafeed
بريميوم سيريس PREMIUM SERIES

Offices and Healthcare

Content

About Us	06
Our Partners	14
Panel Light Series	16
Downlight Series	48
Linear Light Series	68
Batten Light Series	110
Exit Sign Series	116
Floor Lamp Light Series	124
Index	137

“Darkness cannot drive out darkness, only light can do that. “

Martin Luther King

About Us

Rafeed provides the best and newest technology in LED lighting, and consultancy services with the application process for all Rafeed products, creativity and honesty lead to unique wide-range products.

We are proud to have pioneered the application of LED technology in industry. Our expertise has grown from there. Today we offer next-generation lighting solutions and other visual products using LED's. As scientists believe that LED lighting has the potential to reduce lighting energy use in the world by one-fourth. With the promise of being more than ten times as efficient as incandescent lighting, light-emitting diodes (LEDs) will change the way we light our homes and business. We believe that LED lighting has the potential to revolutionize the lighting market through the introduction of highly energy efficient, longer lasting and versatile light sources.

Lighting For OFFICES

Quality, flexibility and efficiency are the key features of RAFEED lighting solutions for offices. The standard-compliant and glare-free illumination of rooms and individual workstations supports concentrated and fatigue-free work in the long run. If activities change, then lighting conditions can be rapidly modified to the new requirements.

TO PLAY
TO WORK
WAY OUT

Lighting For HEALTHCARE

While light ensures clarity in treatment areas and in laboratories, for example, when it comes to patients and staff it should primarily promote a sense of wellbeing. It is also important to strike this balance optimally in doctors' offices. Together , we identify the specific requirements in your situation and thus create ideal working and healing conditions.

Lighting For EDUCATION

A well-planned learning environment increases the student's opportunities to benefit from education. With our lighting control package, light can be adapted to different learning activities and facilitate the cognitive process. That it also saves energy and is easy to use is a bonus in this context. Smart, sustainable and for the long-term.

Our Partners

We offer flexible combination of high quality LED chips and drivers for all lighting fixtures with five years warranty.

LED and Driver Brands

TRIDONIC CREE SAMSUNG PHILIPS

LUMILEDS NICHIA OSRAM MEAN WELL

PRODUCTS

Panel

Light Series

INNOVATE
CREATE
DESIGN
BUILD
TEAM

Zia Series

ZIA LED Panel Light with **Recessed** and **Surface** options.

زِيـــا

High-end design

Aluminum alloy housing and PC diffuser, durable and environment friendly matt aluminum color finish.

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-AUR40-01	40 w/4400 lm	595x595x35mm	White	80	3000k 4000k 6500K	Aluminum + PMMA	90°

Zia Series

Features

- Edge led panel light with slim and elegant design
- 3000~6500 CCT correlated color temperature, high efficiency can reach to 110 lm/w.
- Easy installation and maintenance

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Pendant

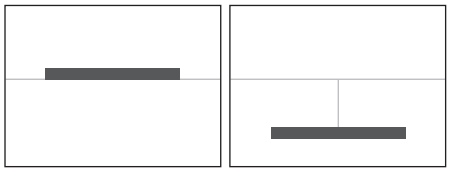

زِيـــا

Specifications

IP44

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-ZIA40-01	40 w/4400 lm	595x595x9mm	White	80	3000K 4000K 5000K 6500K	Aluminum + PC	120°
PR-PL-ZIA40-02	40 w/4400 lm	1195x295x9mm					
PR-PL-ZIA72-03	72 w/7920 lm	1195x595x9mm					

Product size

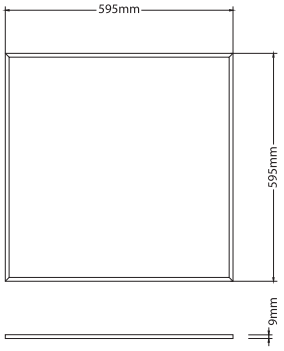

PR-PL-ZIA40-01

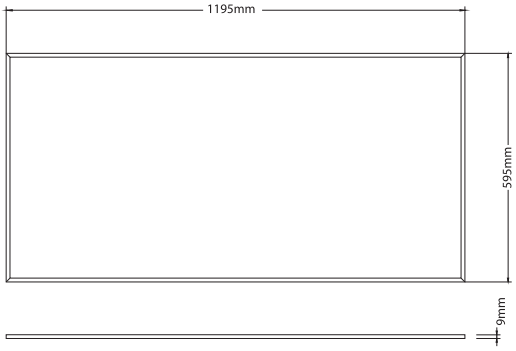

PR-PL-ZIA72-03

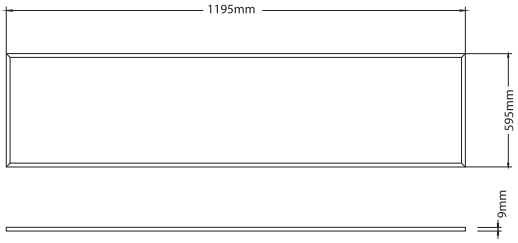

PR-PL-ZIA40-02

Photometric



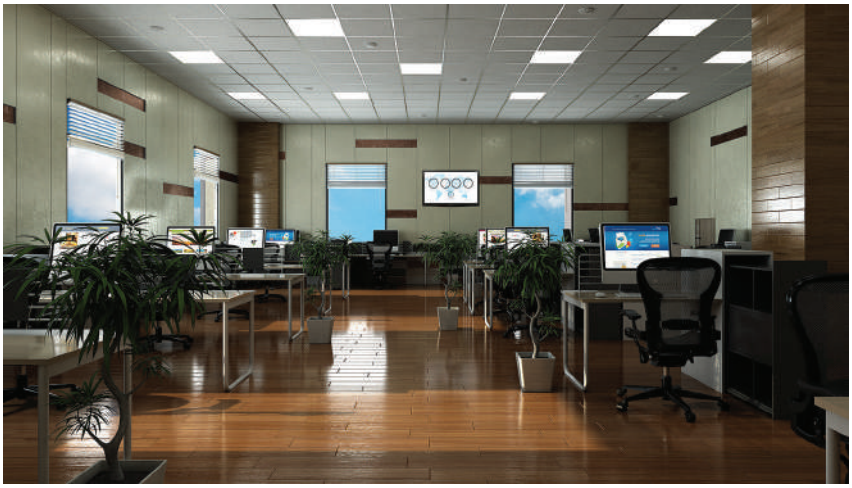

Zia Series

Features

- Edge led panel light with slim and elegant design
- 3000~6500 CCT correlated color temperature, high efficiency can reach to 110 lm/w.
- Easy installation and maintenance

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Surface



زِيـــا

Specifications

IP44

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-ZIA72-04	72 w/7920 lm	1195x595x32 mm	White	80	3000K 4000K 5000K 6500K	Aluminum + PC	120°
PR-PL-ZIA40-05	40 w/4400 lm	595x595x32mm					
PR-PL-ZIA40-06	40 w/4400 lm	1195x295x32mm					

Product size



PR-PL-ZIA40-05

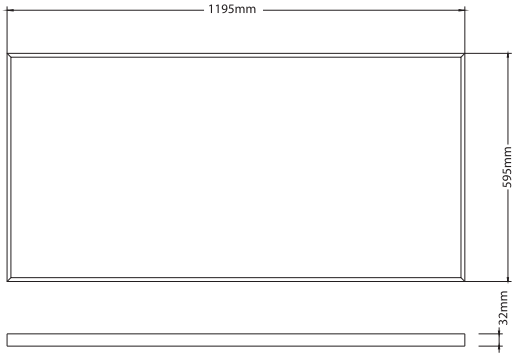

PR-PL-ZIA72-04

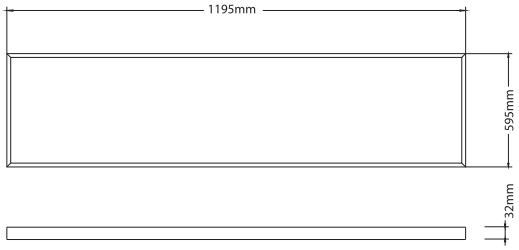

PR-PL-ZIA40-06

Photometric



Sama Series

Features

- Sama panel light front and back IP65 (Protection factor make this surface panel resistant to both dust and water)
- High light output can reach more than 100lm/w.
- Ideal for wet applications.

- Application : Office, Basement lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface

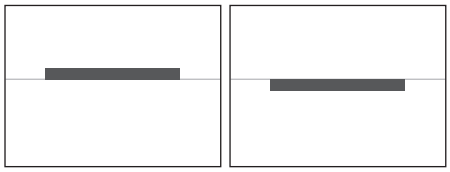

سَمـا

Specifications

IP65

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-SAM40-01	40 w/4400 lm	595x595x32mm	White	80	3000k 4000k 6500K	Aluminum + PMMA	120°
PR-PL-SAM50-01	50 w/6000 lm	595x595x32mm					

Product size

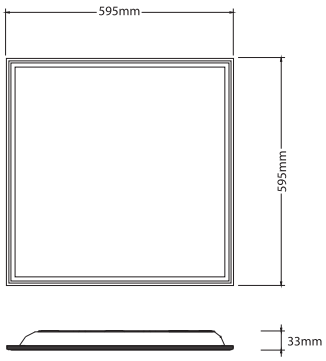

PR-PL-SAM40-01
PR-PL-SAM50-01

Photometric



Aura Series

AURA LED panel light was designed specifically for hospitals and offices where glare control is a high priority.

أورا

Aura Series

Features

- Utilizes the latest Pyramid Optics for excellent light control.
- Durable and environment friend Aluminum alloy housing, PC reflector and PMMA diffuser.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

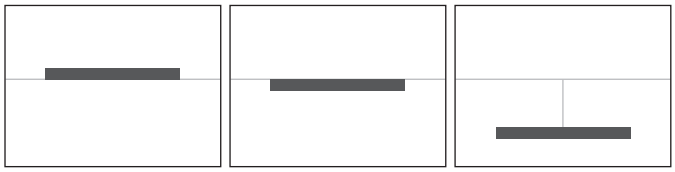

أورا

Product size

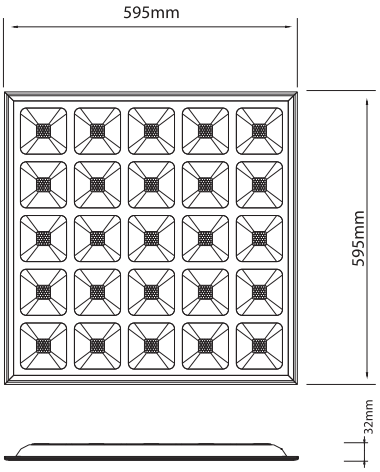

Photometric



Dana Series

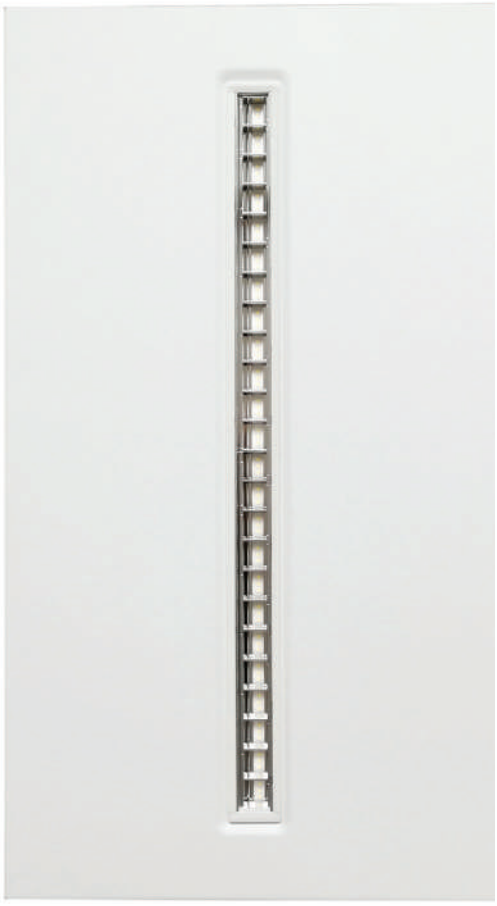

Dana represents a high-quality lighting solution for office buildings, It provides maximum efficiency and a uniform illumination every where.
It's perfect for areas, where you need maximum flexibility of space arrangement or when the final layout is not yet known.

دانـــا

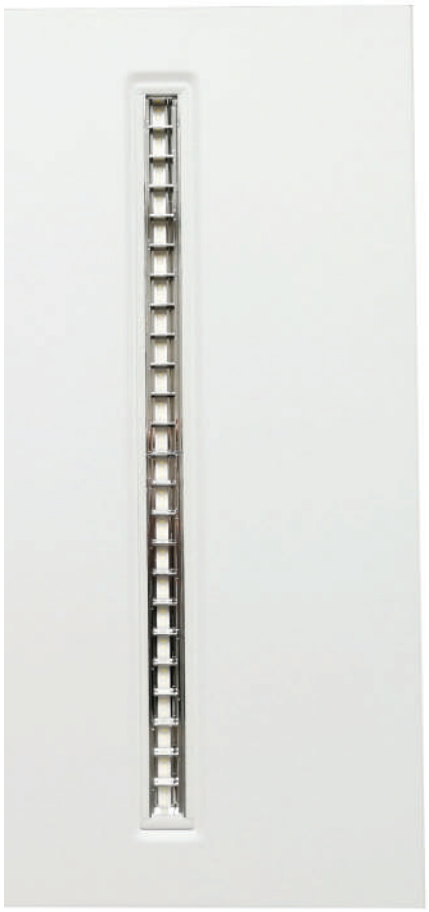

The universal luminaire body can be installed in plasterboard or modular ceilings
Ensuring the best match with the **interior space design.**

High-quality lighting solutions that provide maximum efficiency and a uniform illumination
Everywhere. It's a perfect fit for everybody that doesn't know the position of the furniture
But still needs an even illumination of the entire space.

Dana Series

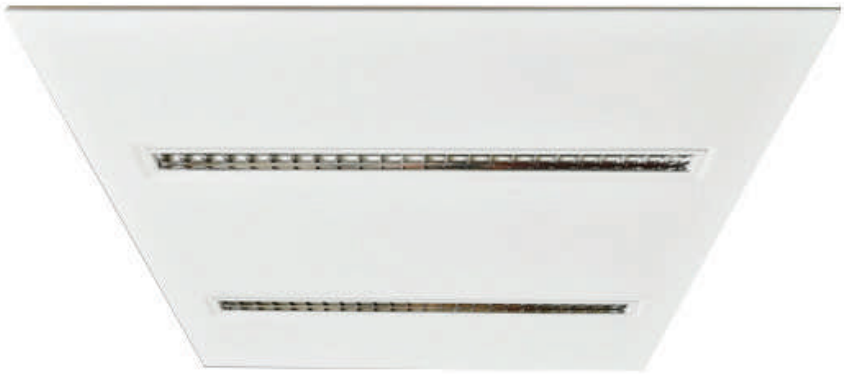

Features

- This led panel light adopts grill optical design.
  Low UGR helps offer the most comfortable lighting environment.
- Modular design is suitable for different size of light body and ceiling grid.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital
  School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

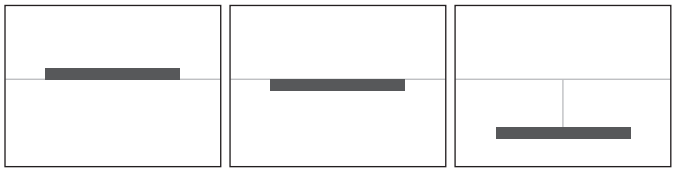

دانـــا

Specifications

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-DAN40-01	40 w/4000 lm	595x595x22.4mm	White	83	2700k ~ 6500k	Aluminum +PC	85°
PR-PL-DAN40-02	40 w/4000 lm	620x620x22.4mm					
PR-PL-DAN40-03	40 w/4000 lm	1195x295x22.4mm					
PR-PL-DAN60-04	60 w/6000 lm	1195x595x22.4mm					

Product size

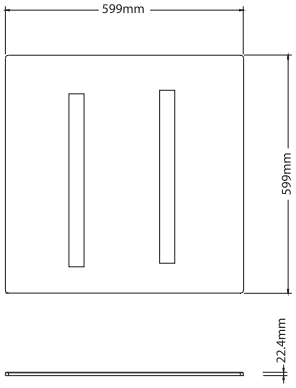

PR-PL-DAN40-01

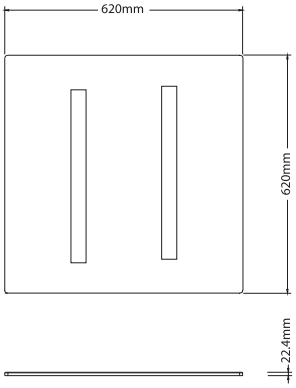

PR-PL-DAN40-02

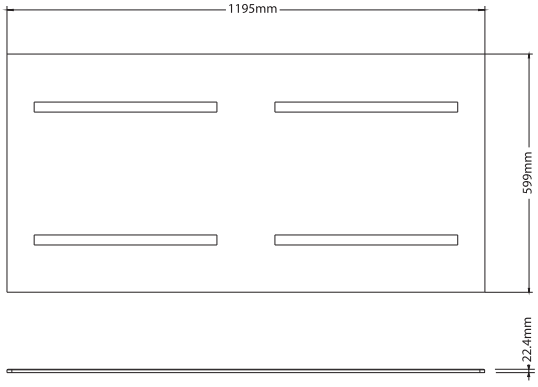

PR-PL-DAN60-04

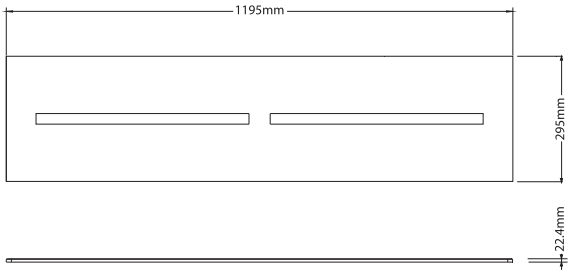

PR-PL-DAN40-03

Photometric



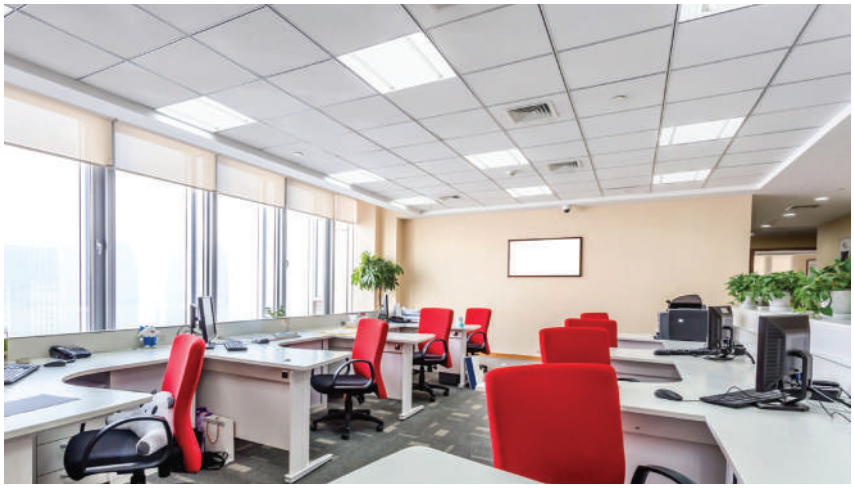

Sadan Series

Features

- Sadan series are LED retrofit replacements alternative for fluorescent indoor fixture.
- Advanced light distribution and attractive appearance, deliver unprecedented energy Savings and offer the most advanced luminaire for general-ambient lighting applications.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

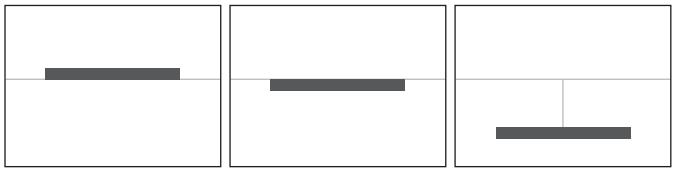

سـدن

Specifications

IP20 RoHS

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-SAD36-01	36 w/4000 lm	595x595x40mm	White	80	3000k 4000k 6000K	Aluminum + PC	120°
PR-PL-SAD36-02	36 w/4000 lm	1195x295x40mm					
PR-PL-SAD60-03	60 w/6000 lm	1195x595x40mm					

Product size

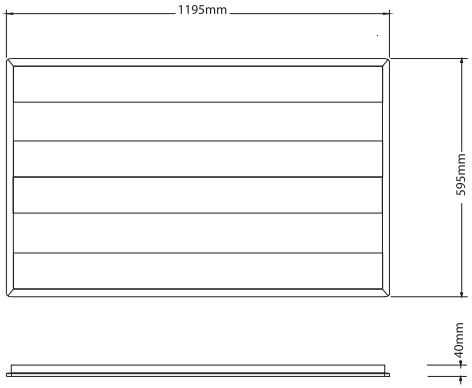

PR-PL-SAD60-03

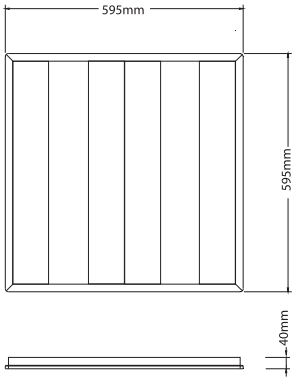

PR-PL-SAD36-01

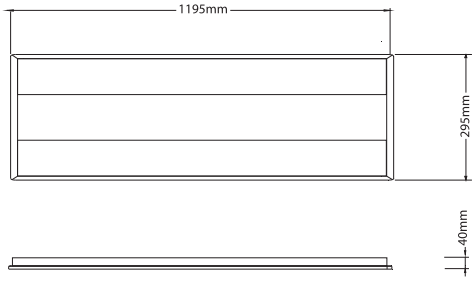

PR-PL-SAD36-02

Photometric



Tulip Series

The contemporary **center lens design** delivers a soft natural glow with even illumination and minimized glare making it an attractive general-purpose ambient lighting solution.

Durable steel construction with white powder coat finish.

تـوليــب

Advanced optical design generates even light distribution with optimal uniformity providing glare-free illumination.

More than **100** lm/w, pass **UL** and **DLC** certificate.

Tulip Series

Features

- Uniform and soft light, advanced reformative optics delivers greater distribution and uniformity.
- Low Brightness Eliminates "Pixilation".
- Up to 50% energy saving compared with fluorescent troffer.
- Lighting source module design, easy installation and maintenance.
- Superior Thermal Management Reduces Heat Sink Size.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface

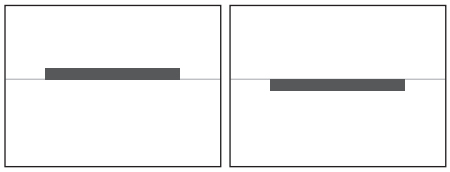

تـوليــب

Specifications

IP20 RoHS

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-TUL40-01	40 w/4000 lm	595x595x70mm	White	80	3000k 4000k 6000k	Steel + PMMA	110°
PR-PL-TUL40-02	40 w/4000 lm	1195x295x70mm					
PR-PL-TUL55-03	55 w/5500 lm	1195x595x70mm					

Product size

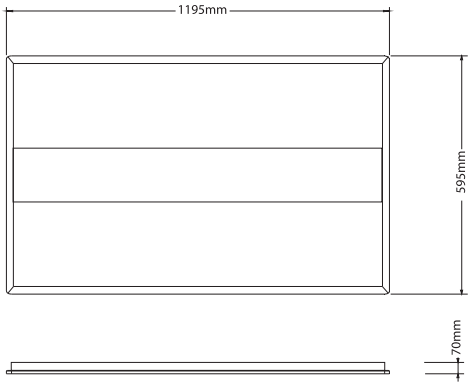

PR-PL-TUL60-03

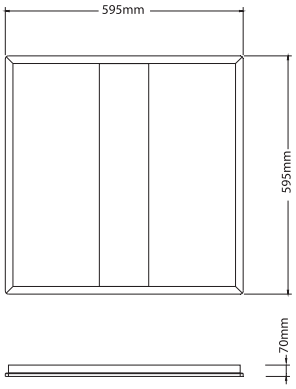

PR-PL-TUL36-01

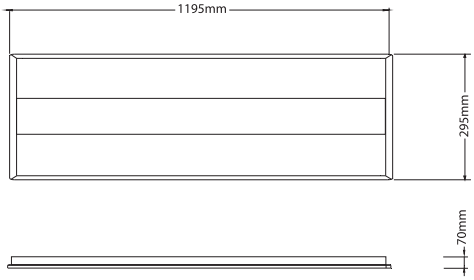

PR-PL-TUL36-02

Photometric



Alex Series

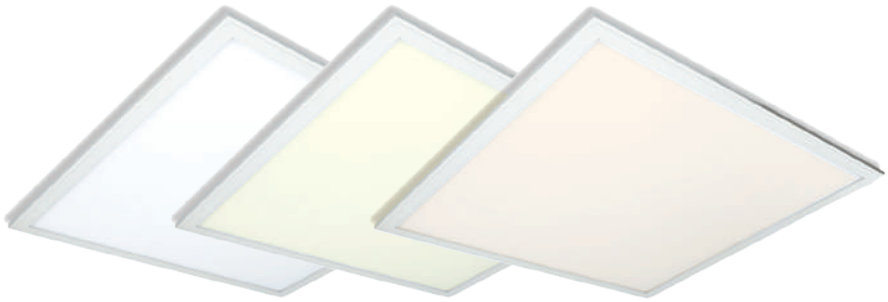

Features

- CCT adjustable panel with remote/dip switch/0-10V controlling.
- More choice for user and good to your warehouse to reduce SKU.
- Completely homogeneous illumination creates a feel-good atmosphere for workstations
- Installation is even simpler and almost 50% quicker.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

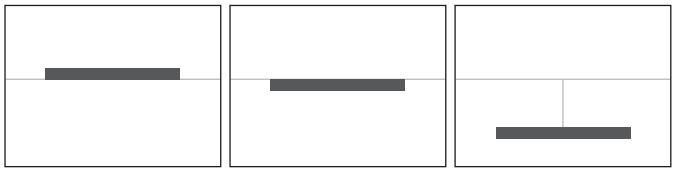

آلیـکس

Specifications

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-ALE38-01	38 w/3800 lm	596x596x11mm	White	80	Tunable White	Aluminum + PC	120°
PR-PL-ALE38-02	38 w/3800 lm	1196x296x11mm					
PR-PL-ALE38-03	38 w/3800 lm	1196x596x11mm					

Product size

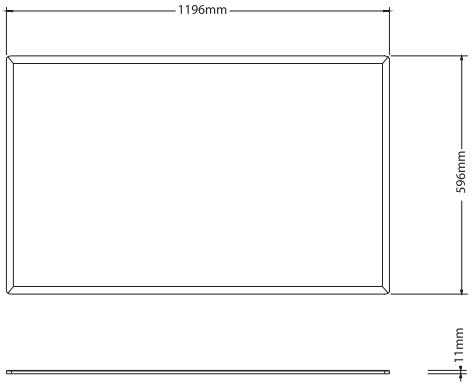

PR-PL-ALE38-03

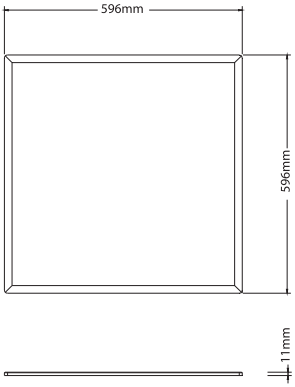

PR-PL-ALE38-01

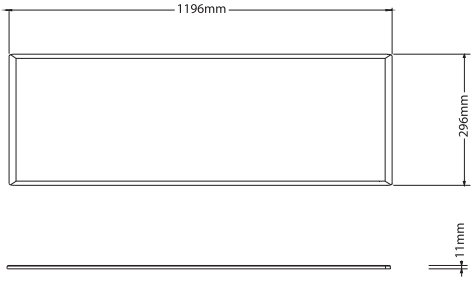

PR-PL-ALE38-02

Photometric



Anmar Series

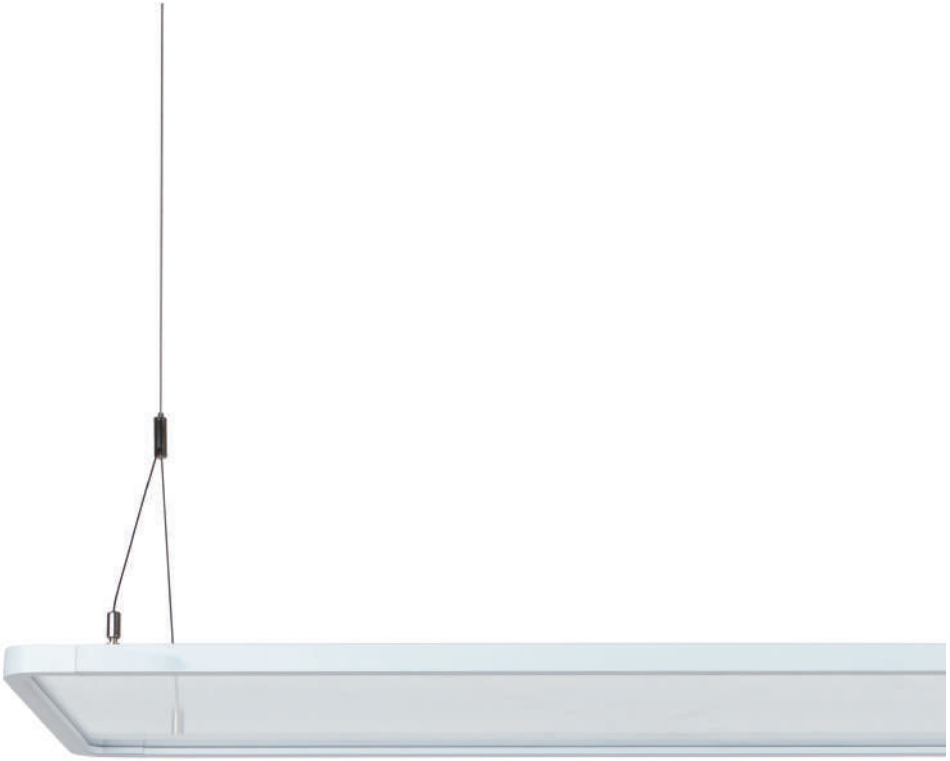

ANMAR Intelligent Transparency Indirect/Direct

Optional glare control and uniform illumination.
DALI, 0-10V dimming, CCT Tunable.

Available in Multi colors.

◯ White ◯ Silver ● Black

أنمـــار

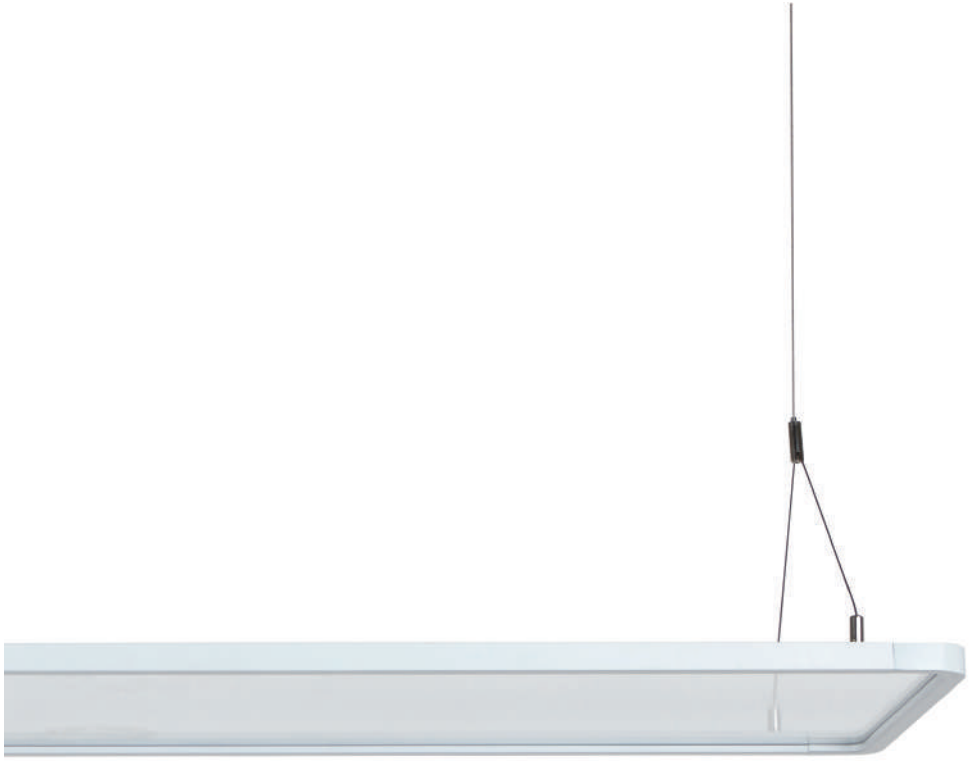

Illusion of zero Gravity

The pendant LED luminaire Transarency seems to be made of two states: when off there is just a18mm visible slim frame and a transparent panel, turned on it becomes a light statement in the room, minimalist and clear-cut.

Pure Architecture

The transparent nature of the material allows the creation of a light and transparent architecture. Since the luminaire does not superimpose the language of architecture, interiors retain thier orginally planned autonomy,When switched on, the luminaire allows spaces to be delibertely re-interpreted.

Anmar Series

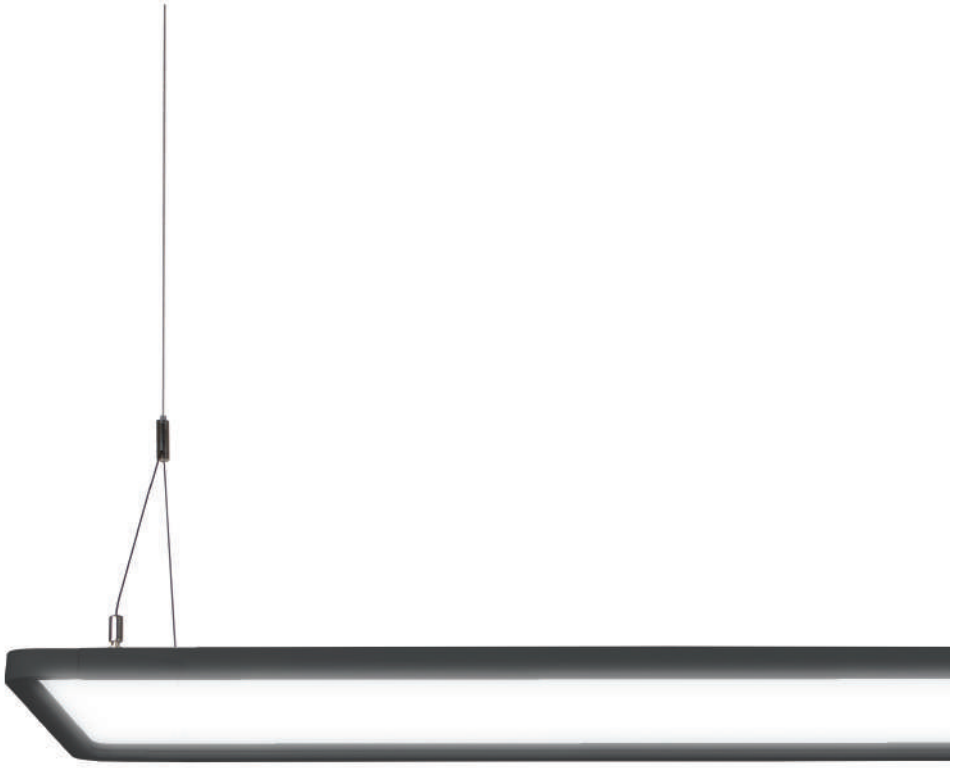

Ultra slim Aesthetic design

Ultra-slim and streamlined appearance makes the floating square luminaire highly meets the aesthetic indoor lighting design.

Transparent LGP and round corners could also anhance the spatial experience.

Available in two shape

Round corner, straight corner.

أنمـــار

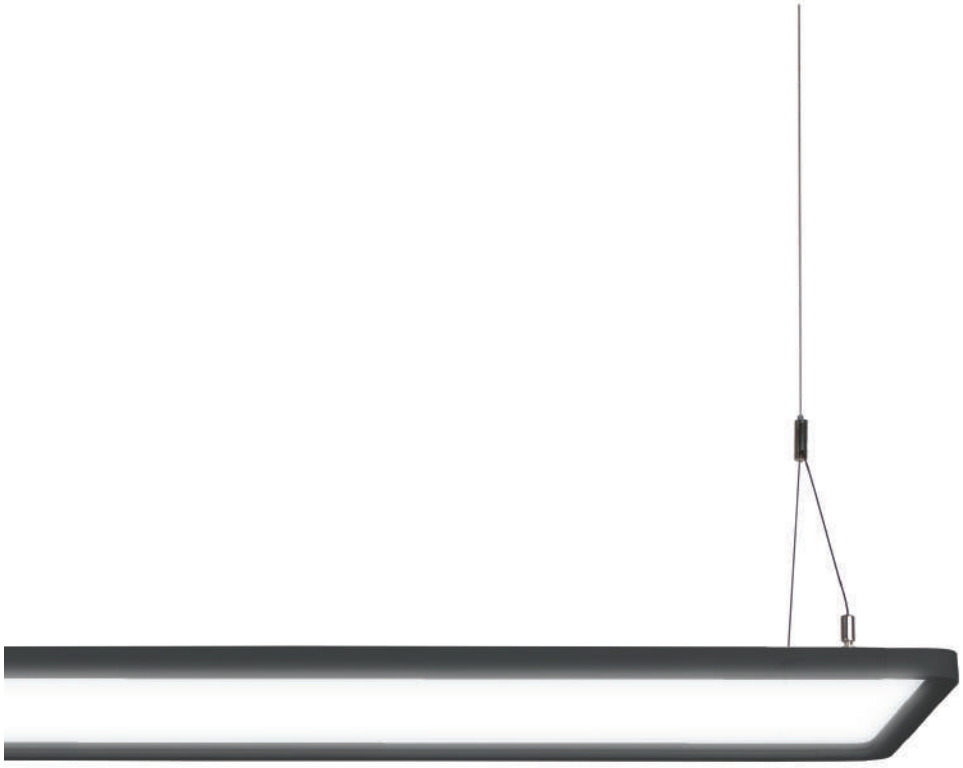

Glare-free up to 120lm/w

Uniform Light ; Optimal Light Distribution

with both direct and indirect light distribution, the luminaire could creats a pleasant ambience. the adjustable light distribution ratio makes it satisfy the various demands of modern office lighting.

Anmar Series

Features

- Intelligent Transparency Indirect/Direct (40% uplight 2400lm and 60% downlight 3600lm).
- Elegant design efficiency of more than 120lm/w.
- Optimal glare control.
- Uniform illumination, direct and indirect light.

- Application: Reception and open areas for offices, Education, High-End Restaurant, ...etc.

Installation

Pendant



أنمـــار

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-ANM50-01	50 w/5500 lm	1200x300x18mm	White Silver Black	80 90	3000k 4000k 5000K	Aluminum + PMMA	110°
PR-PL-ANM50-02	50 w/5500 lm	1195x295x25mm					

Product size

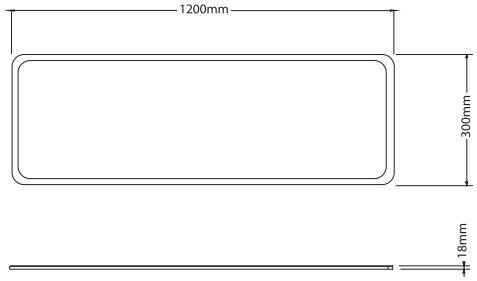

PR-PL-ANM50-01

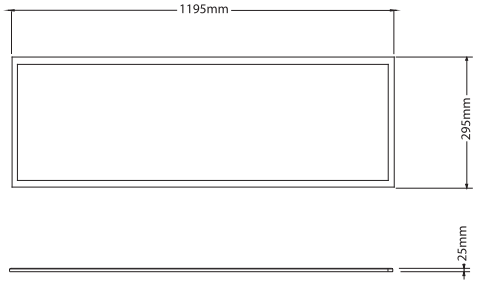

PR-PL-ANM50-02

Photometric



Mavi Series

Slimmer design, great lighting quality and high efficiency
Are what characterize **Mavi** Panel light

ماڤي

Classic yet-contemporary design
made of high quality materials with great slim elegant design
to suit all types of applications and to provide the best lighting effect you need
for your space .

Mavi Series

Features

- Slim and elegant design
- Designed with high quality materials and high efficiency reaches to 120 lm/w.
- Provides uniform light edge-to-edge with high ingress protection reaches to IP54

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

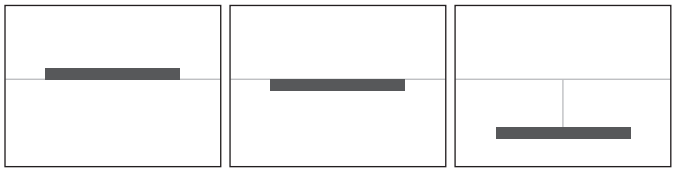

ماڤي

Specifications

IP40 IP54 IP65

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-PL-MAV40-01	40 w/4800 lm	595x595x10mm	White	80	3000K 4000K 6000K	Aluminum+PMMA + PS	120°
PR-PL-MAV40-02	40 w/4800 lm	1295x295x10mm					
PR-PL-MAV50-03	50 w/6000 lm	1195x595x10mm					
PR-PL-MAV40-04	40 w/4800 lm	1195x145x10mm					
PR-PL-MAV40-05	40 w/4800 lm	1495x145x10mm					

Product size



PR-PL-MAV40-01

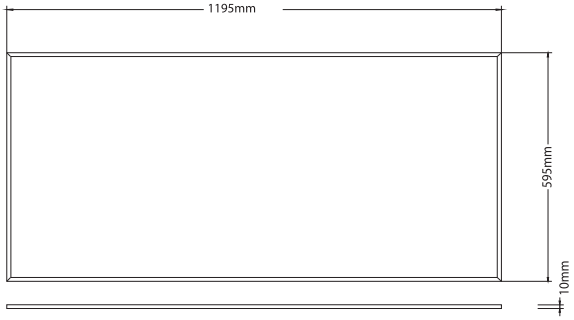

PR-PL-MAV50-03

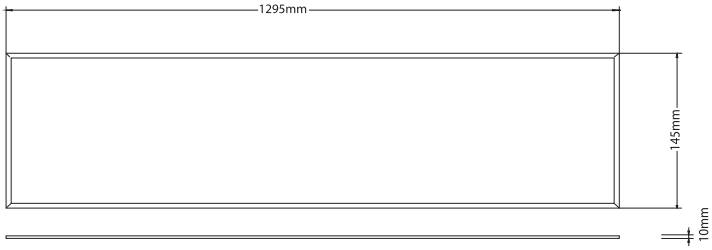

PR-PL-MAV40-02

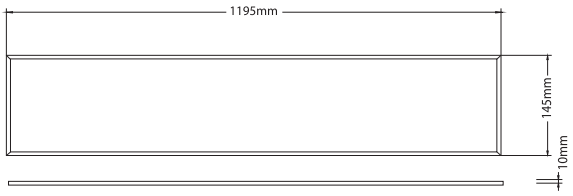

PR-PL-MAV40-04

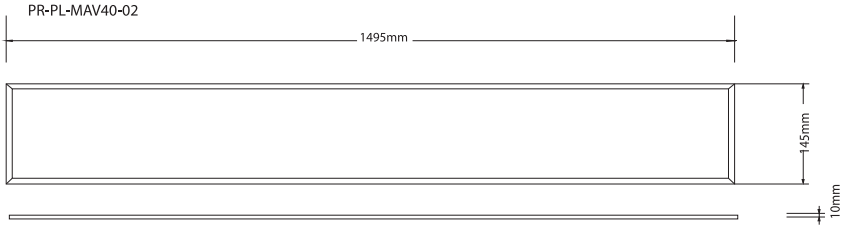

PR-PL-MAV40-05

Photometric



Down

Light Series

Rossana Series

With its minimal shape, **Rossana** responds to your needs for great illumination.
The soft edge design allows you to reach a high visual comfort and low glare by making a soft transition of the light on the frame.

IIt is an extremely functional luminaire, more than perfect for those who want something simple and smart. Its design has nothing more to add nor nothing left to take away.

روشـانـا

Available
In round and square shape

Rossana Series

Features

- SMD LED Deep anti-glare downlight adopts high lumen, PC diffuser and high-quality driver.
- Triac Dimmable, 1-10V Dimmable and DALI version share great popularity by excellent dimming effect.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



روشـانـا

Specifications

IP20 | RoHS | LONG lifespan

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-ROS9-01	9 w/765 lm	Ø119xH50mm	White	80	3000K 4000K 6000K	Aluminum + PC	120°
PR-DL-ROS15-02	15 w/1350 lm	Ø154xH50mm					
PR-DL-ROS20-03	20 w/1800 lm	Ø174xH50mm					

Product size

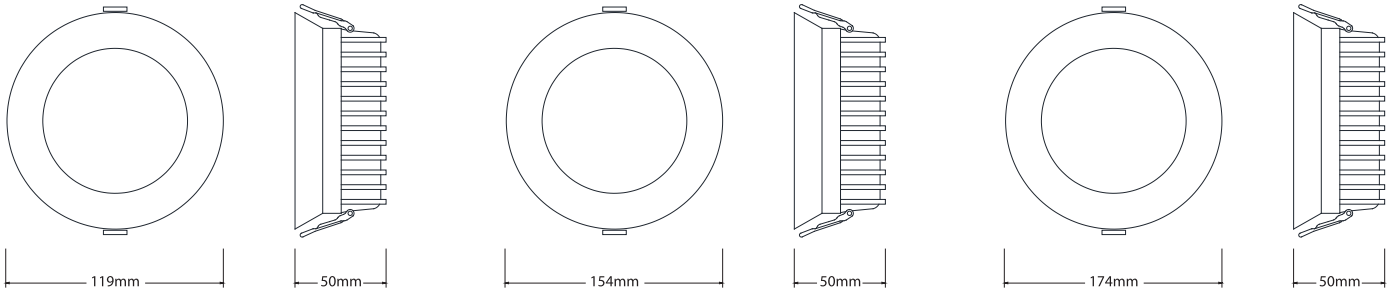

PR-DL-ROS9-01

PR-DL-ROS15-02

PR-DL-ROS20-03

Photometric



Rossana Series

Features

- SMD LED Deep anti-glare downlight adopts high lumen, PC diffuser and high-quality driver.
- Triac Dimmable, 1-10V Dimmable and DALI version share great popularity by excellent dimming effect.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



روشـانـا

Specifications

IP20 RoHS

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-ROS9-04	9 w/765 lm	L110xW110xH50mm	White	80	3000K 4000K 6000K	Aluminum + PC	120°
PR-DL-ROS15-05	15 w/1350 lm	L145xW145xH50mm					
PR-DL-ROS20-06	20 w/1800 lm	L170xW170xH50mm					

Product size

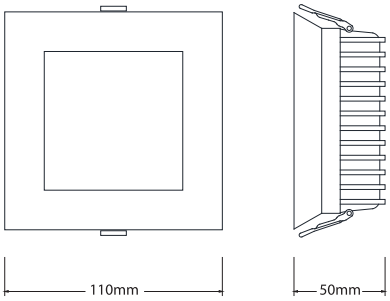

PR-DL-ROS9-04

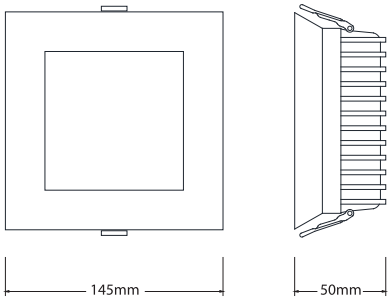

PR-DL-ROS15-05

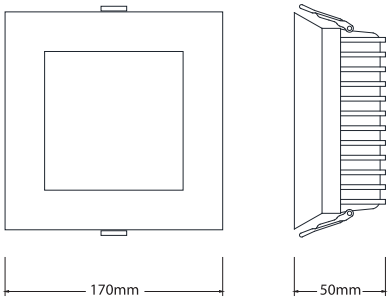

PR-DL-ROS20-06

Photometric



Iten Series

THE **ADVANTAGE** is choosing ADC12 Aluminum lamp fitting, spraying paint process to make lamp smooth and non corrosive with excellent thermal conductivity.

ADJUSTABLE
With adjustable head for different lighting directions.

آیـتـن

PMMA DIFFUSER

With high reflective paper creates even light output
It is an ideal replacement for customers who have
Strictly requirements of environmental protection.

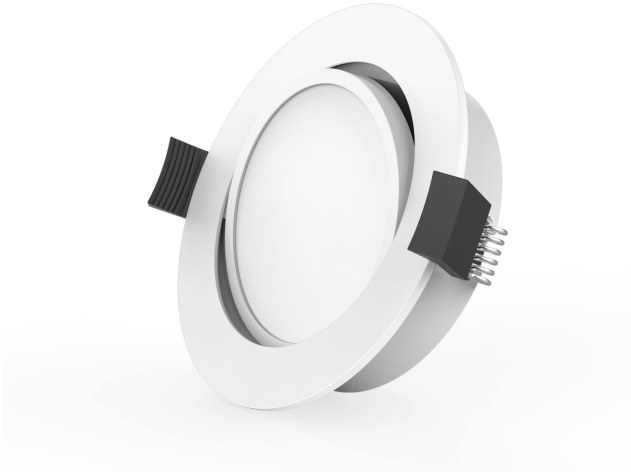

Iten Series

Features

- SMD Recessed downlight with adjustable head.
- The horizontal rotation is around 25 degree, creating diversified lighting effects.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



آیـتـن

Specifications

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-ITE7-01	7 w/550 lm	Ø85xH28mm	White	80	3000k ~ 5700K	Aluminum + PMMA	90°
PR-DL-ITE10-02	10 w/750 lm	Ø104xH30mm					

Product size



PPR-DL-ITE01-7



PR-DL-ITE02-10

Photometric



Isel Series

Excellent Dimming Effect

Triac Dimmable , 1-10V Dimmable and DALI version share great popularity.

آیـسـل

PC Diffuser
with even light output.

Isel Series

Features

- SMD Recessed Downlight.
- Environment friendly, without Mercury or any other hazardous substances.

- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



آیـسـل

Specifications

IP54

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-ISE7-01	7 w/570 lm	Ø85x39mm	White Black	80	3000K 4000K 5000K 5700K	Aluminum + PC	90°
PR-DL-ISE10-02	10 w/940 lm	Ø110x38mm					
PR-DL-ISE15-03	15 w/1560 lm	Ø145x45mm					
PR-DL-ISE18-04	18 w/1870 lm	Ø190x45mm					
PR-DL-ISE25-04	25 w/2600 lm	Ø190x45mm					
PR-DL-ISE25-05	25 w/2600 lm	Ø228x45mm					
PR-DL-ISE35-05	35 w/3640 lm	Ø228x45mm					

Product size



PR-DL-ISE7-01



PR-DL-ISE10-02



PR-DL-ISE15-03



PR-DL-ISE18-04
PR-DL-ISE25-04



PR-DL-ISE25-05
PR-DL-ISE35-05

Photometric



Morgan Series

Great resistance and performance

- Rsistant against water and vapour which extends the service life even in special conditions spaces .
- Elegant classical design and very good lighting effect with easy maouting and maintanace process.

مورغـــان

Morgan Series

Features

- SMD Recessed Downlight IP65.
- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



مورغـــان

Specifications

IP65 RoHS

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-MOR15-01	15 w/1500 lm	Φ115xH55mm	White	80	2700K ~ 6500K	Aluminum + PC	120°
PR-DL-MOR20-02	20 w/2000 lm	Φ155xH67mm					
PR-DL-MOR25-03	25 w/2500 lm	Φ195xH60mm					
PR-DL-MOR30-04	30 w/3000 lm	Φ235xH65mm					
PR-DL-MOR35-04	35 w/3500 lm	Φ235xH65mm					

Product size

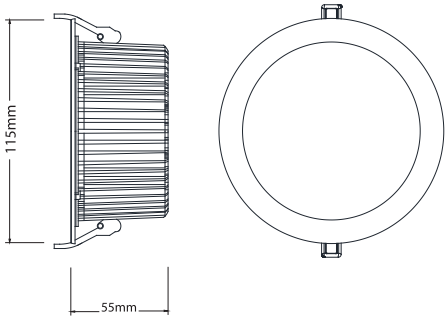

PR-DL-MOR15-01

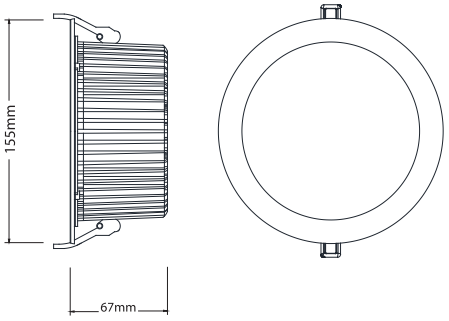

PR-DL-MOR20-02

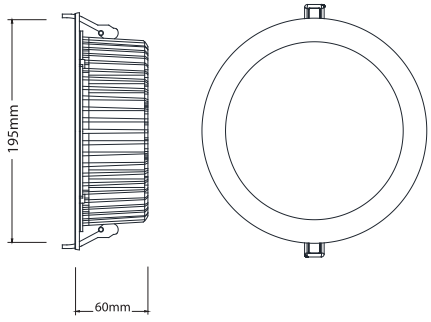

PR-DL-MOR25-03

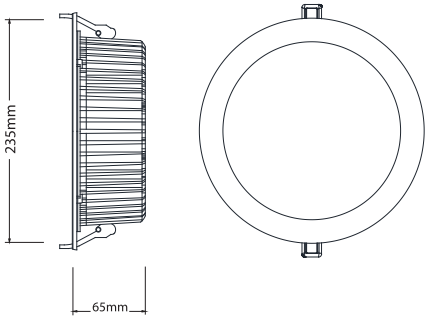

PR-DL-MOR30-04
PR-DL-MOR35-04

Photometric



Chique Series

Several Power options ,great light distribution

- Power obtions to suit any light application .
- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

شيك

PC Diffuser
with even light output.

Chique Series

Features

- Classic and temporary design to suit any application .
- great manufacturing with great material which makes the light with long service life.
- Best quality internal parts from famous manufacturers.

Installation

Surface



شيك

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-CHI6-01	6 w/330 lm	Ø110xH32mm	White	80	3000K 4000K 6000K	Aluminum + PS	120°
PR-DL-CHI12-02	12 w/780 lm	Ø160xH32mm					
PR-DL-CHI18-03	18 w/1320 lm	Ø210xH32mm					
PR-DL-CHI24-04	24 w/1800 lm	Ø280xH32mm					

Product size



PR-DL-CHI6-01



PR-DL-CHI12-02



PR-DL-CHI18-03



PR-DL-CHI24-04

Photometric



Chique Series

Several Power options ,great light distribution

- Power obtions to suit any light application .
- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital
  School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

شيك

PC Diffuser
with even light output.

Chique Series

Features

- Classic and temporary design to suit any application .
- great manufacturing with great material which makes the light with long service life.
- Best quality internal parts from famous manufacturers.

Installation

Surface



شيك

Specifications

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-CHI6-05	6 w/330 lm	Ø110xH32mm	White	80	3000K 4000K 6000K	Aluminum + PS	120°
PR-DL-CHI12-06	12 w/780 lm	Ø160xH32mm					
PR-DL-CHI18-07	18 w/1320 lm	Ø210xH32mm					
PR-DL-CHI24-08	24 w/1800 lm	Ø280xH32mm					

Product size

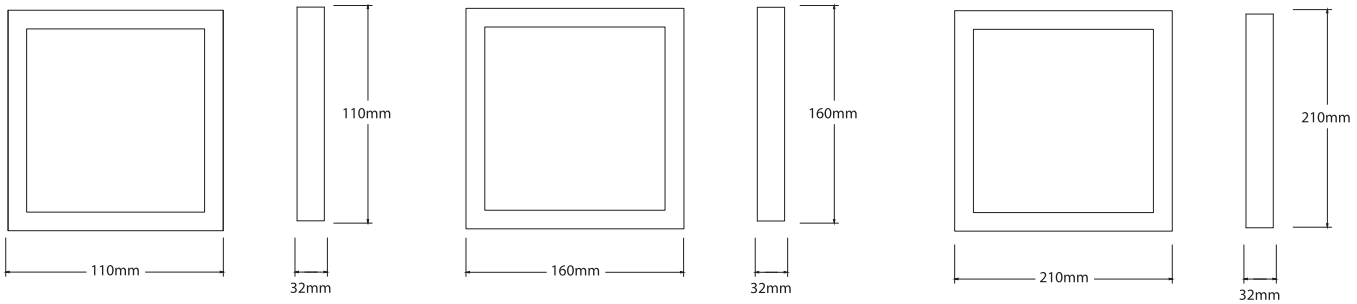

PR-DL-CHI6-05

PR-DL-CHI12-06

PR-DL-CHI18-07

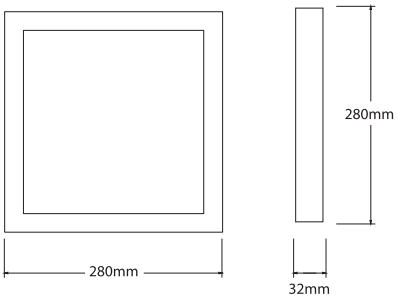

PR-DL-CHI24-08

Photometric



Zain Series

Can reach up to 60w with strong lighting

- Zain ranges up to 60W, can be used when higher output is needed in different retail and health care application
- Application : Office, Basement lighting, Light box and sign back-lighting, Gym lighting, Hospital School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

زين

Great design
very present, giving that extra touch
to a room, ideal to give the space an extra dimension.

Zain Series

Features

- Classic and temporary design to suit any application .
- great manufacturing with great material which makes the light with long service life.
- Best quality internal parts from famous manufacturers.

Installation

Recessed



زين

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-DL-ZAI10-05	10 w/923 lm	Ø120xH55mm	White	80	3000K 6000K	Die cast aluminum	120°
PR-DL-ZAI20-06	20 w/1975 lm	Ø170xH52mm					
PR-DL-ZAI40-07	40 w/2274 lm	Ø225xH65mm					
PR-DL-ZAI60-08	60 w/5200 lm	Ø225xH100mm					

Product size

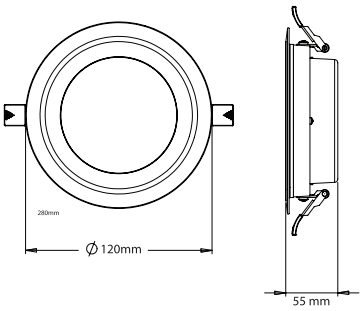

PR-DL-ZAI10-05



PR-DL-ZAI20-06



PR-DL-ZAI40-07

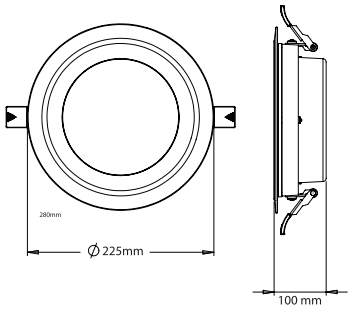

PR-DL-ZAI60-07

Photometric



Linear

Light Series

Roshan Series

Installation

Recessed / Surface / Pendant

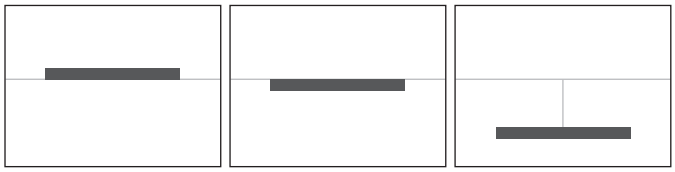

روشـــان

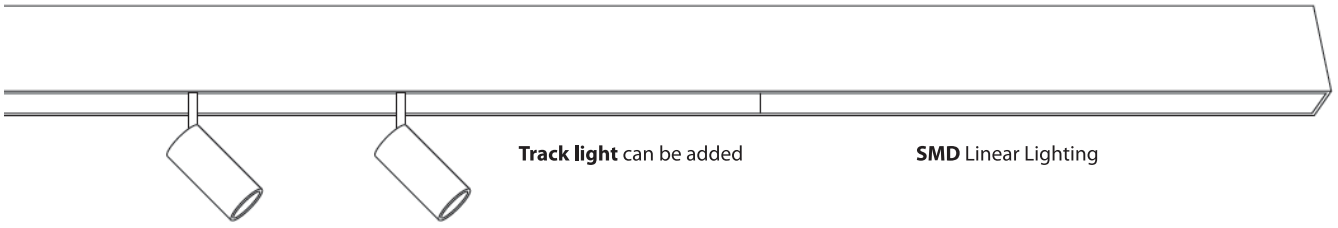

Track light can be added

SMD Linear Lighting

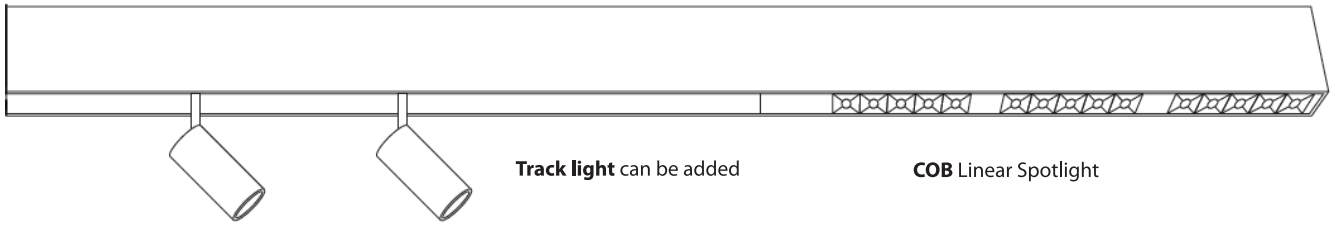

Track light can be added

COB Linear Spotlight

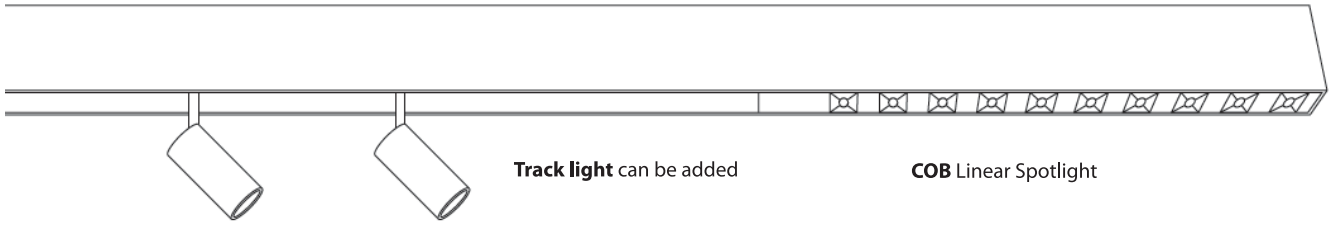

Track light can be added

COB Linear Spotlight

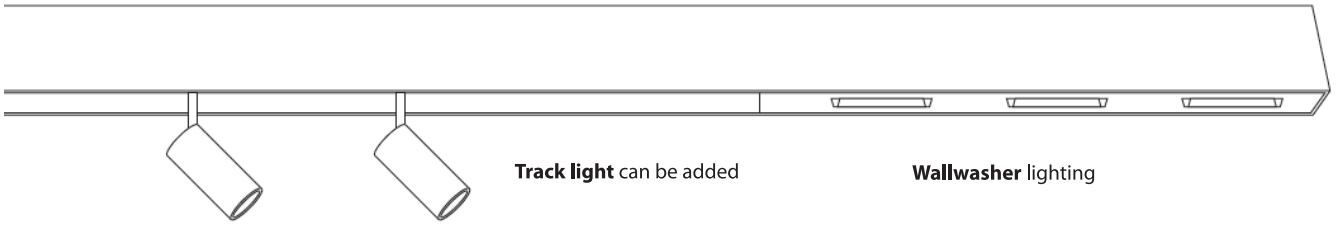

Track light can be added

Wallwasher lighting

Features

- The modular structure of the system makes it easy to expend and adopt to various needs.
- Modularity helps designers adapt the system to the appropriate space, and it is easier to manufacture and install on site.
- The multi angle connector ensures fast and convenient installation, and makes the shape to achieve ever-changing effect more in line with the lighting requirements of modern office environment.

Roshan Series

Features

- A standard wide optic is the best option for achieving efficient general light with excellent uniformity.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

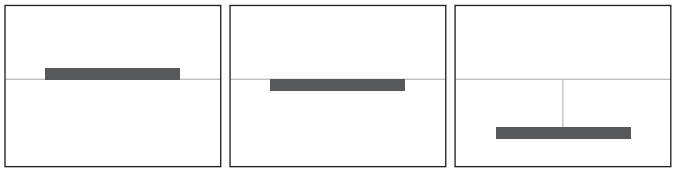

روشـــان

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-ROS15-01	15 w/1250 lm	590x43x66mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum + PMMA	120°
PR-LL-ROS20-02	20 w/1650 lm	880x43x66mm					
PR-LL-ROS30-03	30 w/2460 lm	1170x43x66mm					
PR-LL-ROS37-04	37 w/3750 lm	1460x43x66mm					
PR-LL-ROS45-05	45 w/4540 lm	1750x43x66mm					
PR-LL-ROS52-06	52 w/5200 lm	2040x43x66mm					
PR-LL-ROS60-07	60 w/6060 lm	2330x43x66mm					

Product size

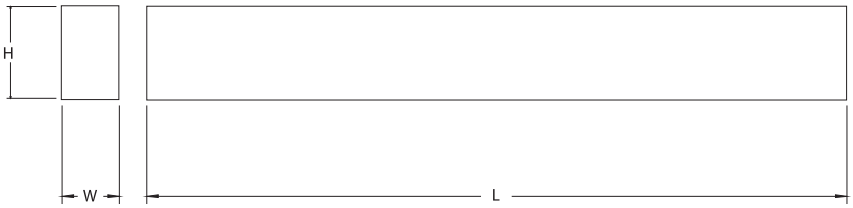

Photometric



Roshan Series

Features

- A narrow 30-degree flood is recom-mended for high-ceiling applications or to direct a more focused beam of light onto work surfaces and table tops.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

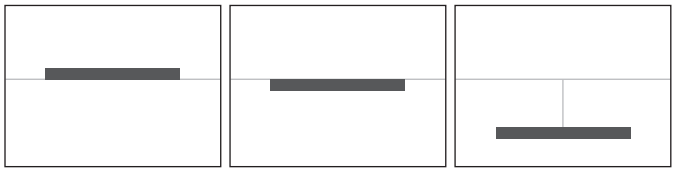

روشـــان

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-ROS30-08	30 w/2460 lm	1170x43x66mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum	30°

Product size

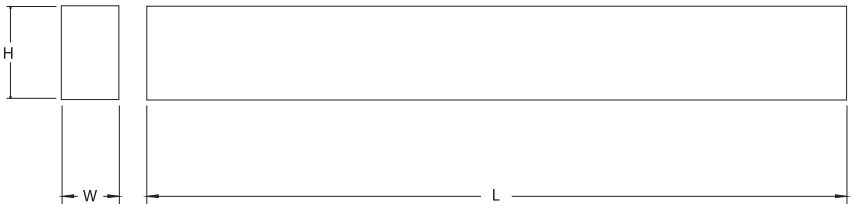

Photometric



Roshan Series

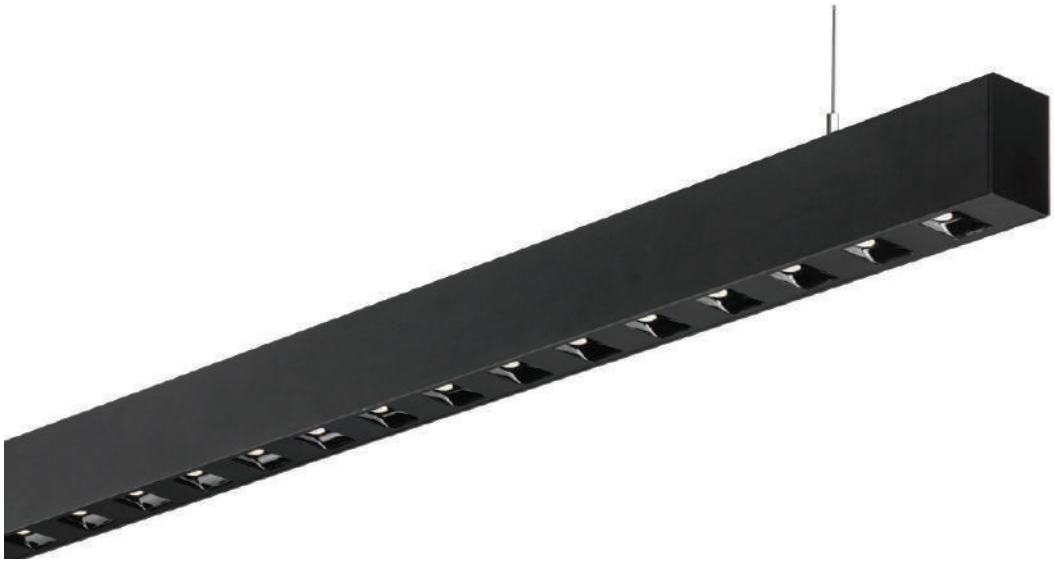

Features

- A narrow 30-degree flood is recom-mended for high-ceiling applications or to direct a more focused beam of light onto work surfaces and table tops.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

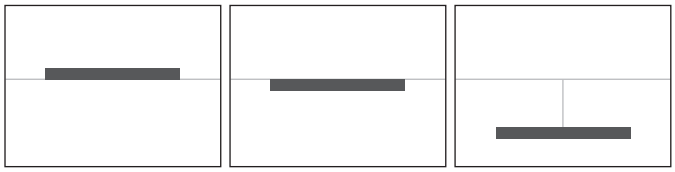

روشـــان

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-ROS20-09	20 w/1800 lm	1170x43x66mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum	30°

Product size

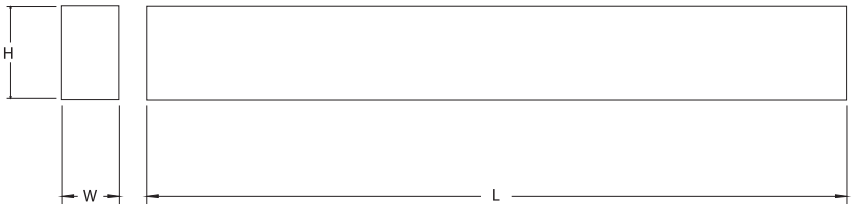

Photometric



Roshan Series

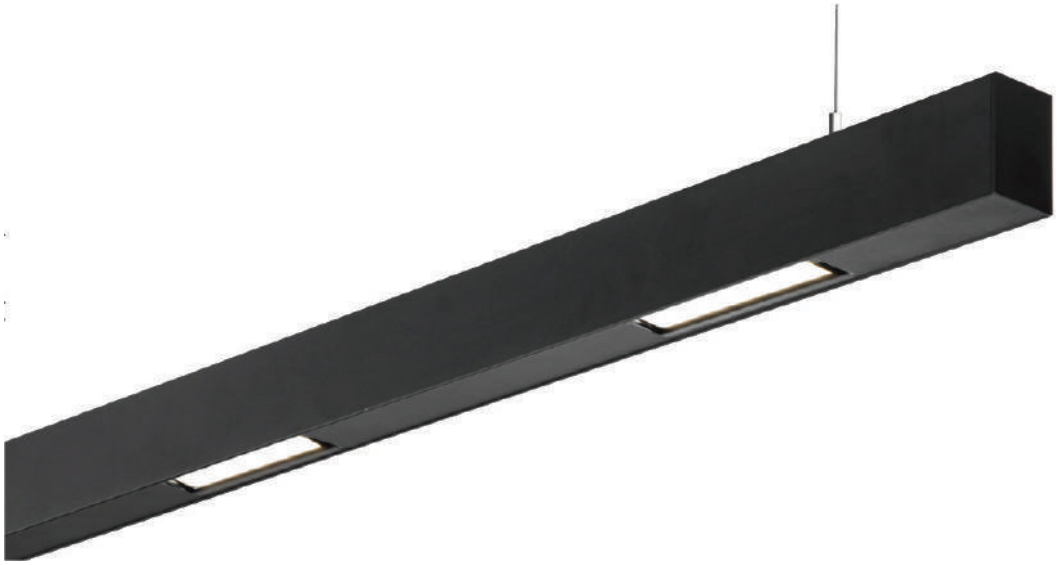

Features

- Unmatched asymmetric wallwash allows even illumination of walls, with exceptional uniformity greater than 0.38 at a setback of 1/7 the wall height. This optic is also suitable for shelving and whiteboards.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

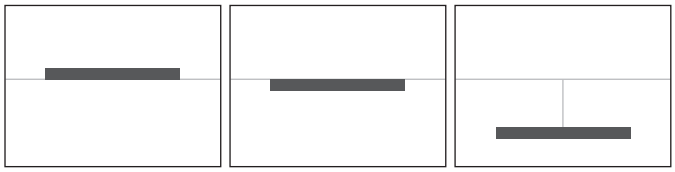

روشـــان

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-ROS30-10	30 w/2460 lm	1170x43x66mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum	80°

Product size

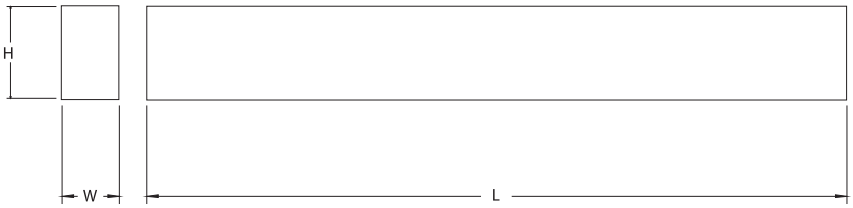

Photometric



Connection Module

L-module	Size(LxWxH)
	305x43x66mm x 2
T-module	Size(LxWxH)
	259x43x66mm x 3
X-module	Size(LxWxH)
	259x43x66mm x 4
Y-module	Size(LxWxH)
	288x43x66mm x 3
120° module	Size(LxWxH)
	312x43x66mm x2

Installation

Recessed / Surface / Pendant

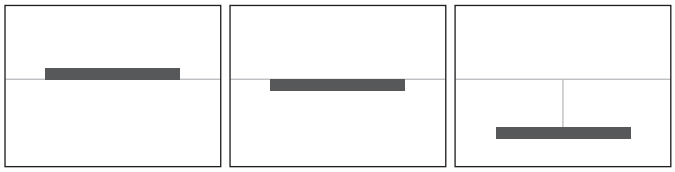

روشـــان

COLLEZIONE
2013
DESIGN

Hivar Series

Installation

Pendant



هيـفـــار

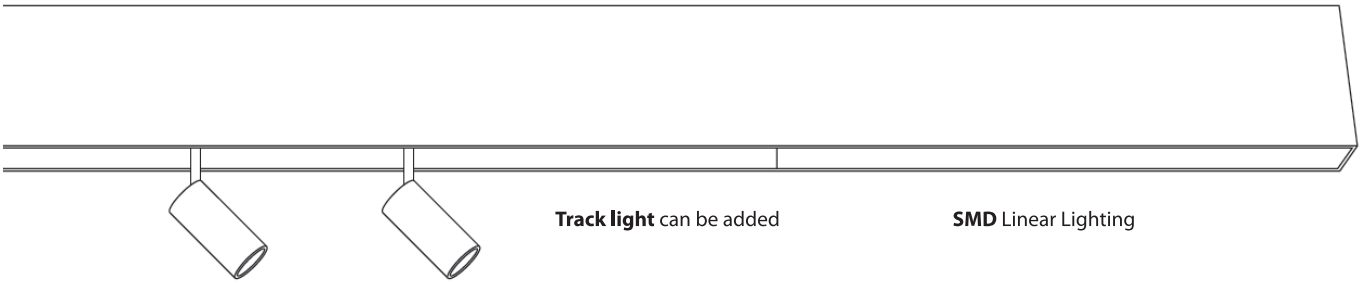

Track light can be added

SMD Linear Lighting

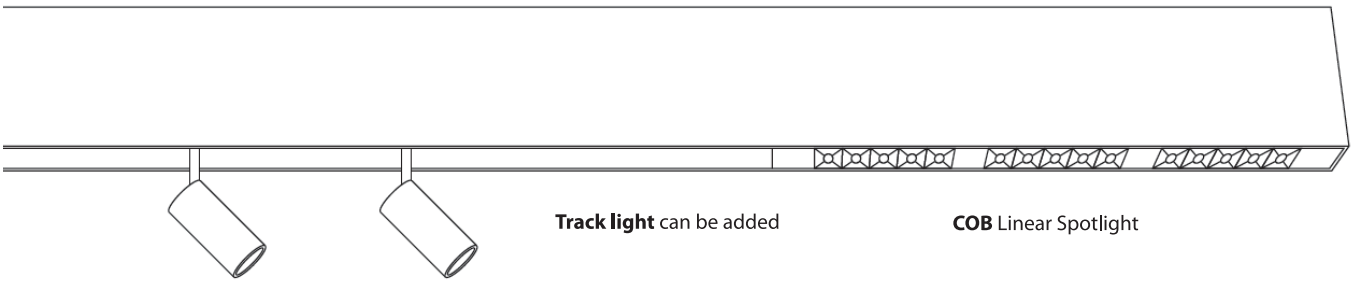

Track light can be added

COB Linear Spotlight

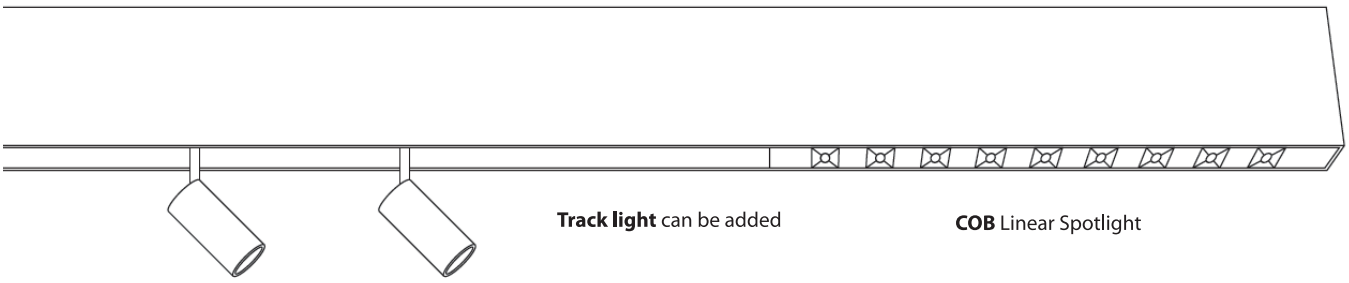

Track light can be added

COB Linear Spotlight

Features

- Up & Down linear light series that meets the needs of all customers and all uses.
- Modularity helps designers adapt the system to the appropriate space, and it is easier to manufacture and install on site.
- The multi angle connector ensures fast and convenient installation, and makes the shape to achieve ever-changing effect more in line with the lighting requirements of modern office environment.

Hivar Series

Features

- A standard wide optic is the best option for achieving efficient general light with excellent uniformity.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Pendant



هیـفـــار

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-HIV24-01	9 w+15 w/740 lm+1250 lm	590x43x132mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum + PMMA	120°
PR-LL-HIV35-02	13 w+22 w/1066 lm+1650 lm	880x43x132mm					
PR-LL-HIV48-03	18 w+30 w/1470 lm+2460 lm	1170x43x132mm					
PR-LL-HIV58-04	22 w+36 w/1650 lm+3750 lm	1460x43x132mm					
PR-LL-HIV75-05	30 w+45 w/2460 lm+4540 lm	1750x43x132mm					
PR-LL-HIV80-06	30 w+50 w/2460 lm+5200 lm	2040x43x132mm					
PR-LL-HIV96-07	36 w+60 w/3750 lm+6060 lm	2330x43x132mm					

Product size

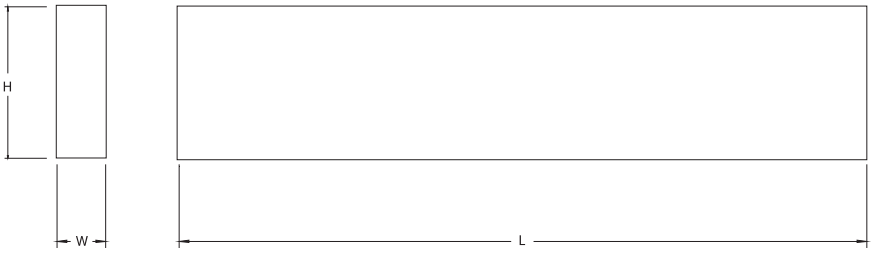

Photometric



Hivar Series

Features

- A narrow 30-degree flood is recom-mended for high-ceiling applications or to direct a more focused beam of light onto work surfaces and table tops.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Pendant



هیـفـــار

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-HIV50-08	20 w+30 w/1640 lm+2460 lm	1170x43x132mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum	30°
PR-LL-HIV70-09	30 w+40 w/2460 lm+4540 lm	1460x43x132mm					

Product size

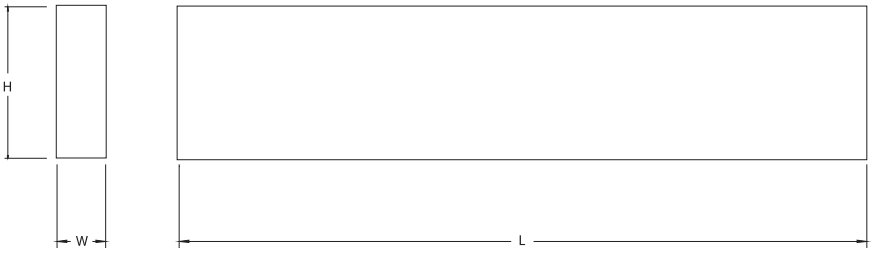

Photometric



Hivar Series

Features

- A narrow 30-degree flood is recom-mended for high-ceiling applications or to direct a more focused beam of light onto work surfaces and table tops.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Pendant



هیـفـــار

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-HIV60-10	20 w+40 w/1640 lm+3495 lm	1170x43x132mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum	30°
PR-LL-HIV75-11	30 w+45 w/2460 lm+4540 lm	1460x43x132mm					

Product size

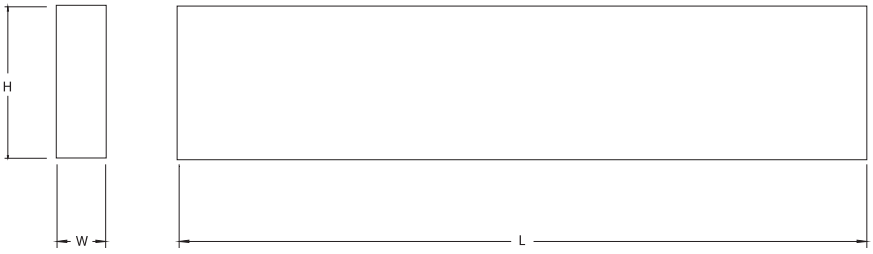

Photometric



Connection Module

L-module	Size(LxWxH)
	305x43x132mm x 2
T-module	Size(LxWxH)
	255x43x132mm x 3
X-module	Size(LxWxH)
	255x43x132mm x 4
Y-module	Size(LxWxH)
	288x43x132mm x 3
120° module	Size(LxWxH)
	313x43x132mm x2

Installation

Pendant



Precisa Series

Features

- Unmatched asymmetric wallwash allows even illumination of walls, with exceptional uniformity greater than 0.38 at a setback of 1/7 the wall height. This optic is also suitable for shelving and whiteboards.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

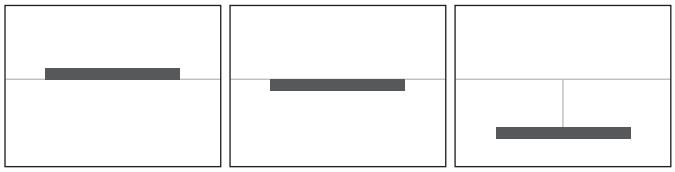

بريشيسا

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-PRE20-01	20 w/800 lm	590x54x78mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum + PMMA	30° x 60°
PR-LL-PRE30-02	30 w/1200 lm	880x54x78mm					
PR-LL-PRE38-03	38 w/1520 lm	1170x54x78mm					
PR-LL-PRE50-04	50 w/2000 lm	1460x54x78mm					
PR-LL-PRE60-05	60 w/2400 lm	1750x54x78mm					
PR-LL-PRE68-06	68 w/2720 lm	2040x54x78mm					
PR-LL-PRE76-07	76 w/3040 lm	2330x54x78mm					

Product size

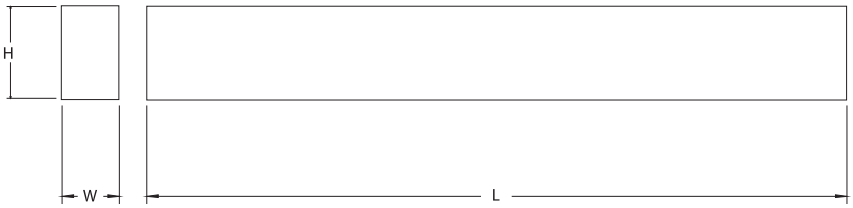

Photometric



Aslan Series

Features

- A standard wide optic is the best option for achieving efficient general light with excellent uniformity.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

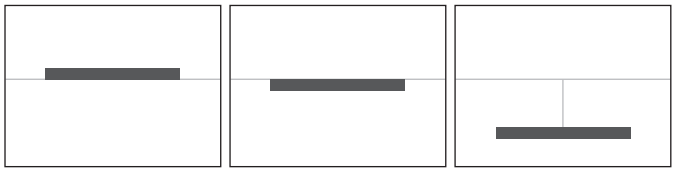

أصـــلان

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-ASL15-01	15 w/1250 lm	590x80x85mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum + PMMA	120°
PR-LL-ASL20-02	20 w/1650 lm	880x80x85mm					
PR-LL-ASL30-03	30 w/2460 lm	1170x80x85mm					
PR-LL-ASL38-04	38 w/3120 lm	1460x80x85mm					
PR-LL-ASL45-05	45 w/3750 lm	1750x80x85mm					
PR-LL-ASL50-06	50 w/4100 lm	2040x80x85mm					
PR-LL-ASL60-07	60 w/4920 lm	2330x80x85mm					

Product size

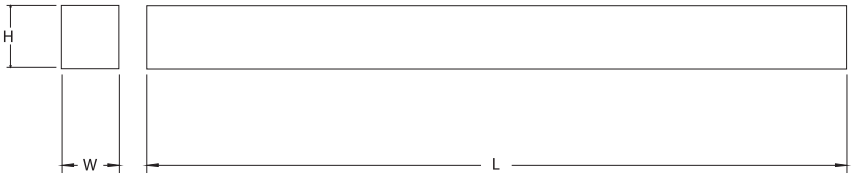

Photometric



Connection Module

L-module	Size(LxWxH)
	305x80x85mm x2
T-module	Size(LxWxH)
	238x80x85mm x3
X-module	Size(LxWxH)
	238x80x85mm x4
Y-module	Size(LxWxH)
	278x80x85mm x3
120° module	Size(LxWxH)
	325x80x85mm x2

Installation

Recessed / Surface / Pendant

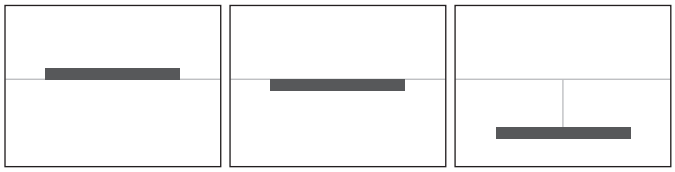

Lami Series

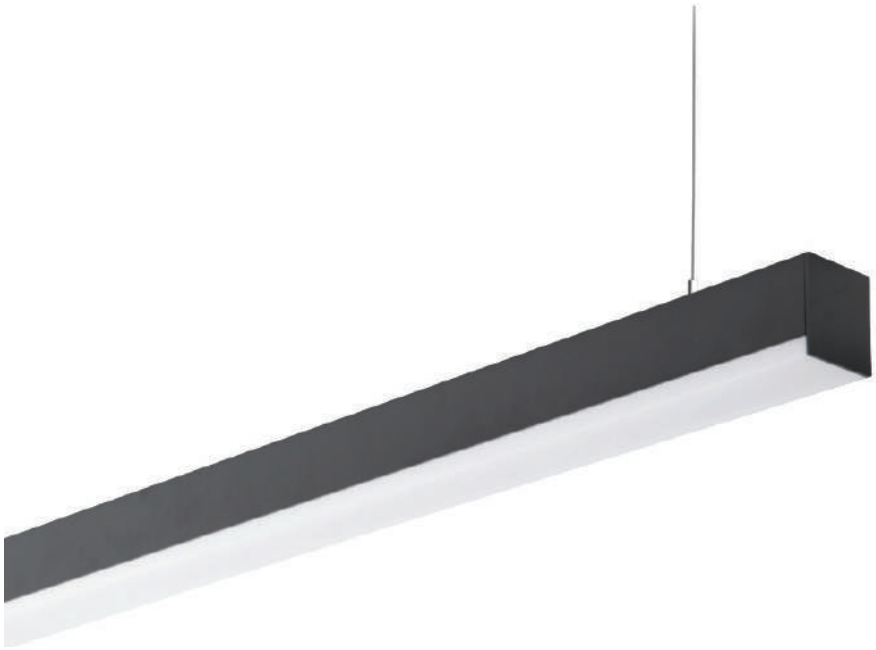

Features

- A standard wide optic is the best option for achieving efficient general light with excellent uniformity.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed / Surface / Pendant

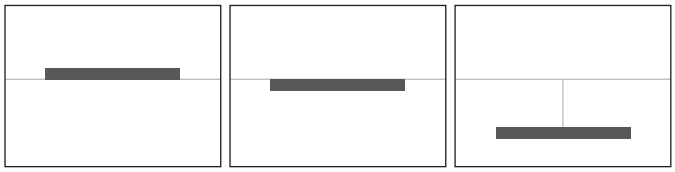

لامـــي

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-LAM15-01	15 w/1250 lm	590x57.4x68mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum + PMMA	120°
PR-LL-LAM20-02	20 w/1650 lm	880x57.4x68mm					
PR-LL-LAM30-03	30 w/2460 lm	1170x57.4x68mm					
PR-LL-LAM38-04	38 w/3116 lm	1460x57.4x68mm					
PR-LL-LAM45-05	45 w/3690 lm	1750x57.4x68mm					
PR-LL-LAM50-06	50 w/4100 lm	2040x57.4x68mm					
PR-LL-LAM60-07	60 w/4920 lm	2330x57.4x68mm					

Product size

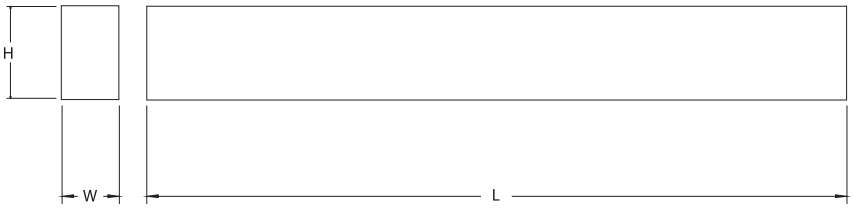

Photometric



Connection Module

L-module	Size(LxWxH)
	305x57.4x68mm x 2
T-module	Size(LxWxH)
	250x57.4x68mm x 3
X-module	Size(LxWxH)
	250x57.4x68mm x 4
Y-module	Size(LxWxH)
	285x57.4x68mm x 3
120° module	Size(LxWxH)
	320x57.4x68mm x2

Installation

Recessed / Surface / Pendant

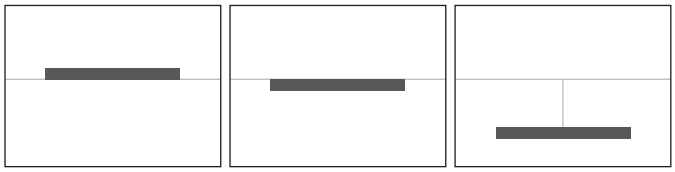

Linar Series

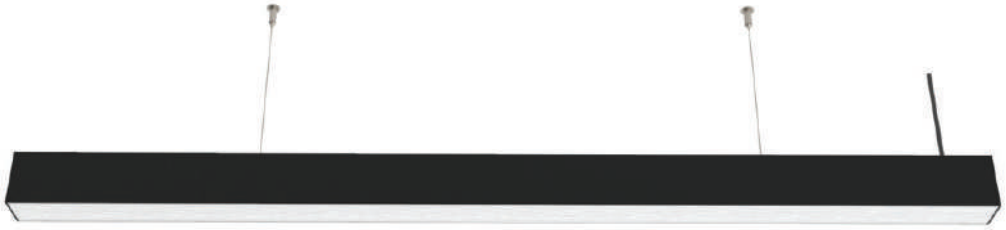

Features

- LED suspended linear light series with multiple options can be mounted in a variety of styles, lengths and combinations to enhance architectural interest or complement the chosen space.
- High luminous efficiency and great color rendering index light.
- Linkable design.

- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Surface / Pendant

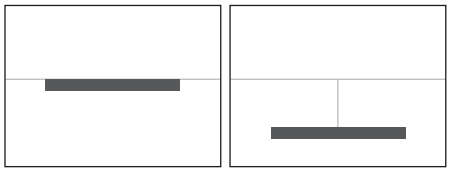

لیـــنار

Specifications

IP40

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-LIN30-09	30 w/3150 lm	900x50x70mm	Sand black Sand white	80	3000K 4000K 5000K 6500K	Aluminum + PMMA	110°
PR-LL-LIN36-03	36 w/3780 lm	1200x50x70mm					
PR-LL-LIN50-05	50 w/5250 lm	1500x50x70mm					
PR-LL-LIN60-05	60 w/6300 lm	1500x50x70mm					

Product size

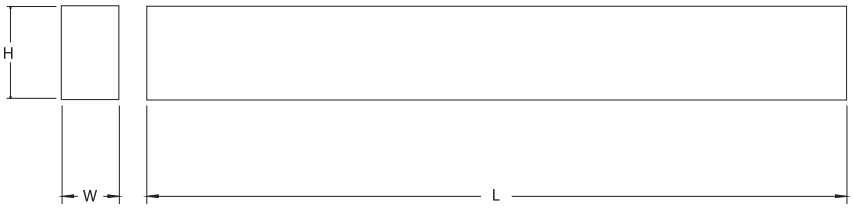

Photometric



Kenan Series

Features

- A standard wide optic is the best option for achieving efficient general light with excellent uniformity.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



كنـــان

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-KEN15-01	15 w/1250 lm	590x100x80mm	Sand black Matte black Sand white Matte white Wood grain Silver	82	3000K 4000K 5000K 6000K	Aluminum + PMMA	120°
PR-LL-KEN20-02	20 w/1650 lm	880x100x80mm					
PR-LL-KEN30-03	30 w/2460 lm	1170x100x80mm					
PR-LL-KEN37-04	37 w/3116 lm	1460x100x80mm					
PR-LL-KEN45-05	45 w/3690 lm	1750x100x80mm					
PR-LL-KEN52-06	52 w/4100 lm	2040x100x80mm					
PR-LL-KEN60-07	60 w/4920 lm	2330x100x80mm					

Product size

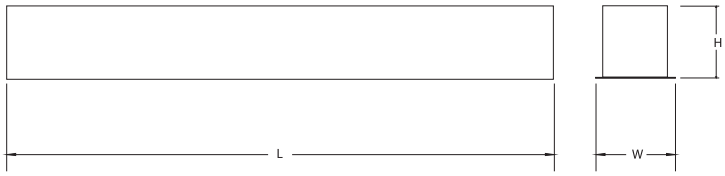

Photometric



Connection Module

L-module	Size(LxWxH)
	315x100x80mm x2
T-module	Size(LxWxH)
	248x100x80mm x3
X-module	Size(LxWxH)
	248x100x80mm x4
Y-module	Size(LxWxH)
	278x100x80mm x3
120° module	Size(LxWxH)
	335x100x80mm x2

Installation

Recessed



Gizli Series

Features

- LED recessed linear light series with multiple options can be mounted in a variety of styles, lengths and combinations to enhance architectural interest or complement the chosen space.
- High luminous efficiency and great color rendering index light

- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



جيـــزلي

Specifications

IP40

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-GIZ30-06	30 w/3300 lm	900x62x48mm	Sand black Sand white	80	3000K 4000K 5000K 6500K	Aluminum + PMMA	110°
PR-LL-GIZ36-07	36 w/3960 lm	1200x62x48mm					
PR-LL-GIZ50-08	50 w/5500 lm	1500x62x48mm					

Product size

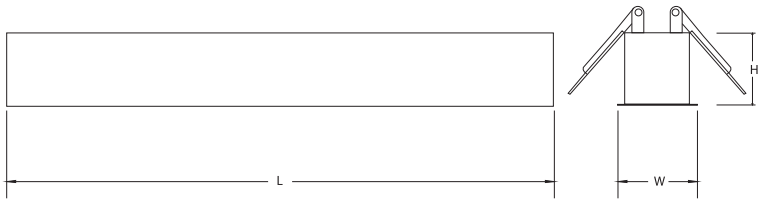

Photometric



Line Series

Installation

Surface / Pendant / Rack ceiling mounted

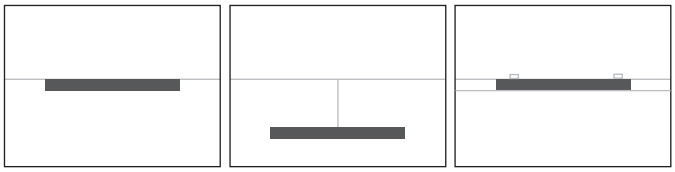

لاين

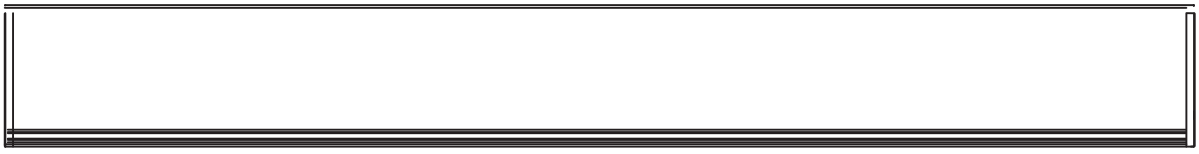

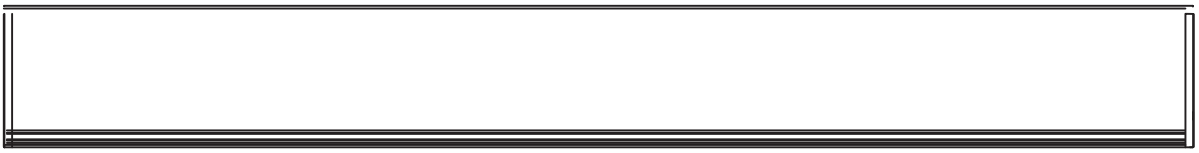

Linelinear light series with multiple options can be mounted in a variety of styles, lengths and combinations to enhance architectural interest or complement the chosen space. Similarly, it can be used to create stunning accent lighting. Protective white shade makes light soft and even, also prevent glare to damage eyes. High luminous efficiency and great color rendering index light, creates comfortable lighting environment

Line Series

Features

- Several lengthes and ways of installation with great and stable lighting effect which lasts for long life span
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Surface / Pendant / Rack ceiling mounted

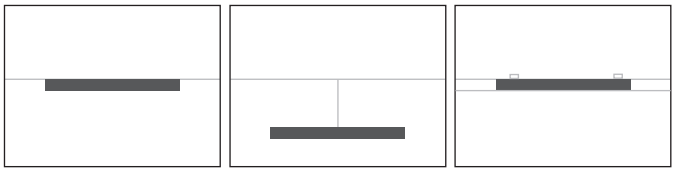

لاين

Specifications

IP40

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-LIN18-01	18 w/1620 lm	590x70x55mm	Black White	80	3000K 4200K 6500K	Aluminum + PMMA	160°
PR-LL-LIN24-02	24 w/2160 lm	880x70x55mm					
PR-LL-LIN40-03	40 w/3240 lm	1180x70x55mm					
PR-LL-LIN48-04	48 w/4320 lm	1180x70x55mm					

Product size

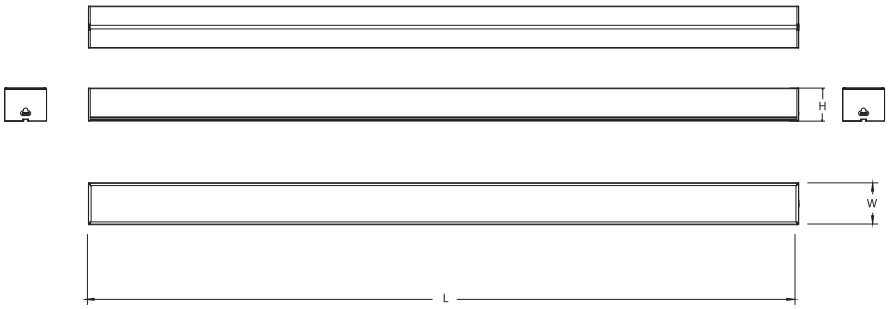

Photometric



Dot Series

Installation

Surface / Pendant / Rack ceiling mounted

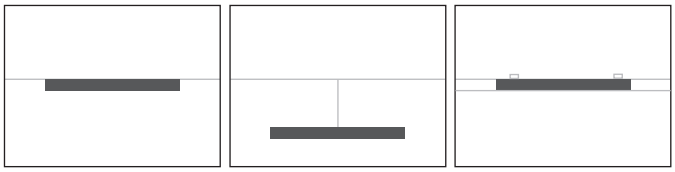

دوت

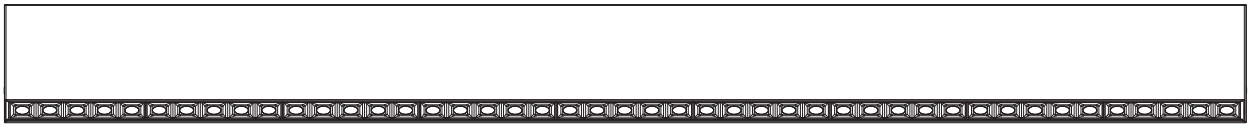

DOT linear light combines High luminous efficiency and great color rendering index light, creates comfortable lighting environment, helps working efficient increase or better experience for more using environment.
High quality Aluminum housing for good heat dissipation elegant and durable finishing.

Dot Series

Features

- Distinguish lighting effect due to the dotted lighting source which provides a great atmosphere for any application.
- Elegant and artistic design to be suitable for almost any space with two options for light body white or black.
- Several power ranges and several lengeths to fulfill your desire

- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Surface / Pendant / Rack ceiling mounted

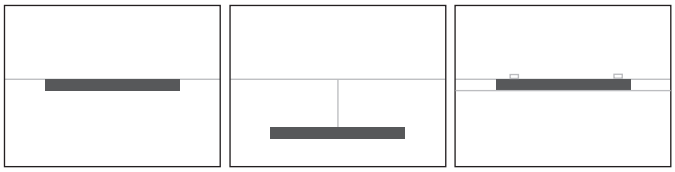

دوت

Specifications

IP40

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-DOT18-01	18 w/1620 lm	670x35x55mm	Black White	80	3000K 4200K 6500K	Aluminum + PMMA	160°
PR-LL-DOT36-02	36 w/3240 lm	1180x35x55mm					

Product size

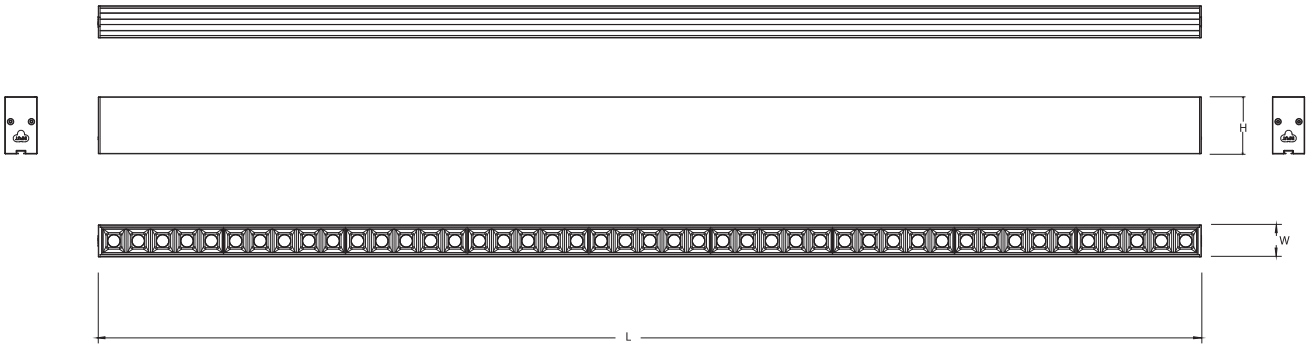

Photometric



Wonder Series

Features

- LED recessed linear light series with multiple options can be mounted in a variety of styles, lengths and combinations to enhance architectural interest or complement the chosen space.
- High luminous efficiency and great color rendering index light

- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Recessed



وندر

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-WON24-01	24 w/2400 lm	600x90x35mm	Black White Silver	80	3000K 4000K 5000K 6000K	Aluminum + PC	120°
PR-LL-WON40-02	40 w/4000 lm	1200x90x35mm					
PR-LL-WON50-03	50 w/5000 lm	1500x90x35mm					
PR-LL-WON24-04	24 w/2400 lm	600x75x35mm					
PR-LL-WON40-05	40 w/4000 lm	1200x75x35mm					
PR-LL-WON50-06	50 w/5000 lm	1500x75x35mm					

Product size

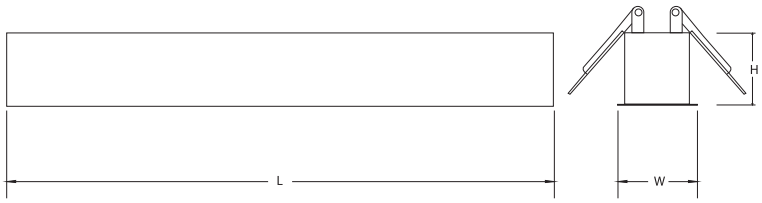

Photometric



Lama Series

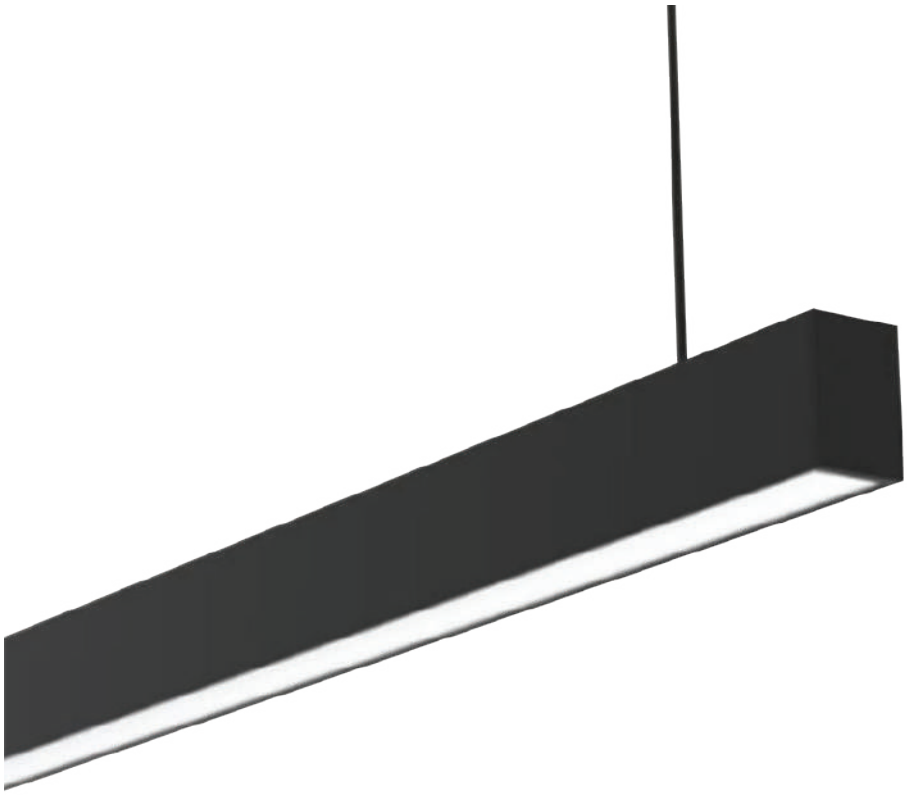

Features

- An elegant and great designed surface mounted linear light with beautiful lighting effect and long life span.
- Application : Office, Gym lighting, Hospital, School, Supermarket, Restaurant, Market, Government institution, Showrooms and other indoor public places.

Installation

Surface / Pendant

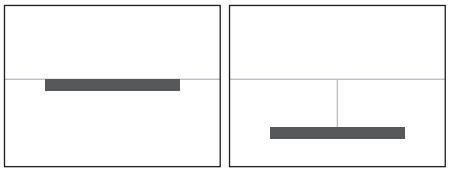

لامـــا

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-LL-LAM24-01	24 w/2400 lm	600x50x70mm	Black White Silver	80	3000K 4000K 5000K 6000K	Aluminum + PC	120°
PR-LL-LAM40-02	40 w/4000 lm	1200x50x70mm					
PR-LL-LAM50-03	50 w/5000 lm	1500x50x70mm					
PR-LL-LAM60-04	60 w/6000 lm	1800x50x70mm					
PR-LL-LAM60-05	60 w/6000 lm	2400x50x70mm					
PR-LL-LAM80-06	80 w/8000 lm	3000x50x70mm					

Product size

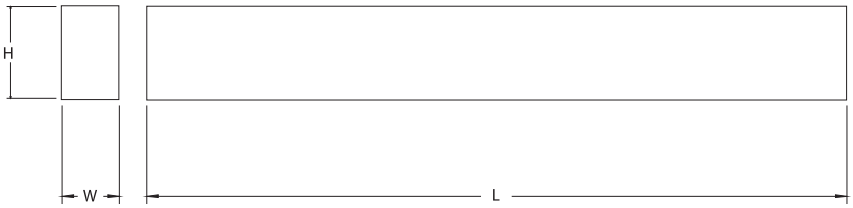

Photometric



Batten

Light Series

Archo Series

Elegant and Exceptional design
High durability and protection

Archo batten LED light series are using high-quality luminous source and power supply
Surface and Suspended mounted

آرکـــــو

Archo Series

Features

- LED replaceable board
- Even light distribution
- Suspension strap attached to the lamp and base part to convenient electrician's installation

- Application: Healthcare, Warehouses, Hospitals & Clinics, Supermarkets, Schools and Government institutions

Installation

Surface / Pendant

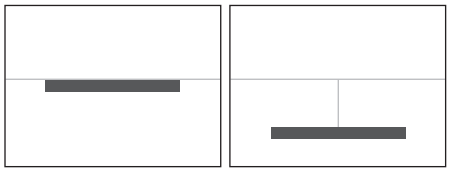

آرکـــــو

Specifications

IP44

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-BL-ARC20-01	20 w/2000 lm	L672xW74xH83mm	White	80	3000K 4000K 5000K 6000K	Aluminum + PC	120°
PR-BL-ARC40-02	40 w/4000 lm	L1227xW74xH83mm					
PR-BL-ARC50-02	50 w/5000 lm	L1227xW74xH83mm					

Product size

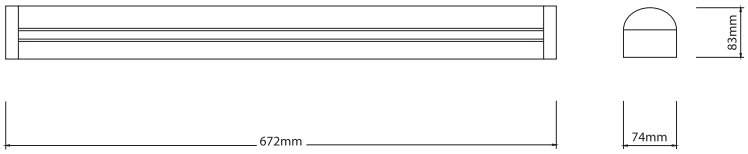

PR-BL-ARC20-01

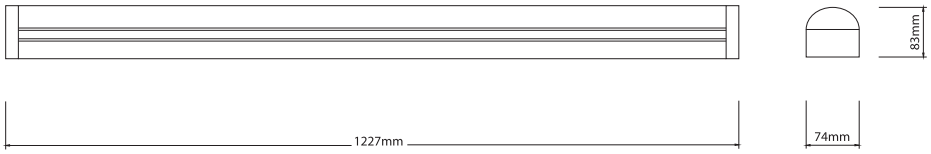

PR-BL-ARC40-02
PR-BL-ARC50-02

Photometric



EXIT

Sign Series

Oslo Series

Features

- Surface mounted general purpose, cost-effective emergency escape route sign.
- Quick connection and easy installation with three options of mounting, ceiling mounting, wall bracket mounting and recessed ceiling mounting.
- Battery backup that reaches duration of 3 hours.
- Replaceable pictogram design with double face plate (universal).

- Application: Healthcare, Warehouses, Hospitals & Clinics, Supermarkets, Schools and Government institutions

Installation

Surface



أوســـلو

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	Distance	CCT	Body Material	Duration
PR-EM-OSL3-01	3 w/36 lm	L266xW214xH45mm	White	24 m	6000K	ABS	1 hour 2 hours 3 hours
PR-EM-OSL3-02	3 w/56 lm	L331xW248xH45mm		30 m			

Product size

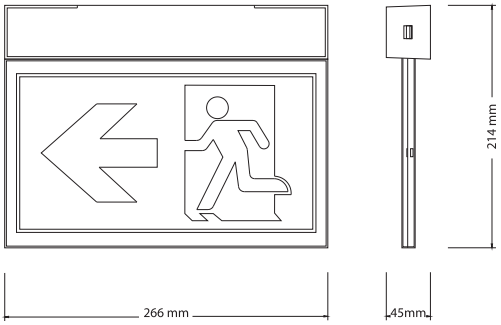

PR-EM-OSL3-01

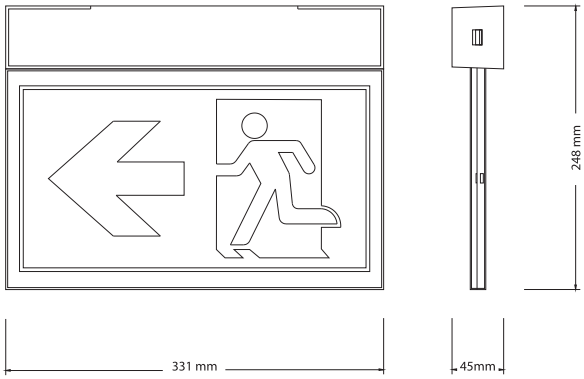

PR-EM-OSL3-02

Pictogram

Porto Series

Features

- Pendant general purpose, cost-effective emergency escape route sign.
- Quick connection and easy installation with three options of mounting, ceiling mounting, wall bracket mounting and recessed ceiling mounting.
- Battery backup that reaches duration of 3 hours.
- Replaceable pictogram design with double face plate (universal).

- Application: Healthcare, Warehouses, Hospitals & Clinics, Supermarkets, Schools and Government institutions

Installation

Pendant



بورتـــو

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	Distance	CCT	Body Material	Duration
PR-EM-POR3-01	3 w/36 lm	L266xW159xH45mm	White	24 m	6000K	ABS	1 hour 2 hours 3 hours
PR-EM-POR3-02	3 w/56 lm	L331xW193xH45mm		30 m			

Product size

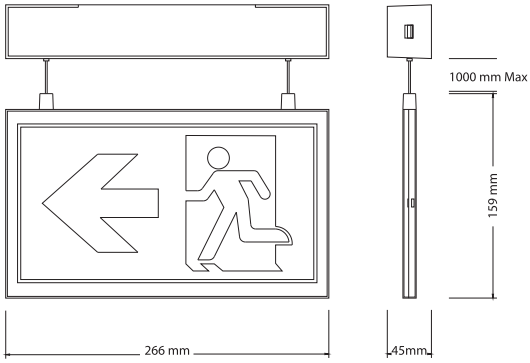

PR-EM-POR3-01

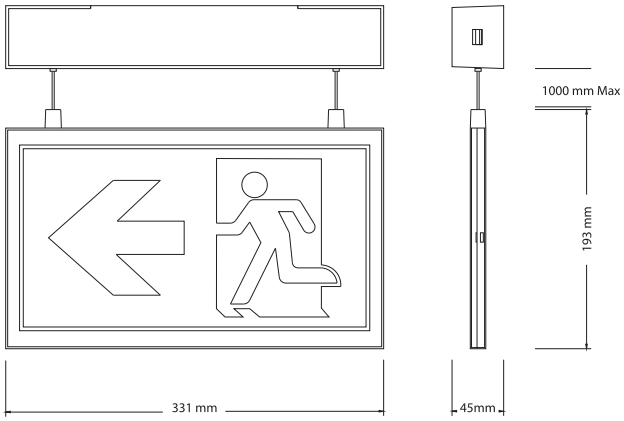

PR-EM-OSL3-02

Pictogram

Solo Series

Features

- Wall mounted general purpose, cost-effective emergency escape route sign.
- Quick connection and easy installation on wall.
- Battery backup that reaches duration of 3 hours.
- Replaceable pictogram design with single face plate.

- Application: Healthcare, Warehouses, Hospitals & Clinics, Supermarkets, Schools and Government institutions

Installation

Surface



سـولو

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	Distance	CCT	Body Material	Duration
PR-EM-SOL3-01	3 w/36 lm	L265xW159xH45mm	White	24 m	6000K	ABS	1 hour 2 hours 3 hours
PR-EM-SOL3-02	3 w/56 lm	L331xW199xH45mm		30 m			

Product size

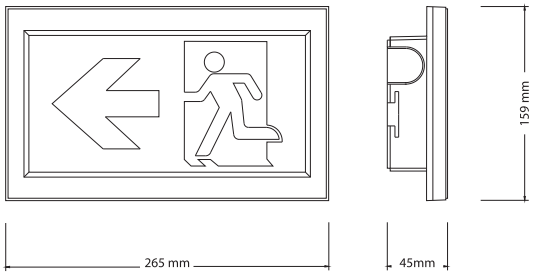

PR-EM-SOL3-01

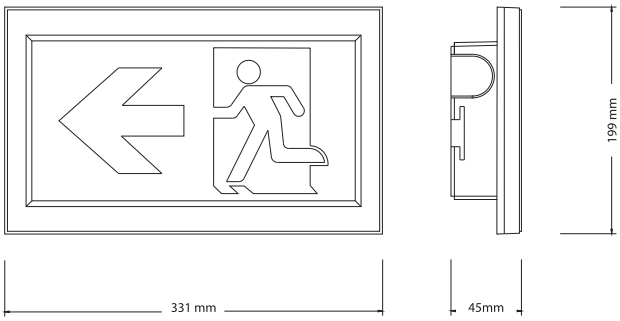

PR-EM-SOL3-02

Pictogram

Floor

Light Series

Largo Series

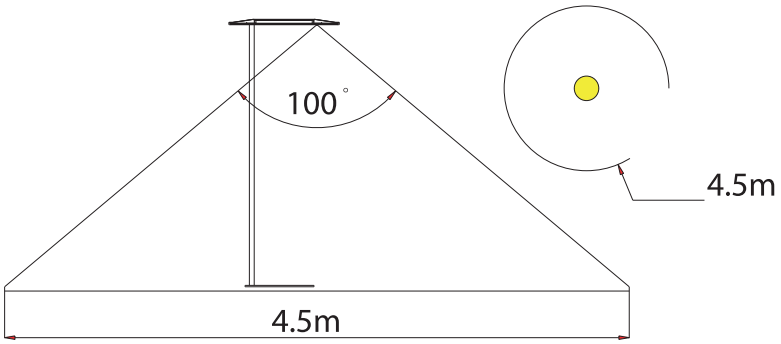

لارجـــــو

Largo floor lamp series, An easy-to-add lighting solution for any space lighting like office, living room, study, family room, etc .. Sufficient Brightness, with the combination of direct and indirect light output, it provides bright but natural light distribution. No dizzy light, providing you excellent bright light. The iron base allows the floor lamp to be firmly held in a particular position without moving or shaking.
Excellent Replacement for ceiling Light , it can be used for small space lighting or supplementary lighting for large space. It is convenient and cost saving for official or residential lighting.

Largo Series

Features

- Double sided lighting design, ultra-thin, glare-free
- 0 - 10V intelligent sensor system
- Touch screen switch, feel more intelligent lighting effect .

- Application: School, Office, Classroom, Commercial lighting and other applications.

Installation

Direct / Indirect Light



لارجـــــو

Specifications

IP20

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-FL-LAR60-01	60 w/3375 lm	800x320x1940mm	White Silver Black Orange Green Yellow	82 90	3000K 4000K 6000K	Aluminum	92.9°

Product size

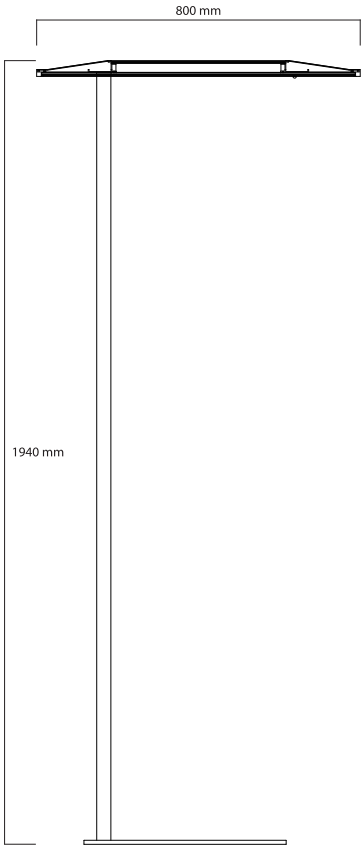

Photometric



Flaco Series

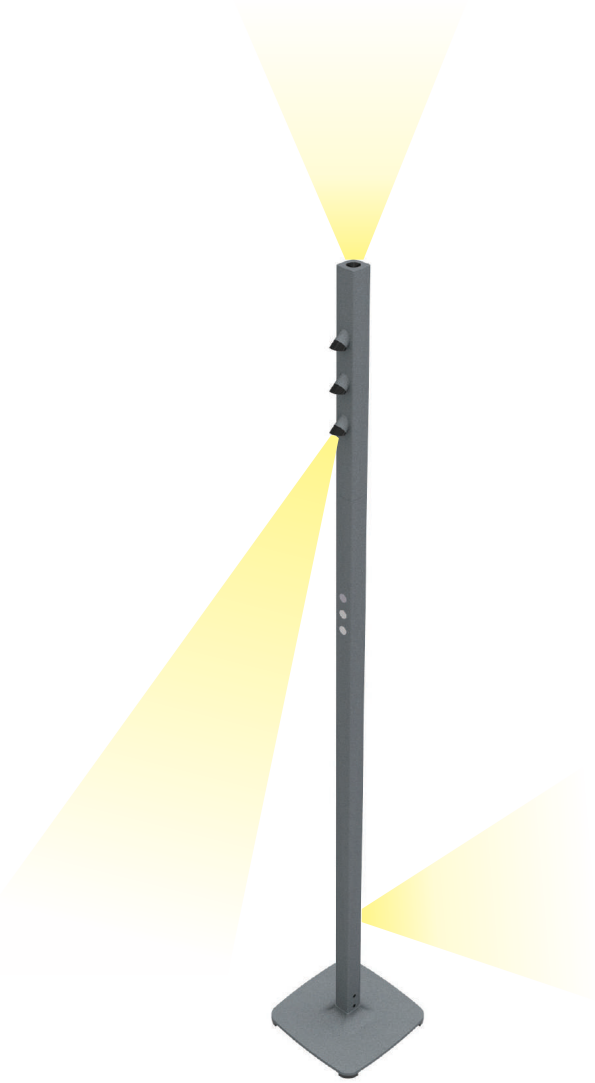

فـلاكـــو

FLACO floor lamp series , housing made of high pressure extruded aluminum construction, die-cast aluminum and caps with no visible screws, surface treatment is the sand oxidantion and flame retardant PC lens+ flame retardant PC anti-glare cover, UV and corrosion resistance , with beautiful appearance , the scientific proportion and reasonable dimensions. Flexible installing methods, with excellent heat dissipation . The luminarie combined with the concept of direct/indirect lighting distributions, applying ant-glare diffuser and double transmission princlple of secondary reflection, flame retradant PC honeycomb grille, without visible dark spot or light gaps in seamless continuous lighting system. Advanced thermal managment technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Flaco Series

Features

- Floor lamp with high-quality aluminum alloy, fine sand oxidantion (white, black, brown gray) matte powder coating (matte white).
- Flame retardant PC lens + flame retardant PC anti-glare cover.

- Application : School, Office, Classroom ,Commercial lighting and other applications.

Installation

Direct / Indirect Light



فـلاكـــو

Specifications

Model	Power / Flux	L x W x H	Colour	CRI	CCT	Body Material	Beam Angel
PR-FL-FLA25-01	25 w/2000 lm	250x250x1700mm	White Silver Dark Gray Black	90	3000K 4000K	Aluminum	46°

Product size

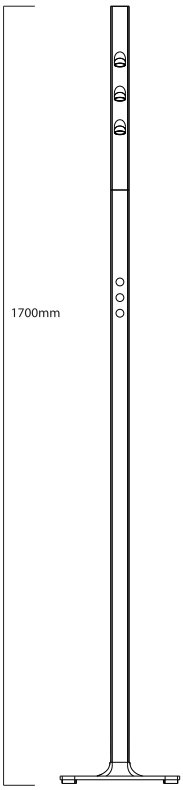

Photometric

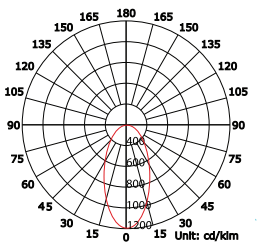

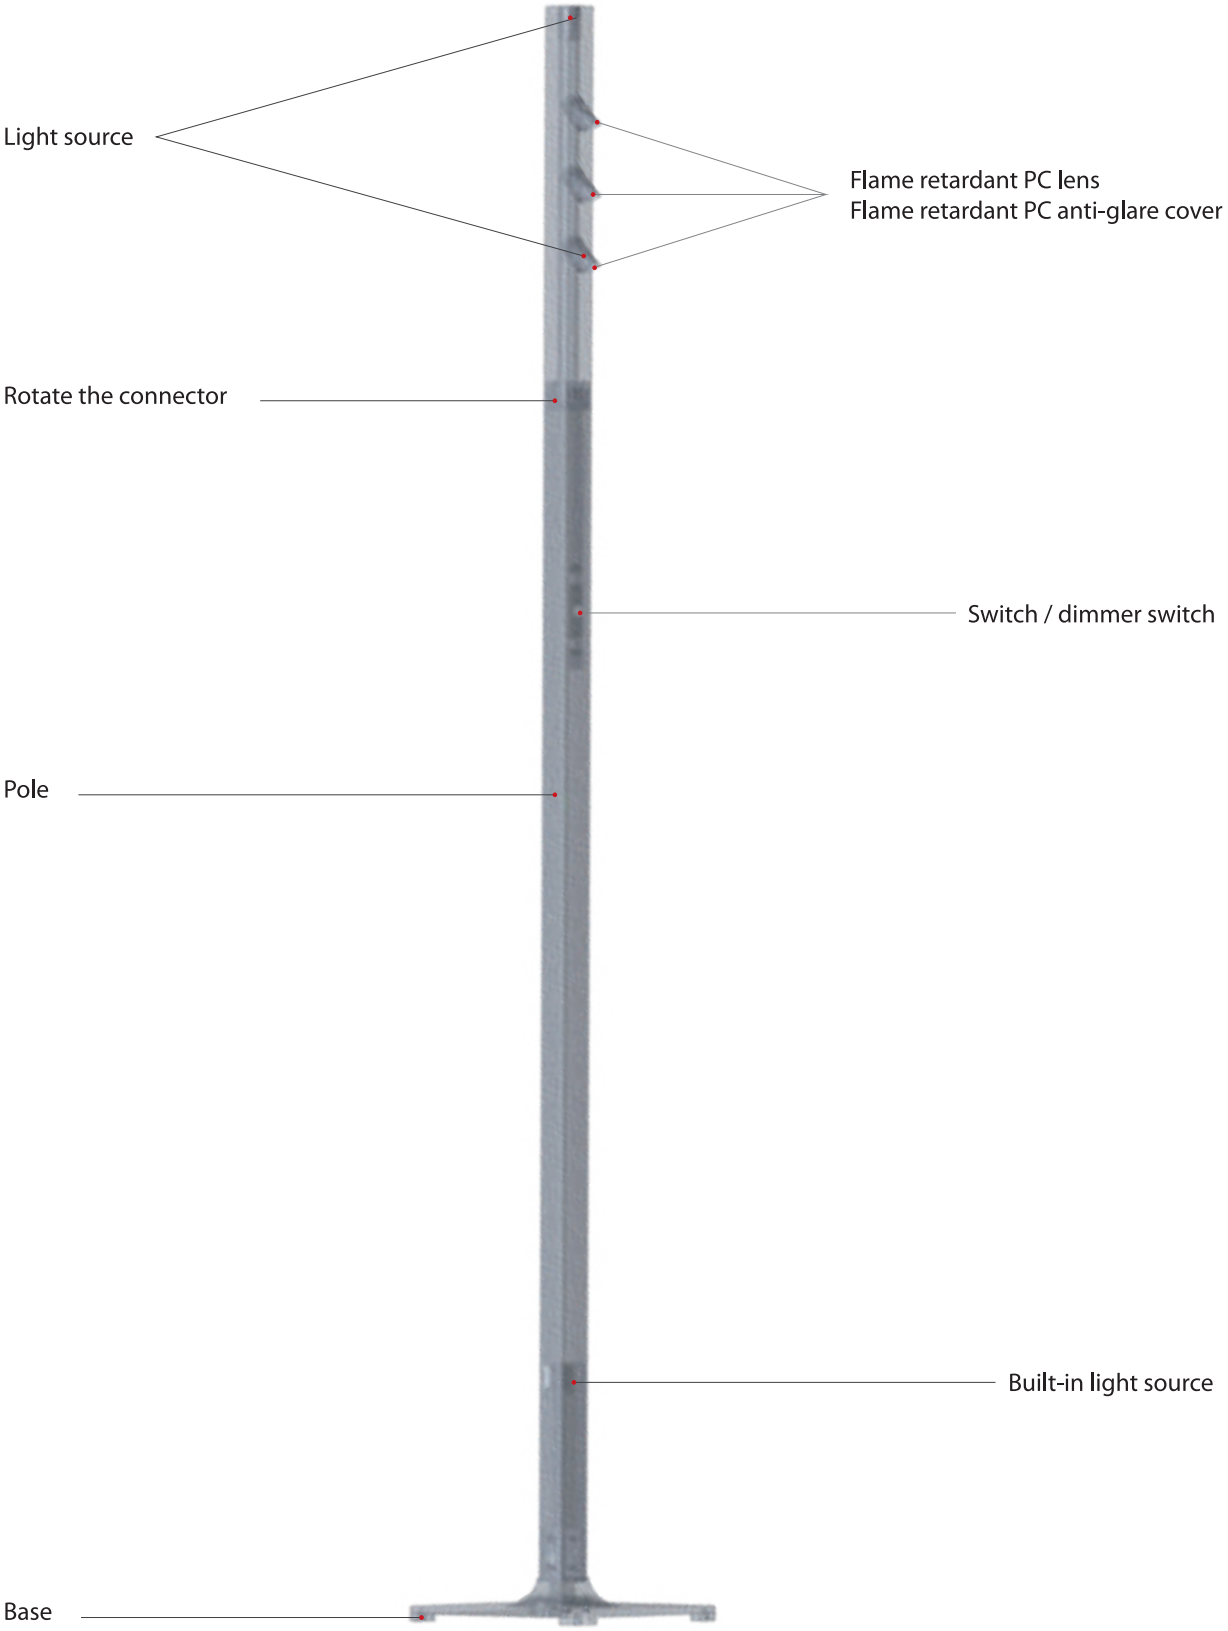
Light source
Flame retardant PC lens
Flame retardant PC anti-glare cover
Rotate the connector
Switch / dimmer switch
Pole
Built-in light source
Base

Symbols

General Lighting
Lighting designed to provide a substantially uniform level of illumination throughout an area.

Indoor Lighting

Ingress Protection Rating
Refer to the level of protection offered against solids and liquids.

Flicker free

DALI
Lighting control system.

High Quality Product

Long Life Span

CE Certification
CE stands for "Conformité Européenne" means that the manufacturer takes responsibility for the compliance of a product with all applicable European health, safety, performance and environmental requirements.

RoHS Certification
Product level compliance based on the European Union's Directive 2002/95/EC, the Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment

CCC Certification
China Compulsory Certification (CCC) is similar to other certifications for product quality standardization, such as the European CE system.

SAA Certification
Standards Association of Australia, a third-party certification body to issue Certificates of Conformity for declared and Level 3 products and Certificates of Suitability for all non-declared electrical equipment.

TUV Certification
A sampling of the product has been tested for safety and found to meet the minimum requirements of the German Equipment and Product Safety Act.

Index

Panel Light Series — **16**

Zia Series — 18
Sama Series — 24
Aura Series — 26
Dana Series — 30
Sadan Series — 34
Tulip Series — 36
Anmar Series — 42
Mavi Series — 48

Downlight Series — **52**

Rossana Series — 54
Iten Series — 60
Isel Series — 64
Morgan Series — 68
Chique Series — 72
Zain Series — 80

Linear Light Series — **84**

Roshan Series — 86
Hivar Series — 98
Percisa Series — 108
Aslan Series — 110
Lami Series — 114
Linar Series — 118
Kenan Series — 120
Gizli Series — 124
Line Series — 126
Dot Series — 130
Wonder Series — 134
Lama Series — 136

Batten Light Series — **138**

Archo Series — 140

Exit Sign Series — **144**

Oslo Series — 146
Porto Series — 148
Solo Series — 150

Floor Lamp Light Series — **152**

Largo Series — 154
Flaco Series — 158

Symbols — **164**

Index — **165**

www.rafeed.co